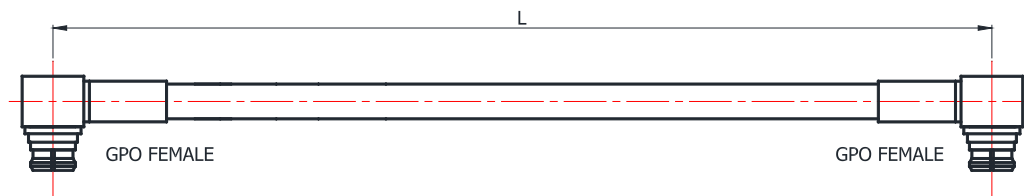


RG316, FLEXIBLE CABLE,
GPO(SMP)(FEMALE)-GPO(SMP) (FEMALE)**GAR3-GPWFGPWF-XXX**

* Label and Shrinking tube design depend on customer's request.

Configuration

| | |
|---------------------------|------------------|
| Connector 1 Type | GPO Female |
| Connector 1 Body Style | Right Angle |
| Body Material and Plating | CuBe Gold Plated |
| Connector 1 Mount Method | None |
| Connector 2 Type | GPO Female |
| Connector 2 Body Style | Right Angle |
| Body Material and Plating | CuBe Gold Plated |
| Connector 2 Mount Method | None |
| Cable Type | RG316 |

Electrical Specifications

| | |
|-------------------------|--------------------------------------|
| Impedance | 50 Ω |
| Frequency | DC to 3 GHz |
| Return Loss/VSWR | 1.35 |
| Shielding Effectiveness | <-60dB @ 1GHz |
| Power Handling | 88watt @ 1.5GHz at sea level,VSWR1.0 |

Environmental Data

| | |
|-------------------|-----------------|
| Temperature Range | -45°C to +125°C |
| RoHS | Compliant |

Cable Specifications

| | |
|----------------------------|----------------------|
| Center Conductor | Silver plated copper |
| Dielectric | Solid extruded PTFE |
| Outer Conductor | FEP |
| Capacitance(pF/m) | 94 |
| Velocity of propagation(%) | 70 |
| Min. bending radius(mm) | 15 |
| Jacket Diameter(mm) | 2.45 |
| Weight(kg/100m) | 1.5 |

Part Number List

| Part Number | Length [mm] | Insertion Loss ≤(dB) | |
|--------------------|-------------|----------------------|------|
| | | 1GHz | 3GHz |
| GAR3-GPWFGPWF-5000 | 5000±20 | 4.65 | 7.85 |
| GAR3-GPWFGPWF-2000 | 2000±20 | 1.95 | 3.25 |
| GAR3-GPWFGPWF-1000 | 1000±10 | 1.05 | 1.75 |
| GAR3-GPWFGPWF-500 | 500±10 | 0.65 | 1.04 |

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.