


210P SERIES, FLEXIBLE CABLE ,
3.5MM(MALE)- 3.5MM(MALE)

GAU6-35M35M-XXX

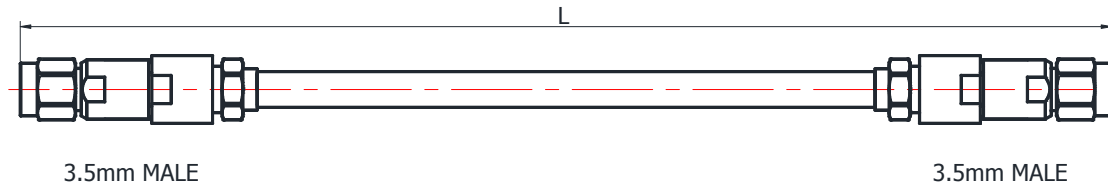

* Label and Shrinking tube design depend on customer's request.

Configuration	
Connector 1 Type	3.5mm Male
Connector 1 Body Style	Straight
Body Material and Plating	Passivated Stainless Steel
Connector 1 Mount Method	None
Connector 2 Type	3.5mm Male
Connector 2 Body Style	Straight
Body Material and Plating	Passivated Stainless Steel
Connector 2 Mount Method	None
Cable Type	GT210P
Electrical Specifications	
Impedance	50 Ω
Frequency	DC to 26.5 GHz
Return Loss/VSWR	1.35 to 26.5 GHz
Phase Stability vs. Flexure	2° @ 18GHz
Shielding Effectiveness	<-100dB @ 1GHz
Phase Matching	On Request
Signal Delay	On Request
Power Handling	380watt @ 5GHz at sea level, VSWR1.0
Environmental Data	
Temperature Range	-40°C to +85°C
RoHS	Compliant

Cable Specifications

Center Conductor	Silver plated copper
Dielectric	Low Density PTFE
Jacket	Polyurethane
Capacitance(pF/m)	86
Velocity of propagation(%)	77
Min. bending radius(mm)	9.65
Jacket Diameter(mm)	5.5
Weight(kg/100m)	6.53

Part Number List

Part Number	Length [mm]	Insertion Loss ≤(dB)			
		6GHz	10GHz	18GHz	26.5GHz
GAU6-35M35M-10000	10000±50	5.98	7.82	10.64	13.1
GAU6-35M35M-5000	5000±50	3.11	4.05	5.51	6.78
GAU6-35M35M-4000	4000±40	2.53	3.31	4.48	5.52
GAU6-35M35M-3000	3000±30	1.95	2.54	3.46	4.26
GAU6-35M35M-2000	2000±20	1.37	1.79	2.45	2.98
GAU6-35M35M-1000	1000±10	0.79	1.04	1.41	1.73
GAU6-35M35M-800	800±10	0.68	0.89	1.22	1.48
GAU6-35M35M-500	500±10	0.57	0.66	0.92	1.12
GAU6-35M35M-200	200±10	0.36	0.47	0.59	0.77

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.