

DC-BLOCK

Gwave

DC-Block 50Ω, 2.92 mm
Connector,0.1-40G

GDCB-40G-292


Electrical Specifications

Frequency Range [GHz]:	0.1 ~ 40
Insertion Loss [dB]:	≤1.25
Maximum VSWR :	≤1.50
Impedance [Ohms]:	50
DC Maximum Voltage[V]:	50

Mechanical Specifications

Size[mm]:	Ø9*29
Temperature Range[°C]:	-35~+85
Cavity:	Aluminum Alloy Conductive Oxide
Male Inner Conductor:	Gold-plated Copper
Female Inner Conductor:	PGold-plated Beryllium Bronze
Connector Type:	2.92mm
Weight[g]:	15

Outline Drawing

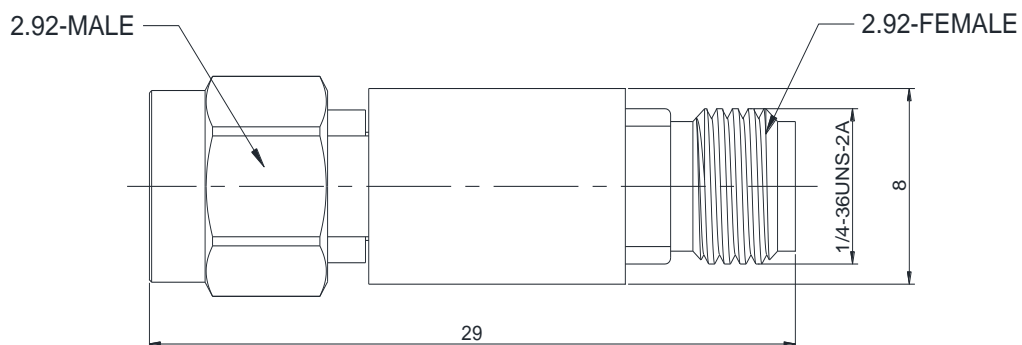

*Dimensions are in mm

Notes

*Dimensional Tolerance:±2%