

CONCEALED HINGE SERIES

暗铰链系列



把对运动的追求与先进的液压缓冲技术相结合
让每个家庭都享受由精湛科技带来的不一样的体验。

*Combine the pursuit of sports with advanced hydraulic buffering technology.
Let every family enjoy the different experience brought by exquisite technology.*

专注成就专业
滑轨·铰链

快装不锈钢缓冲铰链 WR系列

STAINLESS STEEL HYDRAULIC HINGE SERIES

材质:304不锈钢
表面处理:光铬
开启角度:110°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.2mm
带自动缓冲闭合功能
适用门板厚度:14-20mm

Main Material:304Stainless steel
Finish:CP
Opening hinge:110°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness: 1.2mm
Quicky fitting with self-closing
Door thickness:14-20mm



产品图片
Product Picture

订购信息：
ORDERING INFORMATION

固装不锈钢缓冲铰链 WL系列

STAINLESS STEEL HYDRAULIC HINGE SERIES

材质:304不锈钢
表面处理:光铬
开启角度:95°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.2mm
带自动缓冲闭合功能
适用门板厚度:14-20mm

Main Material:304 Stainless steel
Finish:CP
Opening hinge:95°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness: 1.2mm
Quicky fitting with self-closing
Door thickness:14-20mm



产品图片
Product Picture

订购信息：
ORDERING INFORMATION

直臂/全盖
FULL OVERLAY
产品质量:103.7g
PRODUCT QUALITY:

WR209

中弯/半盖
HALF OVERLAY
产品质量:103g
PRODUCT QUALITY:

WR208

大弯/无盖
INSERT
产品质量:106.1g
PRODUCT QUALITY:

WR207

直臂/全盖
FULL OVERLAY
产品质量:92.6g
PRODUCT QUALITY:


WL209

中弯/半盖
HALF OVERLAY
产品质量:92.3g
PRODUCT QUALITY:


WL208

大弯/无盖
INSERT
产品质量:94.5g
PRODUCT QUALITY:


WL207

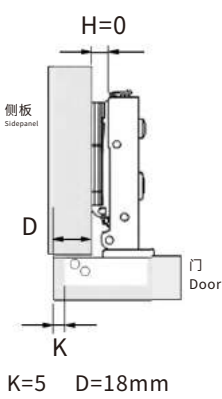


D \ H \ K	3	4	5	6	7
0	16	17	18	19	20
2	14	15	16	17	18
4	12	13	14	15	16

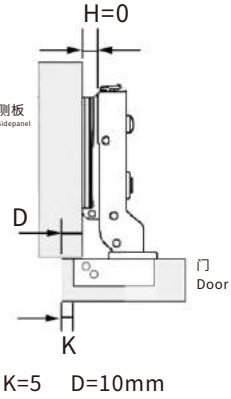


D \ H \ K	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

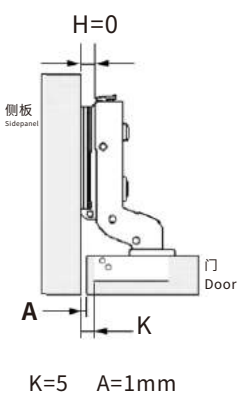


D \ H \ K	3	4	5	6	7
0	-3	-2	-1	0	1
2	-5	-4	-3	-2	-1
4	-7	-6	-5	-4	-3

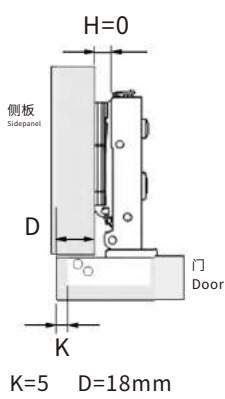

D \ H \ K	3	4	5	6	7
0	16	17	18	19	20
2	14	15	16	17	18
4	12	13	14	15	16

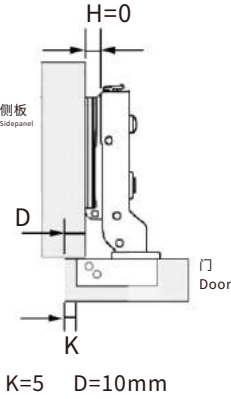

D \ H \ K	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

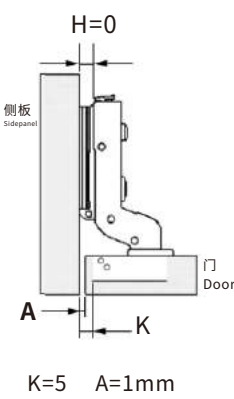

D \ H \ K	3	4	5	6	7
0	-3	-2	-1	0	1
2	-5	-4	-3	-2	-1
4	-7	-6	-5	-4	-3

快装不锈钢缓冲铰链UR系列

STAINLESS STEEL HYDRAULIC HINGE SERIES

材质:201不锈钢
表面处理:光铬
开启角度:110°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.0mm
带自动缓冲闭合功能
适用门板厚度:14-20mm
Main Material:201 Stainless steel
Finish:CP
Opening hinge:110°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness: 1.0mm
Quickly fitting with self-closing
Door thickness:14-20mm



产品图片
Product Picture

订购信息：
ORDERING INFORMATION

固装不锈钢缓冲铰链 UL系列

STAINLESS STEEL HYDRAULIC HINGE SERIES

材质:201不锈钢
表面处理:光铬
开启角度:95°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.0mm
带自动缓冲闭合功能
适用门板厚度:14-20mm
Main Material:201 Stainless steel
Finish:CP
Opening hinge:95°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness: 1.0mm
Quickly fitting with self-closing
Door thickness:14-20mm



产品图片
Product Picture


订购信息：
ORDERING INFORMATION

直臂/全盖
FULL OVERLAY

产品质量:107g
PRODUCT QUALITY:



UR209

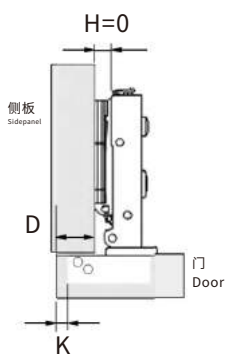

K=5 D=18mm


D \ H \ K	3	4	5	6	7
0	16	17	18	19	20
2	14	15	16	17	18
4	12	13	14	15	16

中弯/半盖
HALF OVERLAY

产品质量:106g
PRODUCT QUALITY:



UR208

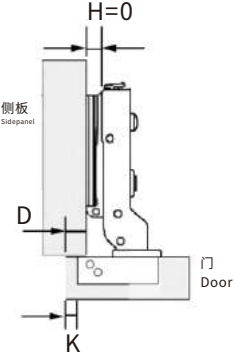

K=5 D=10mm


D \ H \ K	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

大弯/无盖
INSERT

产品质量:107g
PRODUCT QUALITY:



UR207

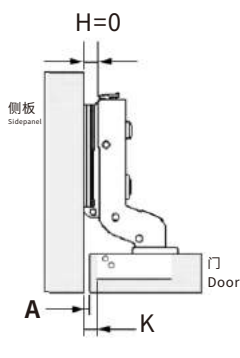

K=5 A=1mm


D \ H \ K	3	4	5	6	7
0	-3	-2	-1	0	1
2	-5	-4	-3	-2	-1
4	-7	-6	-5	-4	-3

直臂/全盖
FULL OVERLAY

产品质量:93g
PRODUCT QUALITY:



UL209

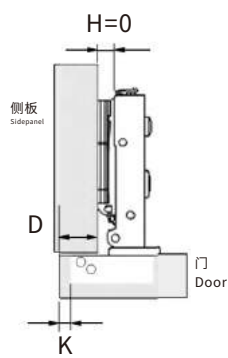

K=5 D=18mm


D \ H \ K	3	4	5	6	7
0	16	17	18	19	20
2	14	15	16	17	18
4	12	13	14	15	16

中弯/半盖
HALF OVERLAY

产品质量:93g
PRODUCT QUALITY:



UL208

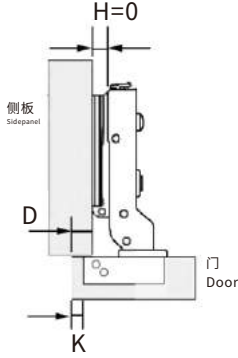

K=5 D=10mm


D \ H \ K	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

大弯/无盖
INSERT

产品质量:96g
PRODUCT QUALITY:



UL207

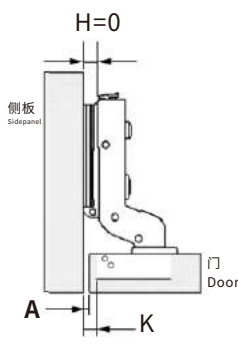

K=5 A=1mm

D \ H \ K	3	4	5	6	7
0	-3	-2	-1	0	1
2	-5	-4	-3	-2	-1
4	-7	-6	-5	-4	-3

快装缓冲铰链 RG

HYDRAULIC HINGE SERIES

材质:冷轧钢
表面处理:镀镍
开启角度:110°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.2mm
带自动缓冲闭合功能
适用门板厚度:14-20mm
Main Material:Coid-rolledsteel
Finish:Nickel Plated
Opening hinge:110°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness: 1.2mm
Quicky fitting with self-closing
Door thickness:14-20mm

订购信息:
ORDERING INFORMATION




产品图片
Product Picture

固装加厚缓冲铰链 KG

HYDRAULIC HINGE SERIES

材质:冷轧钢
表面处理:镀镍
开启角度:95°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.2mm
带自动缓冲闭合功能
适用门板厚度:14-20mm
Main Material:Coid-rolledsteel
Finish:Nickel Plated
Opening hinge:95°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness: 1.2mm
Quicky fitting with self-closing
Door thickness:14-20mm

订购信息:
ORDERING INFORMATION

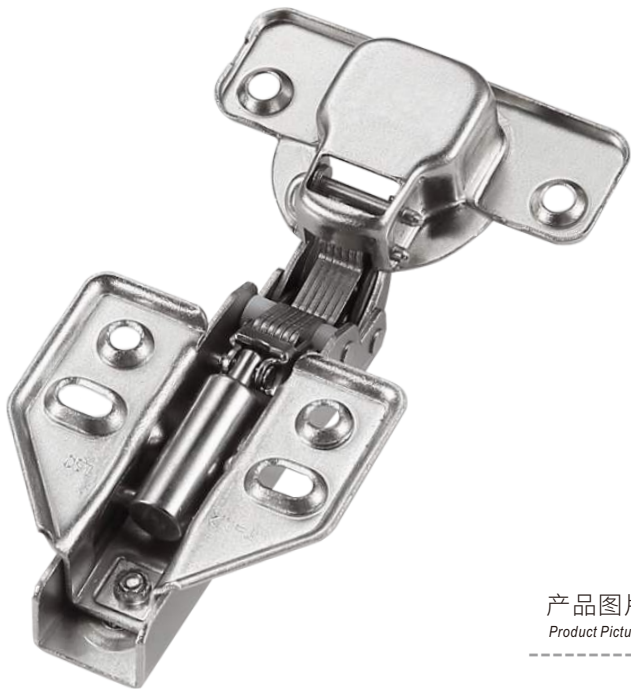


产品图片
Product Picture

直臂/全盖
FULL OVERLAY

产品质量:109g
PRODUCT QUALITY:



RG209

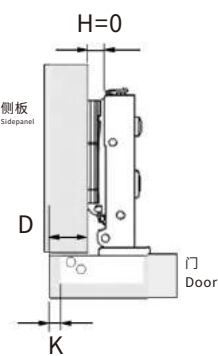

K=5 D=18mm


D \ K \ H	3	4	5	6	7
0	16	17	18	19	20
2	14	15	16	17	18
4	12	13	14	15	16

中弯/半盖
HALF OVERLAY

产品质量:110g
PRODUCT QUALITY:



RG208

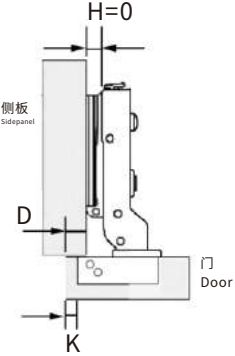

K=5 D=10mm


D \ K \ H	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

大弯/无盖
INSERT

产品质量:115g
PRODUCT QUALITY:



RG207

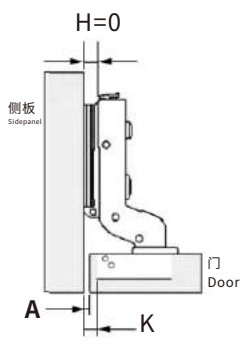

K=5 A=1mm


D \ K \ H	3	4	5	6	7
0	-3	-2	-1	0	1
2	-5	-4	-3	-2	-1
4	-7	-6	-5	-4	-3

直臂/全盖
FULL OVERLAY

产品质量:90g
PRODUCT QUALITY:



KG209

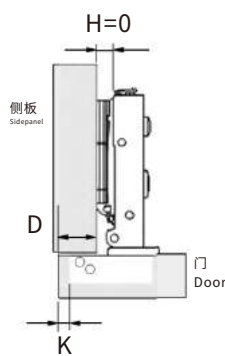

K=5 D=18mm


D \ K \ H	3	4	5	6	7
0	16	17	18	19	20
2	14	15	16	17	18
4	12	13	14	15	16

中弯/半盖
HALF OVERLAY

产品质量:95g
PRODUCT QUALITY:



KG208

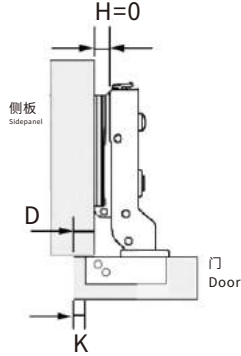

K=5 D=10mm


D \ K \ H	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

大弯/无盖
INSERT

产品质量:100g
PRODUCT QUALITY:



KG207

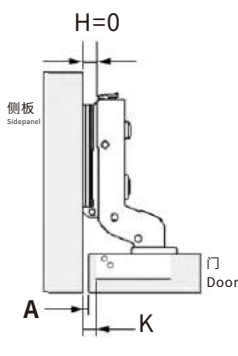

K=5 A=1mm

D \ K \ H	3	4	5	6	7
0	-3	-2	-1	0	1
2	-5	-4	-3	-2	-1
4	-7	-6	-5	-4	-3

固装缓冲铰链 KA

HYDRAULIC HINGE SERIES

材质:冷轧钢
表面处理:镀镍
开启角度:95°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.0mm
带自动缓冲闭合功能
适用门板厚度:14-20mm
Main Material:Coid-rolledsteel
Finish:Nickel Plated
Opening hinge:95°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness:1.0mm
Quickly fitting with self-closing
Door thickness:14-20mm

订购信息:
ORDERING INFORMATION



产品图片
Product Picture

快装红古铜缓冲铰链 RQ

RED BRONZE HYDRAULIC HINGE

材质:冷轧钢
表面处理:镀铜镀镍
开启角度:110°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.2mm
带自动缓冲闭合功能
适用门板厚度:14-20mm
Main Material:Coid-rolledsteel
Finish:Copper plated nickel plating
Opening hinge:110°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness: 1.2mm
Quickly fitting with self-closing
Door thickness:14-20mm

订购信息:
ORDERING INFORMATION




产品图片
Product Picture

直臂/全盖
FULL OVERLAY

产品质量:87g
PRODUCT QUALITY:



KA209

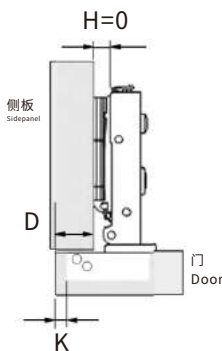

K=5 D=18mm


D \ K \ H	3	4	5	6	7
0	16	17	18	19	20
2	14	15	16	17	18
4	12	13	14	15	16

中弯/半盖
HALF OVERLAY

产品质量:86g
PRODUCT QUALITY:



KA208

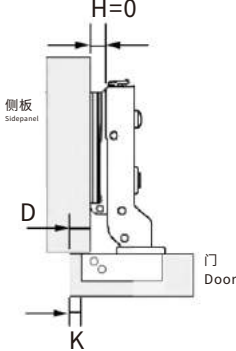

K=5 D=10mm


D \ K \ H	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

大弯/无盖
INSERT

产品质量:90g
PRODUCT QUALITY:



KA207

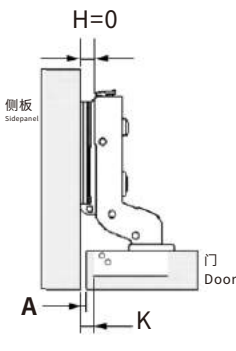

K=5 A=1mm


D \ K \ H	3	4	5	6	7
0	-3	-2	-1	0	1
2	-5	-4	-3	-2	-1
4	-7	-6	-5	-4	-3

直臂/全盖
FULL OVERLAY

产品质量:105g
PRODUCT QUALITY:



RQ209

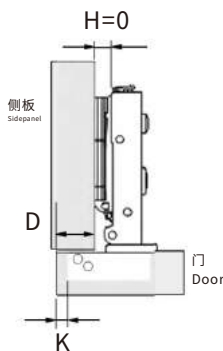

K=5 D=18mm


D \ K \ H	3	4	5	6	7
0	16	17	18	19	20
2	14	15	16	17	18
4	12	13	14	15	16

中弯/半盖
HALF OVERLAY

产品质量:110g
PRODUCT QUALITY:



RQ208

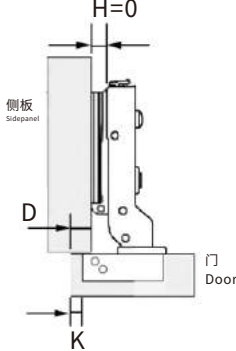

K=5 D=10mm


D \ K \ H	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

大弯/无盖
INSERT

产品质量:115g
PRODUCT QUALITY:



RQ207

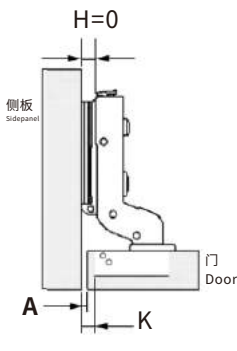

K=5 A=1mm

D \ K \ H	3	4	5	6	7
0	-3	-2	-1	0	1
2	-5	-4	-3	-2	-1
4	-7	-6	-5	-4	-3

快装青古铜缓冲铰链 RE

RED BRONZE HYDRAULIC HINGE

- 材质:冷轧钢
- 表面处理:镀铜镀镍
- 开启角度:110°
- 铰杯直径:35mm
- 铰杯深度:11.3mm
- 产品厚度:1.2mm
- 带自动缓冲闭合功能
- 适用门板厚度:14-20mm
- Main Material:Coid-rolledsteel
- Finish:Copper plated nickel plating
- Opening hinge:110°
- Dia.of hinge cup:35mm
- Depth of hinge cup:11.3mm
- Product thickness: 1.2mm
- Quickly fitting with self-closing
- Door thickness:14-20mm

订购信息:
ORDERING INFORMATION



产品图片
Product Picture

快装加头盖缓冲铰链 RT

HYDRAULIC HINGE SERIES

- 材质:冷轧钢
- 表面处理:镀镍
- 开启角度:110°
- 铰杯直径:35mm
- 铰杯深度:11.3mm
- 产品厚度:1.2mm
- 带自动缓冲闭合功能
- 适用门板厚度:14-20mm
- Main Material:Coid-rolledsteel
- Finish:Nickel Plated
- Opening hinge:110°
- Dia.of hinge cup:35mm
- Depth of hinge cup:11.3mm
- Product thickness: 1.2mm
- Quickly fitting with self-closing
- Door thickness:14-20mm

订购信息:
ORDERING INFORMATION




产品图片
Product Picture

直臂/全盖
FULL OVERLAY

产品质量:105g
PRODUCT QUALITY:



RE209

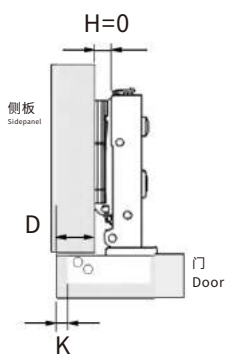

K=5 D=18mm


D \ K \ H	3	4	5	6	7
0	16	17	18	19	20
2	14	15	16	17	18
4	12	13	14	15	16

中弯/半盖
HALF OVERLAY

产品质量:110g
PRODUCT QUALITY:



RE208

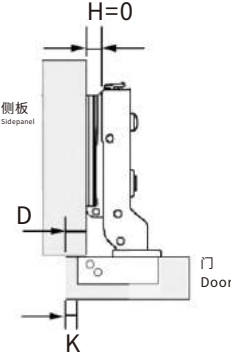

K=5 D=10mm


D \ K \ H	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

大弯/无盖
INSERT

产品质量:115g
PRODUCT QUALITY:



RE207

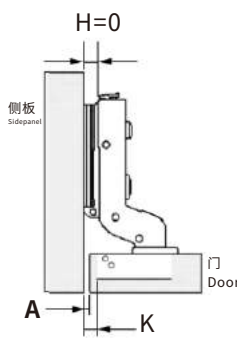

K=5 A=1mm


D \ K \ H	3	4	5	6	7
0	-3	-2	-1	0	1
2	-5	-4	-3	-2	-1
4	-7	-6	-5	-4	-3

直臂/全盖
FULL OVERLAY

产品质量:110g
PRODUCT QUALITY:



RT209

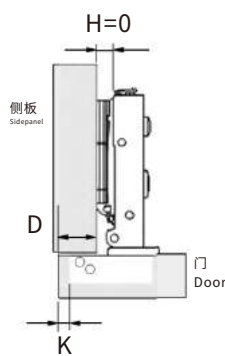

K=5 D=18mm


D \ K \ H	3	4	5	6	7
0	16	17	18	19	20
2	14	15	16	17	18
4	12	13	14	15	16

中弯/半盖
HALF OVERLAY

产品质量:115g
PRODUCT QUALITY:



RT208

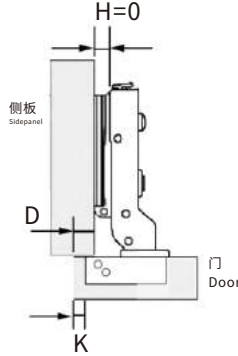

K=5 D=10mm


D \ K \ H	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

大弯/无盖
INSERT

产品质量:120g
PRODUCT QUALITY:



RT207

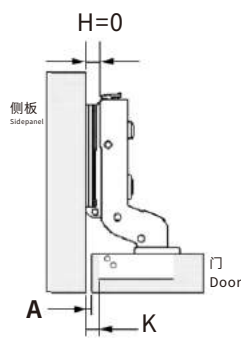

K=5 A=1mm

D \ K \ H	3	4	5	6	7
0	-3	-2	-1	0	1
2	-5	-4	-3	-2	-1
4	-7	-6	-5	-4	-3

固装加头盖缓冲铰链 KT

HYDRAULIC HINGE SERIES

- 材质:冷轧钢
- 表面处理:镀镍
- 开启角度:95°
- 铰杯直径:35mm
- 铰杯深度:11.3mm
- 产品厚度:1.2mm
- 带自动缓冲闭合功能
- 适用门板厚度:14-20mm
- Main Material:Coid-rolledsteel
- Finish:Nickel Plated
- Opening hinge:95°
- Dia.of hinge cup:35mm
- Depth of hinge cup:11.3mm
- Product thickness: 1.2mm
- Quicky fitting with self-closing
- Door thickness:14-20mm

订购信息：
ORDERING INFORMATION




产品图片
Product Picture

直臂/全盖
FULL OVERLAY

产品质量:90g
PRODUCT QUALITY:



KT209

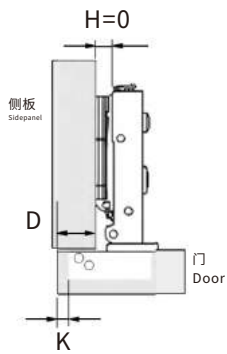

K=5 D=18mm


D \ K	3	4	5	6	7
0	16	17	18	19	20
2	14	15	16	17	18
4	12	13	14	15	16

中弯/半盖
HALF OVERLAY

产品质量:95g
PRODUCT QUALITY:



KT208

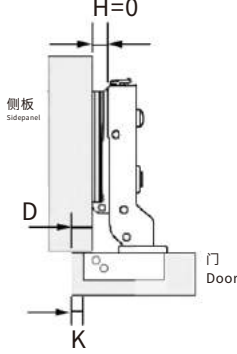

K=5 D=10mm


D \ K	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

大弯/无盖
INSERT

产品质量:100g
PRODUCT QUALITY:



KT207

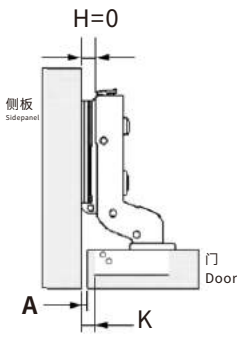

K=5 A=1mm

D \ K	3	4	5	6	7
0	-3	-2	-1	0	1
2	-5	-4	-3	-2	-1
4	-7	-6	-5	-4	-3

快装厚门40杯不锈钢缓冲铰链 UF

HYDRAULIC HINGE SERIES

- 材质:不锈钢
- 表面处理:光铬
- 开启角度:110°
- 铰杯直径:40mm
- 铰杯深度:13mm
- 产品厚度:1.2mm
- 带自动缓冲闭合功能
- 适用门板厚度:20-30mm
- Main Material:Stainless steel
- Finish:CP
- Opening hinge:110°
- Dia.of hinge cup:40mm
- Depth of hinge cup:13mm
- Product thickness: 1.2mm
- Quicky fitting with self-closing
- Door thickness:20-30mm

订购信息：
ORDERING INFORMATION




产品图片
Product Picture

直臂/全盖
FULL OVERLAY

产品质量:100g
PRODUCT QUALITY:



UF209

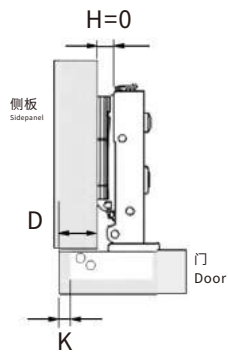


K=5 D=25mm


D \ K	3	4	5	6	7		11
0	23	24	25	26	27		31
2	21	22	23	24	25		29
4	19	20	21	22	23		27

中弯/半盖
HALF OVERLAY

产品质量:105g
PRODUCT QUALITY:

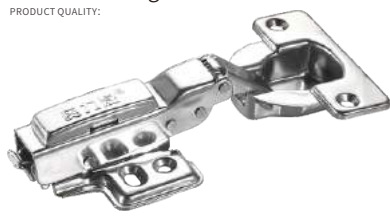

UF208

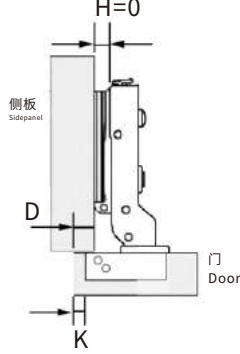

K=5 D=15mm


D \ K	3	4	5	6	7		11
0	13	14	15	16	17		21
2	11	12	13	14	15		19
4	9	10	11	12	13		17

大弯/无盖
INSERT

产品质量:110g
PRODUCT QUALITY:



UF207

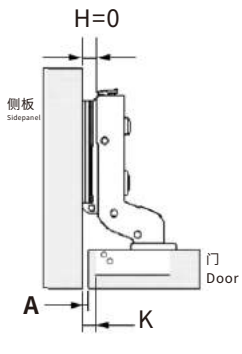

K=5 A=1mm

D \ K	3	4	5	6	7		11
0	-3	-2	-1	0	1		5
2	-5	-4	-3	-2	-1		3
4	-7	-6	-5	-4	-3		1

固装厚门40杯缓冲铰链 KF

HYDRAULIC HINGE SERIES

- 材质:冷轧钢
- 表面处理:镀镍
- 开启角度:95°
- 铰杯直径:40mm
- 铰杯深度:13mm
- 产品厚度:1.2mm
- 带自动缓冲闭合功能
- 适用门板厚度:20-30mm
- Main Material:Coid-rolledsteel
- Finish:Nickel Plated
- Opening hinge:95°
- Dia.of hinge cup:40mm
- Depth of hinge cup:13mm
- Product thickness: 1.2mm
- Quicky fitting with self-closing
- Door thickness:20-30mm

订购信息:
ORDERING INFORMATION




产品图片
Product Picture

短臂厚门40杯缓冲铰链 TF

HYDRAULIC HINGE SERIES

- 材质:冷轧钢
- 表面处理:镀镍
- 开启角度:95°
- 铰杯直径:40mm
- 铰杯深度:13mm
- 产品厚度:1.2mm
- 带自动缓冲闭合功能
- 适用门板厚度:14-22mm
- Main Material:Coid-rolledsteel
- Finish:Nickel Plated
- Opening hinge:95°
- Dia.of hinge cup:40mm
- Depth of hinge cup:13mm
- Product thickness: 1.2mm
- Quicky fitting with self-closing
- Door thickness:14-22mm

订购信息:
ORDERING INFORMATION

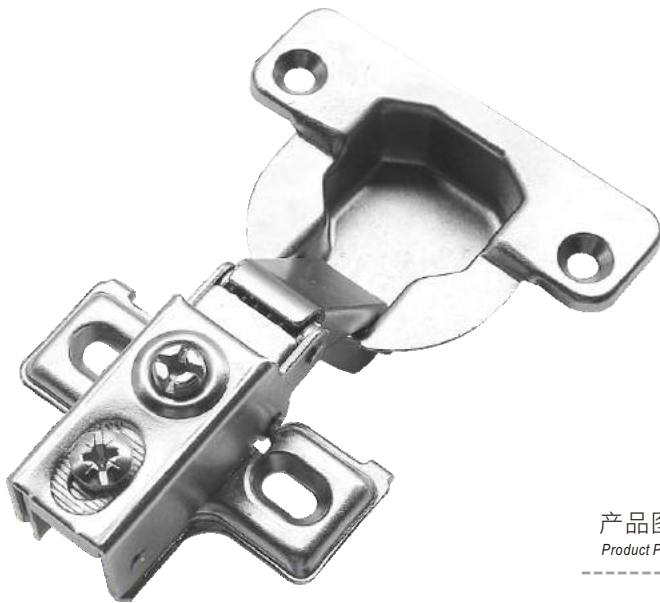


产品图片
Product Picture

直臂/全盖
FULL OVERLAY

产品质量:90g
PRODUCT QUALITY:



KF209

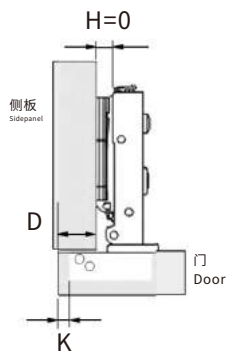


K=5 D=25mm

中弯/半盖
HALF OVERLAY

产品质量:95g
PRODUCT QUALITY:



KF208

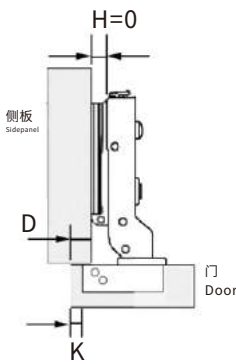


K=5 D=15mm

大弯/无盖
INSERT

产品质量:100g
PRODUCT QUALITY:



KF207

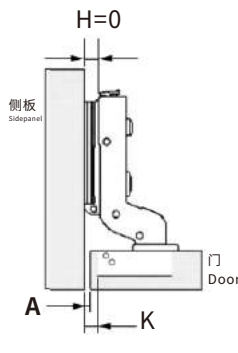

K=5 A=1mm

D \ H \ K	3	4	5	6	7		11
0	23	24	25	26	27		31
2	21	22	23	24	25		29
4	19	20	21	22	23		27

D \ H \ K	3	4	5	6	7		11
0	13	14	15	16	17		21
2	11	12	13	14	15		19
4	9	10	11	12	13		17


D \ H \ K	3	4	5	6	7		11
0	-3	-2	-1	0	1		5
2	-5	-4	-3	-2	-1		3
4	-7	-6	-5	-4	-3		1

直臂/全盖
FULL OVERLAY

产品质量:85g
PRODUCT QUALITY:



TF209

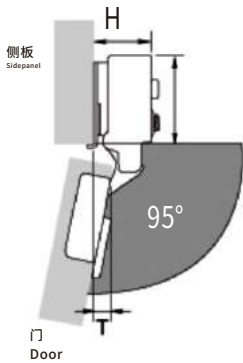


中弯/半盖
HALF OVERLAY

产品质量:93g
PRODUCT QUALITY:



TF208



D=20+K

大弯/无盖
INSERT

产品质量:101g
PRODUCT QUALITY:



TF207

D \ H \ K	3	4	5	6	7		12
0	23	24	25	26	27		32

短臂普通铰链 TK

HINGE SERIES

材质:冷轧钢
表面处理:镀镍
开启角度:110°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.2mm
适用门板厚度:14-22mm

Main Material:Coid-rolledsteel
Finish:Nickel Plated
Opening hinge:110°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness: 1.2mm
Door thickness:14-22mm



产品图片
Product Picture

订购信息：

ORDERING INFORMATION

直臂/全盖
FULL OVERLAY

产品质量:84.4g
PRODUCT QUALITY:



TK209

中弯/半盖
HALF OVERLAY

产品质量:92.4g
PRODUCT QUALITY:





TK208

大弯/无盖
INSERT

产品质量:100.4g
PRODUCT QUALITY:



TK207

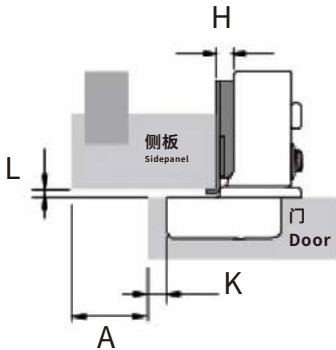

负角度铰链 NJ系列

NEGATIVE ANGLE HINGE SERIES

材质:冷轧钢
表面处理:镀镍
开启角度:95°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.2mm
适用门板厚度:14-20mm

Main Material:Coid-rolledsteel
Finish:Nickel Plated
Opening hinge:95°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness: 1.2mm
Door thickness:14-20mm



产品图片
Product Picture

订购信息：

ORDERING INFORMATION

特殊负角度

产品质量:75g
PRODUCT QUALITY:



NJ-30°

特殊负角度

产品质量:80g
PRODUCT QUALITY:






NJ-45°

特殊角度

产品质量:90g
PRODUCT QUALITY:



NJ135°

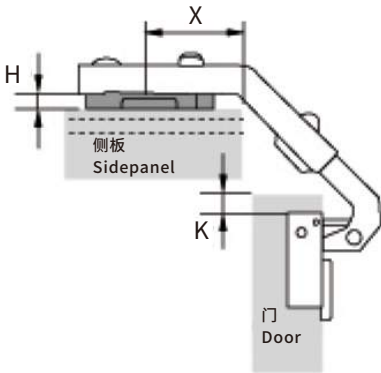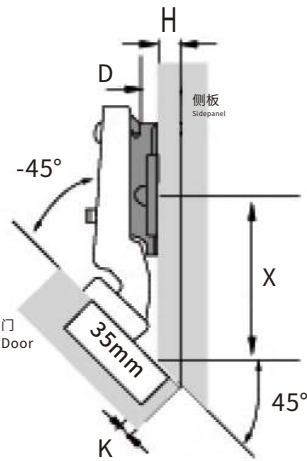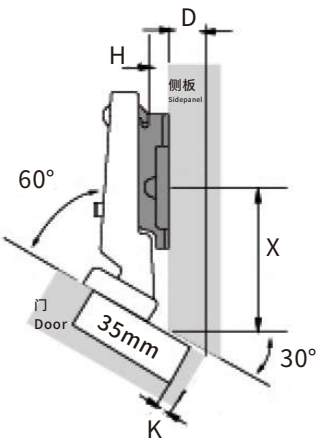

H \ K	3	4	5	6	7
2.5	42.8 8.3	42.8 8.98	42.8 9.65	42.8 10.32	42.8 10.99
4.5	45 6.3	45 6.98	45 7.65	45 8.32	45 8.99
6.5	47.2 4.3	47.2 4.98	47.2 5.65	47.2 6.32	47.2 6.99
X		D			

H \ K	3	4	5	6	7
2.5	42.8 8.3	42.8 8.98	42.8 9.65	42.8 10.32	42.8 10.99
4.5	45 6.3	45 6.98	45 7.65	45 8.32	45 8.99
6.5	47.2 4.3	47.2 4.98	47.2 5.65	47.2 6.32	47.2 6.99
X		D			

	门板厚<18mm Door thickness	22mm>门板厚度>18mm Door thickness
H	0	0
X	37	37

特殊角度缓冲铰链 NW系列

HYDRAULIC HINGE SERIES

材质:冷轧钢
表面处理:镀镍
开启角度:+25°、+30°、+45°、+90°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.2mm
带自动缓冲闭合功能
适用门板厚度:14-20mm
Main Material:Coid-rolledsteel
Finish:Nickel Plated
Opening hinge:+25°、+30°、+45°、+90°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness: 1.2mm
Quicky fitting with self-closing
Door thickness:14-20mm



产品图片
Product Picture

订购信息:
ORDERING INFORMATION

快装175度缓冲铰链 NV

HYDRAULIC HINGE SERIES

材质:冷轧钢
表面处理:镀镍
开启角度:175°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.5mm
带自动缓冲闭合功能
适用门板厚度:14-20mm
Main Material:Coid-rolledsteel
Finish:Nickel Plated
Opening hinge:175°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness: 1.5mm
Quicky fitting with self-closing
Door thickness:14-20mm



产品图片
Product Picture

订购信息:
ORDERING INFORMATION

特殊角度
产品质量:115g
PRODUCT QUALITY:



NW+25°

特殊角度
产品质量:115g
PRODUCT QUALITY:



NW+30°

特殊角度
产品质量:95g
PRODUCT QUALITY:



NW+45°

特殊角度
产品质量:95g
PRODUCT QUALITY:



NW+90°

直臂/全盖
FULL OVERLAY
产品质量:185g
PRODUCT QUALITY:



NV209

中弯/半盖
HALF OVERLAY
产品质量:190g
PRODUCT QUALITY:





NV208

大弯/无盖
INSERT
产品质量:195g
PRODUCT QUALITY:




NV207


H=安装底座高度 D=侧板上所需盖位 K=门板外线与铰链杯钻孔距离 A=门御侧板的间隙

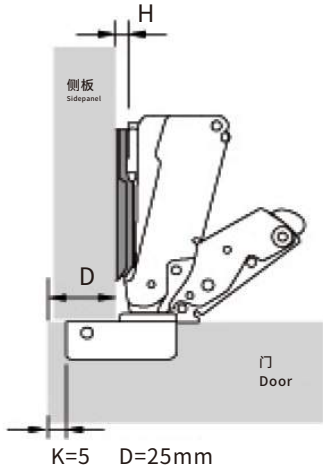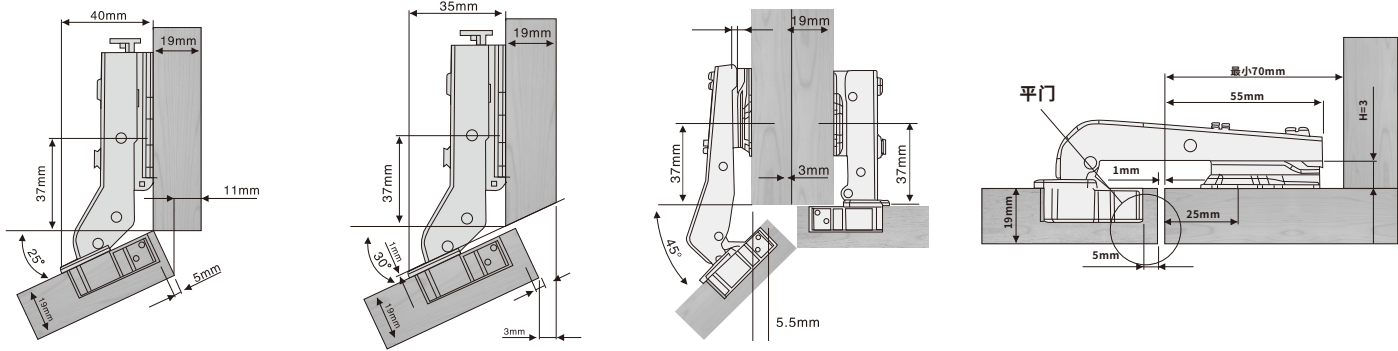

D \ H \ K	3	4	5	6	7
0	16	17	18	19	20
3	13	14	15	16	17
6	10	11	12	13	14

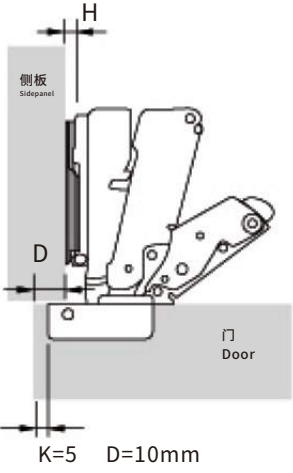

D \ H \ K	3	4	5	6	7
0	8	9	10	11	12
3	5	6	7	8	9
6	2	3	4	5	6

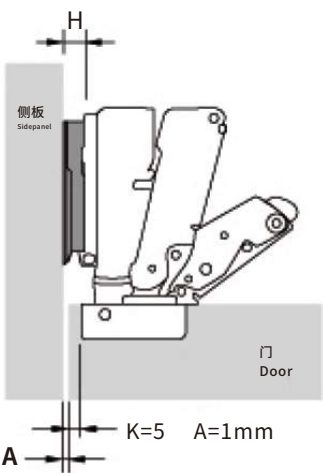

D \ H \ K	3	4	5	6	7
0	-3	-2	-1	0	1

固装175度普通铰链 NU

HINGE SERIES

材质:冷轧钢
表面处理:镀镍
开启角度:175°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.5mm
适用门板厚度:14-20mm

Main Material:Coid-rolledsteel
Finish:Nickel Plated
Opening hinge:175°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness: 1.5mm
Door thickness:14-20mm



产品图片
Product Picture

订购信息:

ORDERING INFORMATION

快装三维不锈钢铰链 WD

HYDRAULIC HINGE SERIES

材质:不锈钢
表面处理:光铬
开启角度:110°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.2mm
带自动缓冲闭合功能
适用门板厚度:14-20mm
Main Material:Stainless steel
Finish:CP
Opening hinge:110°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness: 1.2mm
Quicky fitting with self-closing
Door thickness:14-20mm



产品图片
Product Picture

订购信息:


ORDERING INFORMATION

直臂/全盖
FULL OVERLAY

产品质量:130g
PRODUCT QUALITY:



NU209

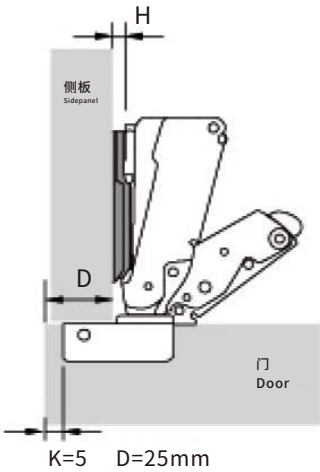


D \ H \ K	3	4	5	6	7
0	16	17	18	19	20
3	13	14	15	16	17
6	10	11	12	13	14

中弯/半盖
HALF OVERLAY

产品质量:135g
PRODUCT QUALITY:



NU208

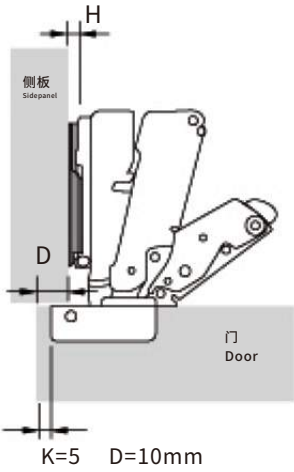


D \ H \ K	3	4	5	6	7
0	8	9	10	11	12
3	5	6	7	8	9
6	2	3	4	5	6

大弯/无盖
INSERT

产品质量:140g
PRODUCT QUALITY:




NU207

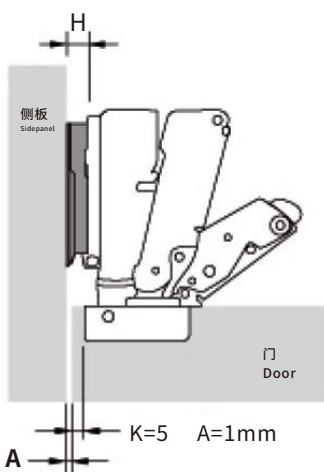


D \ H \ K	3	4	5	6	7
0	-3	-2	-1	0	1
3					
6					

直臂/全盖
FULL OVERLAY

产品质量:100g
PRODUCT QUALITY:

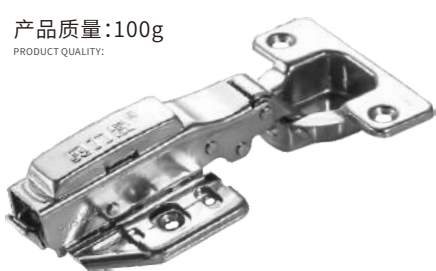

WD209

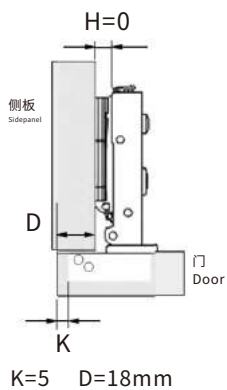


D \ H \ K	3	4	5	6	7
0	16	17	18	19	20
2	14	15	16	17	18
4	12	13	14	15	16

中弯/半盖
HALF OVERLAY

产品质量:105g
PRODUCT QUALITY:



WD208

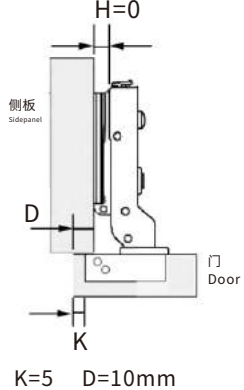


D \ H \ K	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8

大弯/无盖
INSERT

产品质量:110g
PRODUCT QUALITY:



WD207

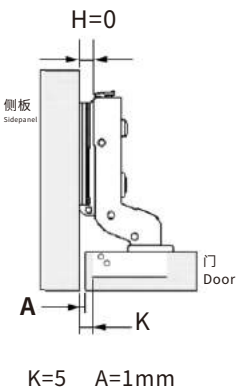

D \ H \ K	3	4	5	6	7
0	-3	-2	-1	0	1
2	-5	-4	-3	-2	-1
4	-7	-6	-5	-4	-3

铝框门缓冲铰链 KV
HYDRAULIC HINGE SERIES

材质:冷轧钢
表面处理:镀镍
开启角度:95°
铰杯直径:35m
产品厚度:1.2mm
带自动缓冲闭合功能
适用门板厚度:14-20mm

Main Material:Coid-rolledsteel
Finish:Nickel Plated
Opening hinge:95°
Dia.of hinge cup:35mm
Product thickness: 1.2mm
Quicky fitting with self-closing
Door thickness:14-20mm



产品图片
Product Picture

订购信息:
ORDERING INFORMATION

26杯液压铰链 CK
HYDRAULIC HINGE SERIES

材质:冷轧钢
表面处理:镀镍
开启角度:95°
铰杯直径:26mm
铰杯深度:9.5mm
产品厚度:1.0mm
带自动缓冲闭合功能
适用门板厚度:12-18mm
Main Material:Coid-rolledsteel
Finish:Nickel Plated
Opening hinge:95°
Dia.of hinge cup:26mm
Depth of hinge cup:9.5mm
Product thickness: 1.0mm
Quicky fitting with self-closing
Door thickness:12-18mm



产品图片
Product Picture

订购信息:
ORDERING INFORMATION

直臂/全盖
FULL OVERLAY

产品质量:80g
PRODUCT QUALITY:



KV209

中弯/半盖
HALF OVERLAY

产品质量:85g
PRODUCT QUALITY:



KV208

大弯/无盖
INSERT

产品质量:90g
PRODUCT QUALITY:



KV207

直臂/全盖
FULL OVERLAY

产品质量:50g
PRODUCT QUALITY:



CK209

中弯/半盖
HALF OVERLAY

产品质量:50g
PRODUCT QUALITY:




CK208

大弯/无盖
INSERT


产品质量:55g
PRODUCT QUALITY:




CK207

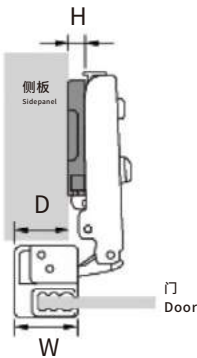


D	W	19	20	21	22	23
H						
0		16	17	18	19	20
2		14	15	16	17	18
4		12	13	14	15	16

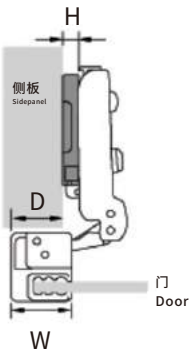


D	W	19	20	21	22	23
H						
0		8	9	10	11	12
2		6	7	8	9	10
4		4	5	6	7	8




D	W	19	20	21	22	23
H						
0		-3	-2	-1	0	1
2		-5	-4	-3	-2	-1
4		-7	-6	-5	-4	-3

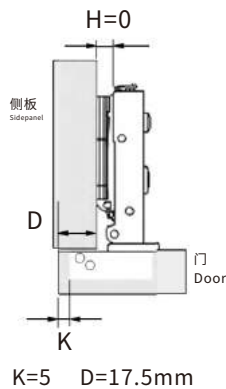

D	K	3	4	5		
H						
1.5		15.5	16.5	17.5		
3		14	15	16		
4.5		12.5	13.5	14.5		

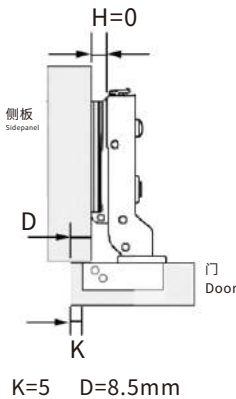

D	K	3	4	5		
H						
1.5		6.5	7.5	8.5		
3		5	6	7		
4.5		3.5	4.5	5.5		

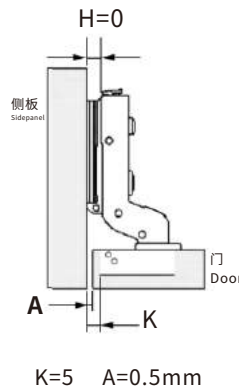

D	K	3	4	5		
H						
1.5		-1.5	-0.5	0.5		
3		-3	-2	-1		
4.5		-4.5	-3.5	-2.5		

26杯玻璃门铰链 CH

HYDRAULIC HINGE SERIES

材质:冷轧钢
表面处理:镀镍
开启角度:95°
铰杯直径:26mm
铰杯深度:9.5mm
产品厚度:1.0mm
带自动缓冲闭合功能
适用门板厚度:12-18mm
Main Material:Coid-rolledsteel
Finish:Nickel Plated
Opening hinge:95°
Dia.of hinge cup:26mm
Depth of hinge cup:9.5mm
Product thickness: 1.0mm
Quicky fitting with self-closing
Door thickness:12-18mm

订购信息:
ORDERING INFORMATION



产品图片
Product Picture

玻璃门缓冲铰链 KH

HYDRAULIC HINGE SERIES

材质:冷轧钢
表面处理:镀镍
开启角度:95°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.2mm
带自动缓冲闭合功能
适用门板厚度:14-20mm
Main Material:Coid-rolledsteel
Finish:Nickel Plated
Opening hinge:95°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness: 1.2mm
Quicky fitting with self-closing
Door thickness:14-20mm

订购信息:
ORDERING INFORMATION



产品图片
Product Picture

直臂/全盖
FULL OVERLAY

产品质量:100g
PRODUCT QUALITY:



CH209

中弯/半盖
HALF OVERLAY

产品质量:100g
PRODUCT QUALITY:



CH208

大弯/无盖
INSERT

产品质量:100g
PRODUCT QUALITY:



CH207

直臂/全盖
FULL OVERLAY

产品质量:95g
PRODUCT QUALITY:



KH209

中弯/半盖
HALF OVERLAY

产品质量:100g
PRODUCT QUALITY:






KH208

大弯/无盖
INSERT

产品质量:105g
PRODUCT QUALITY:




KH207

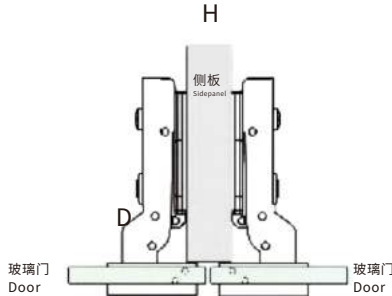


D \ H \ K	3	4	5		
0	14	15	16		
3	11	12	13		

D \ H \ K	3	4	5		
0	5.5	6.5	7.5		
3	2.5	3.5	4.5		


D \ H \ K	3	4	5		
0	-2.5	-1.5	-0.5		

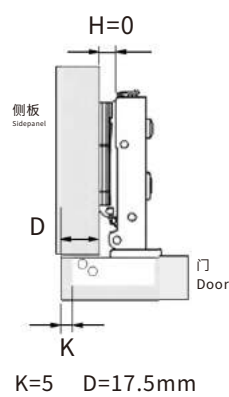

D \ H \ K	3	4	5		
1.5	15.5	16.5	17.5		
3	14	15	16		
4.5	12.5	13.5	14.5		

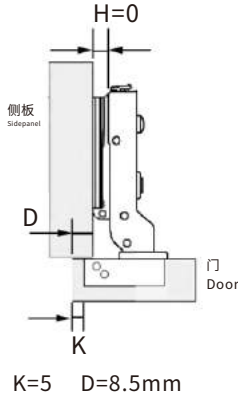

D \ H \ K	3	4	5		
1.5	6.5	7.5	8.5		
3	5	6	7		
4.5	3.5	4.5	5.5		

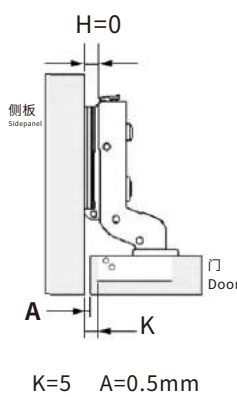

D \ H \ K	3	4	5		
1.5	-1.5	-0.5	0.5		
3	-3	-2	-1		
4.5	-4.5	-3.5	-2.5		

免开孔铰链系列 QA/QB/QC/QN

HINGE SERIES

材质:冷轧钢
表面处理:镀镍
开启角度:95°
产品厚度:1.2/1.5/1.5/2.0mm
适用门板厚度:14-20mm

Main Material:Coid-rolledsteel
Finish:Nickel Plated
Opening hinge:95°
Product thickness: 1.2/1.5/1.5/2.0mm
Door thickness:14-20mm



产品图片
Product Picture

订购信息:
ORDERING INFORMATION

普通款 3寸

产品质量:50g
PRODUCT QUALITY:



QA

普通款 4寸

产品质量:70g
PRODUCT QUALITY:



QB

阻尼款 4寸

产品质量:100g
PRODUCT QUALITY:



QC




可调165大角度

适用16-40MM门板



产品质量:250g
PRODUCT QUALITY:

QN

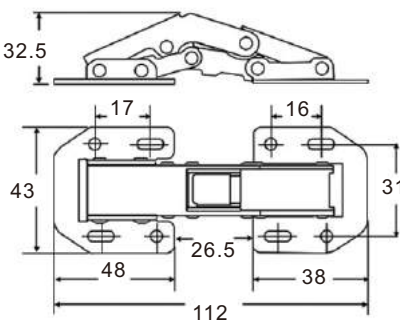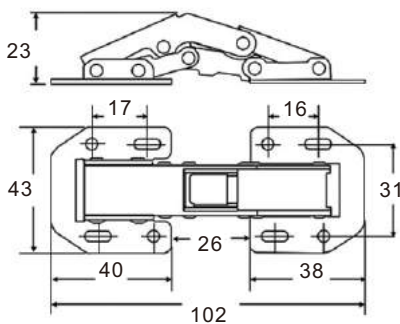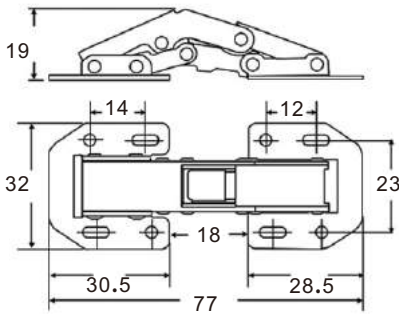

铜色铝框门缓冲铰链 KV

HYDRAULIC HINGE SERIES

材质:冷轧钢
表面处理:镀镍
开启角度:95°
铰杯直径:35m
产品厚度:1.2mm
带自动缓冲闭合功能
适用门板厚度:14-20mm

Main Material:Coid-rolledsteel
Finish:Nickel Plated
Opening hinge:95°
Dia.of hinge cup:35mm
Product thickness: 1.2mm
Quicky fitting with self-closing
Door thickness:14-20mm



产品图片
Product Picture

订购信息:
ORDERING INFORMATION

直臂/全盖

FULL OVERLAY

产品质量:79.2g
PRODUCT QUALITY:



KV209

中弯/半盖

HALF OVERLAY

产品质量:80.9g
PRODUCT QUALITY:



KV208


大弯/无盖

INSERT


产品质量:84.6g
PRODUCT QUALITY:




KV207

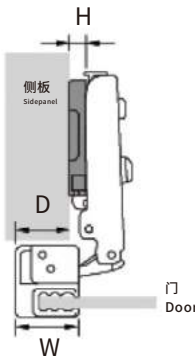

D \ H \ W	19	20	21	22	23
0	16	17	18	19	20
2	14	15	16	17	18
4	12	13	14	15	16

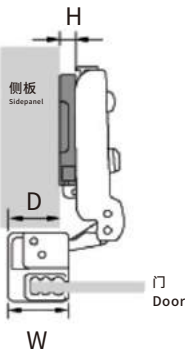

D \ H \ W	19	20	21	22	23
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8



D \ H \ W	19	20	21	22	23
0	-3	-2	-1	0	1
2	-5	-4	-3	-2	-1
4	-7	-6	-5	-4	-3

铜色175度缓冲铰链 NV

HYDRAULIC HINGE SERIES

- 材质:冷轧钢
- 表面处理:镀镍
- 开启角度:175°
- 铰杯直径:35mm
- 铰杯深度:11.3mm
- 产品厚度:1.5mm
- 带自动缓冲闭合功能
- 适用门板厚度:14-20mm
- Main Material:Coid-rolledsteel
- Finish:Nickel Plated
- Opening hinge:175°
- Dia.of hinge cup:35mm
- Depth of hinge cup:11.3mm
- Product thickness: 1.5mm
- Quicky fitting with self-closing
- Door thickness:14-20mm

订购信息:

 ORDERING INFORMATION



产品图片

 Product Picture

铜色缓冲铰链 KG

HYDRAULIC HINGE SERIES

- 材质:冷轧钢
- 表面处理:镀镍
- 开启角度:95°
- 铰杯直径:35mm
- 铰杯深度:11.3mm
- 产品厚度:1.0mm
- 带自动缓冲闭合功能
- 适用门板厚度:14-20mm
- Main Material:Coid-rolledsteel
- Finish:Nickel Plated
- Opening hinge:95°
- Dia.of hinge cup:35mm
- Depth of hinge cup:11.3mm
- Product thickness: 1.0mm
- Quicky fitting with self-closing
- Door thickness:14-20mm

订购信息:

 ORDERING INFORMATION



产品图片

 Product Picture




直臂/全盖

 FULL OVERLAY

产品质量:166.5g

 PRODUCT QUALITY:

NV209

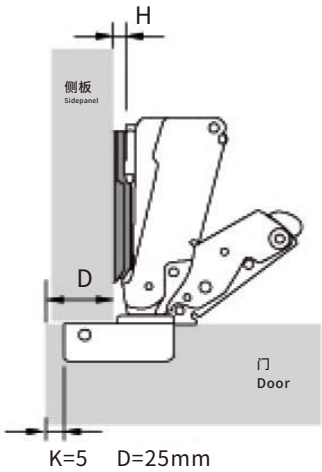

D \ H \ K	3	4	5	6	7
0	16	17	18	19	20
3	13	14	15	16	17
6	10	11	12	13	14




中弯/半盖

 HALF OVERLAY

产品质量:175.8g

 PRODUCT QUALITY:

NV208

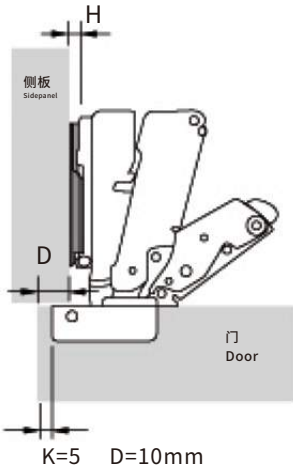

D \ H \ K	3	4	5	6	7
0	8	9	10	11	12
3	5	6	7	8	9
6	2	3	4	5	6




大弯/无盖

 INSERT

产品质量:185.7g

 PRODUCT QUALITY:

NV207

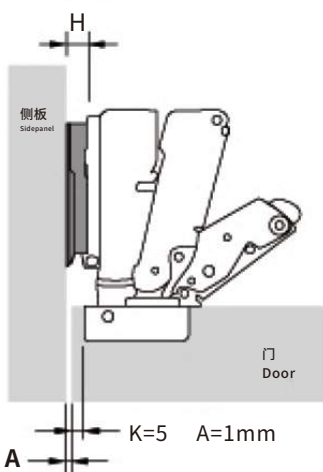

D \ H \ K	3	4	5	6	7
0	-3	-2	-1	0	1




直臂/全盖

 FULL OVERLAY

产品质量:87g

 PRODUCT QUALITY:

KG209

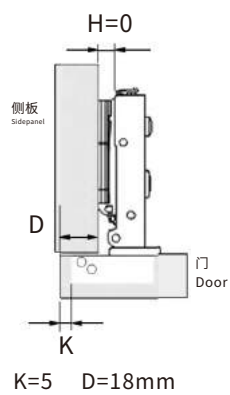

D \ H \ K	3	4	5	6	7
0	16	17	18	19	20
2	14	15	16	17	18
4	12	13	14	15	16




中弯/半盖

 HALF OVERLAY

产品质量:86g

 PRODUCT QUALITY:

KG208

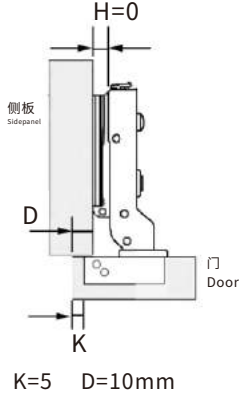

D \ H \ K	3	4	5	6	7
0	8	9	10	11	12
2	6	7	8	9	10
4	4	5	6	7	8




大弯/无盖

 INSERT

产品质量:90g

 PRODUCT QUALITY:

KG207

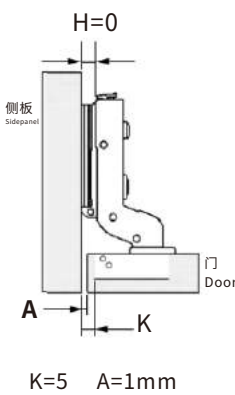

D \ H \ K	3	4	5	6	7
0	-3	-2	-1	0	1
2	-5	-4	-3	-2	-1
4	-7	-6	-5	-4	-3

三维反弹缓冲铰链 HD

HYDRAULIC HINGE SERIES

材质:冷轧钢
表面处理:镀镍
开启角度:105°
铰杯直径:35mm
铰杯深度:11.3mm
产品厚度:1.2mm
配合反弹器,具有反弹功能
适用门板厚度:14-20mm
Main Material:Coid-rolledsteel
Finish:Nickel Plated
Opening hinge:105°
Dia.of hinge cup:35mm
Depth of hinge cup:11.3mm
Product thickness: 1.2mm
Rebound function
Door thickness:14-20mm



产品图片
Product Picture

订购信息:

ORDERING INFORMATION

直臂/全盖

FULL OVERLAY

产品质量:121g
PRODUCT QUALITY:



HD209

中弯/半盖

HALF OVERLAY

产品质量:121.2g
PRODUCT QUALITY:



HD208


大弯/无盖

INSERT


产品质量:124.1g
PRODUCT QUALITY:




HD207

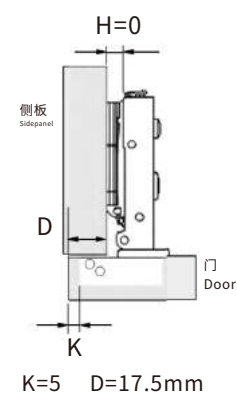

D	K	3	4	5		
H						
0		17	18	19		
3		14	15	16		
5		12	13	14		

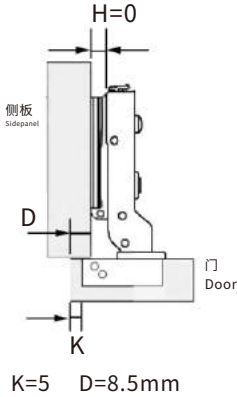

D	K	3	4	5		
H						
0		9	10	11		
3		6	7	8		
5		4	5	6		

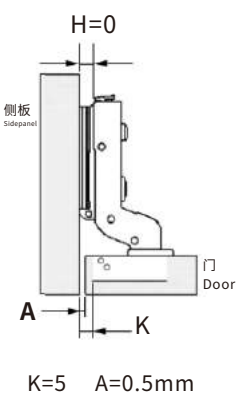

D	K	3	4	5		
H						
0		-2.5	-1.5	-0.5		

反弹器

REBOUND

机械触碰式开启
环保ABS高强度塑料材质
安装牢固稳定
需要搭配反弹铰链使用


Mechanical touch open1
High strength plastic
Foxed-on
Need to be used together




产品图片
Product Picture

订购信息:


ORDERING INFORMATION

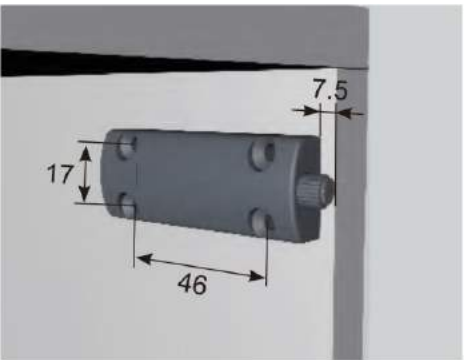


1.安装时请按下反弹器中心组件,使得磁铁边缘与侧板边缘齐平。

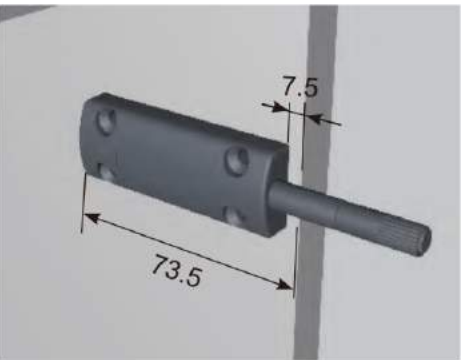


2.在标准的安装尺寸下,反弹器主体前端距离离侧板边缘7.5mm,后端距离73.5mm

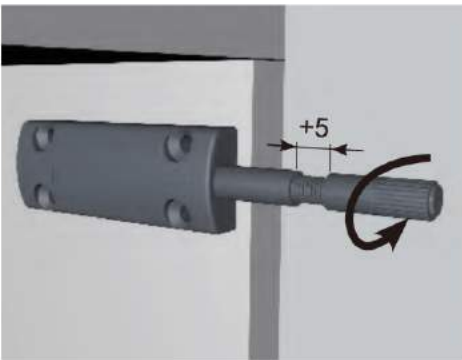

3.旋转中心组件可增加5mm调节量,以修正反弹器定位偏差。

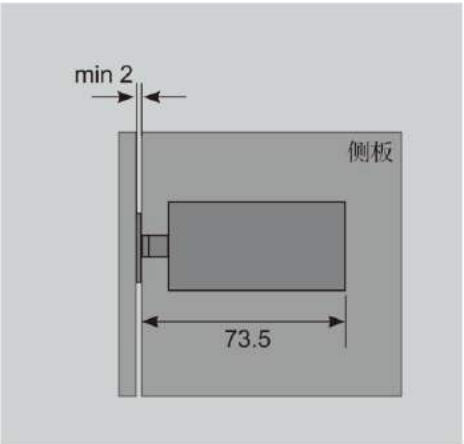

4.安装金属吸附片所需最小门缝为2mm可旋转反弹器中心组件微调。

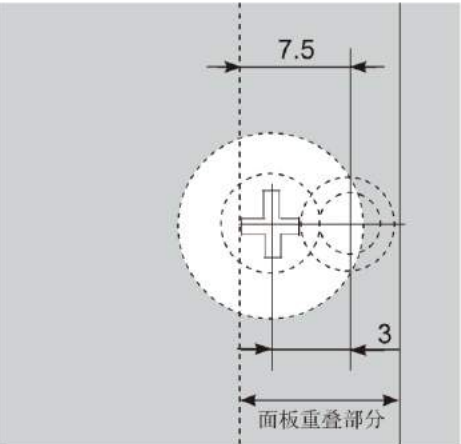

5.使反弹器磁铁中心相对金属吸附片中心偏移3mm, 以获取最佳效果。

卡式木门缓冲铰链 BN

HYDRAULIC HINGE SERIES

- 材质:冷轧钢
- 表面处理:镀镍
- 开启角度:125°
- 铰杯直径:35mm
- 铰杯深度:9.7mm
- 产品厚度:1.2mm
- 带自动缓冲闭合功能
- 适用门板厚度:14-20mm
- Main Material:Coid-rolledsteel
- Finish:Nickel Plated
- Opening hinge:125°
- Dia.of hinge cup:35mm
- Depth of hinge cup:9.7mm
- Product thickness: 1.2mm
- Quicky fitting with self-closing
- Door thickness:14-20mm




产品图片
Product Picture

订购信息:
ORDERING INFORMATION

特殊125度铰链
SPECIAL HINGE
产品质量:105g
PRODUCT QUALITY:



BN

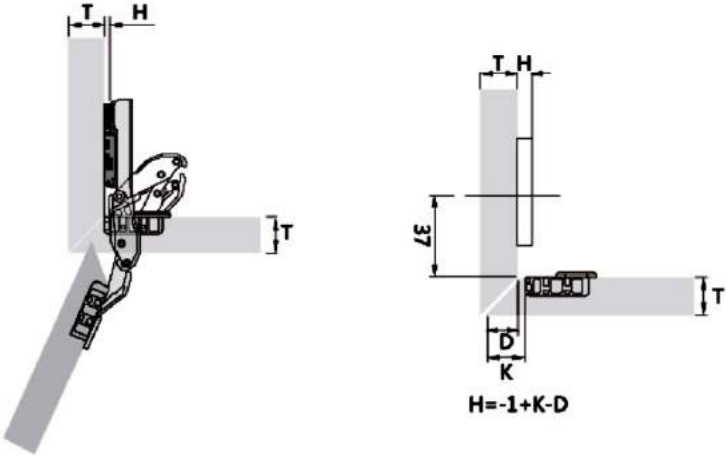

D \ H \ K	14	15	16	17	18	19	20	21	22
0	13	14	15	16	17	18	19	20	21
2	11	12	13	14	15	16	17	18	19
4	9	10	11	12	13	14	15	16	17

卡式玻璃门缓冲铰链 BH

HYDRAULIC HINGE SERIES

- 材质:冷轧钢
- 表面处理:镀镍
- 开启角度:125°
- 产品厚度:1.2mm
- 带自动缓冲闭合功能
- 适用门板厚度:14-20mm
- Main Material:Coid-rolledsteel
- Finish:Nickel Plated
- Opening hinge:125°
- Product thickness: 1.2mm
- Quicky fitting with self-closing
- Door thickness:14-20mm




产品图片
Product Picture

订购信息:
ORDERING INFORMATION

特殊125度铰链
SPECIAL HINGE
产品质量:105g
PRODUCT QUALITY:



BH

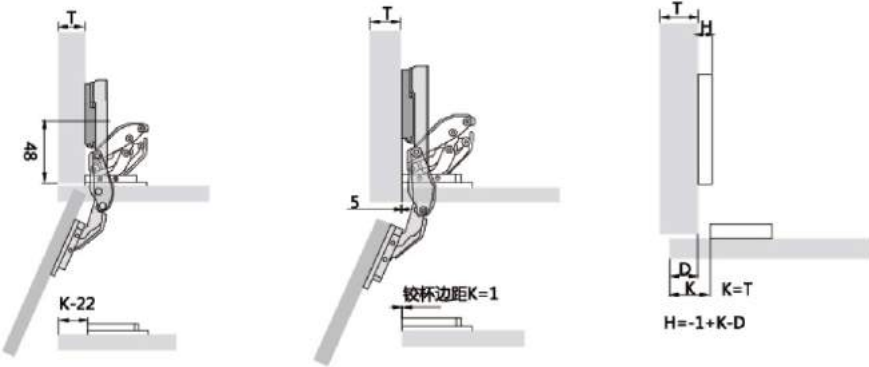

D \ H \ K	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22
0	-1	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21
2	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
4	-5	-4	-3	-2	-1	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17