

奥力晟
AOLISHENG

佛山奥力晟五金有限公司
FOSHAN AOLISHENG HARDWARE CO., LTD.

厂址:广东省佛山市南海区官窖镇永安大道东
传真:0757-81776059
邮箱:1154712727@qq.com



奥力晟官方网站

全国免费服务热线:
400-862-2686

本册各项产品颜色、尺寸因摄影及印刷缘故,于实物可能有所偏差,请以实物为准,如有改动,恕不另行通知。

奥力晟
AOLISHENG

重型工业滑轨领跑品牌
HEAVY INDUSTRIAL SLIDE LEADING BRAND



专注成就专业
滑轨·铰链

奥力晟[国际]五金

专 注 成 就 专 业
滑 轨 · 铰 链

奥力晟
AOLISHENG

重型工业滑轨领跑品牌

Heavy Industrial Slide Leading Brand



佛山奥力晟五金有限公司是一家专业生产奥力晟AOLISHENG品牌滑轨和铰链的集研发、生产、销售于一体的制造型企业。本厂自2003年以来坚持中高端人群定位。

我们一直坚持倡导:将以负责任的态度面对客户,坚持以首先考虑和维护客户利益为第一原则、以努力实现客户目标来回报社会,我们深知,良好的口碑是最好的市场推广,赢得信赖是荣誉更是责任!

Foshan Aolisheng Hardware Co., Ltd. is a professional manufacturing factory spealizing in designing, producing, and selling hinges and ball bearing sliders of AOLISHENG brand. The factory insists on serving for middle and high class customers since 2003.We persisted in advocating: keep responsible attitude to customers, adhere to take customers interests as the first principle, and strive to achieve customers goals to return the society. We know well that good trust is the best market promotion, to win the trust of customers is our honor and responsibility!

企业简介

Company profile

关于滑轨:从工业级重型滑轨承重220KG的76宽自锁载重滑道、承重150KG的71宽重型轨道、120KG的53宽带锁房车导轨、68KG的51宽工具柜抽屉轨道、45宽三节钢珠橱柜滑轨、35衣柜滑轨、27宽键盘滑轨、自吸托底隐藏滑轨、三节缓冲阻尼滑轨以及豪华骑马抽屉。

关于铰链:304不锈钢阻尼缓冲铰链的研发过程中首先提出材质含量平衡,并坚持使用纯铜芯液压铰链缸体。首先研发青红古铜欧式铰链,搭配红木家具铰链。接着180度、175度、负角度等各式特殊角度铰链,更有40杯头厚门铰链、玻璃门、铝框门等飞机烟斗合页。

佛山奥力晟五金有限公司期待与您一同成长,共创双赢!

About slide rails: width 76 self-locking heavy industrial slide with bearing 220KG, width 71 heavy slide with bearing 150KG, width 53 slide with lock for house car bearing 120KG, width 51 tool case slide with bearing 68KG, width 45 three sections ball bearing cabinet slide, width 35 wardrobe slide, width 27 keyboard slide, self sucking tray hidden slide, three section damping buffering slide for deluxe rider drawers.

About hinges: Stainless steel 304 damping buffering hinge, the first to keep balance of materials in the development, insist on using pure copper core hydraulic cylinder. The first to develop bronze European style hinges matching mahogany furniture. Following with 180 degrees, 175 degrees, negative angles and other special angle hinges, 40 cup thick door hinges, glass door hinges, aluminum frame hinges and so on.

Foshan Aolisheng Hardware Co., Ltd. is looking forward to growing with you to create a win-win situation!

产品目录

CONTENT

滑轨
SLIDE

- 07- 76宽重型工业滑轨A2576
- 09- 76宽带锁重型工业滑轨D2576
- 11- 71宽重型工业滑轨A2071
- 13- 53宽重型工业滑轨A2053
- 15- 53宽带锁重型工业滑轨D2053
- 17- 53宽阻尼重型工业滑轨K2053
- 19- 51宽重型工业滑轨A1551
- 21- 51宽带锁重型工业滑轨D1551
- 25- 三节钢珠滑轨A4510
- 26- 三节加厚钢珠滑轨A4512
- 27- 三节钢珠缓冲滑轨K1245
- 28- 三节钢珠反弹滑轨F1245
- 29- 三节钢珠滑轨A1035
- 30- 两节钢珠滑轨A1027

- 31- 二节托底隐藏缓冲滑轨K216
- 32- 二节托底隐藏缓冲滑轨K230
- 33- 三节托底隐藏缓冲滑轨K330
- 34- 不锈钢三节滑轨U1045
- 35- 不锈钢加厚三节滑轨U1245
- 36- 阻尼不锈钢三节滑轨U1045K
- 37- 侧装碗碗篮拉篮滑轨H1245
- 38- 底装调味篮拉篮滑轨L1245
- 39- 侧装可调拉篮滑轨M1245
- 40- 骑马抽低邦(无杆)K9860
- 41- 骑马抽高邦(带杆)K9862
- 42- 五寸两节滑轨W3510



铰链
HINGE

- 45- 快装不锈钢缓冲铰链 WR系列
- 46- 固装不锈钢缓冲铰链 WL系列
- 47- 快装不锈钢缓冲铰链 UR系列
- 48- 固装不锈钢缓冲铰链 UL系列
- 49- 快装缓冲铰链 RG
- 50- 固装加厚缓冲铰链 KG
- 51- 固装缓冲铰链 KA
- 52- 快装红古铜缓冲铰链 RQ
- 53- 快装青古铜缓冲铰链 RE
- 54- 快装加头盖缓冲铰链 RT
- 55- 固装加头盖缓冲铰链 KT
- 56- 快装厚门40杯不锈钢缓冲铰链 UF
- 57- 固装厚门40杯缓冲铰链 KF
- 58- 短臂厚门40杯缓冲铰链 TF
- 59- 短臂普通铰链 TK
- 60- 负角度铰链NJ系列
- 61- 特殊角度缓冲铰链NW系列

- 62- 快装175度缓冲铰链 NV
- 63- 固装175度普通铰链 NU
- 64- 快装三维不锈钢铰链 WD
- 65- 铝框门缓冲铰链 KV
- 66- 26杯液压铰链 CK
- 67- 26杯玻璃门铰链 CH
- 68- 玻璃门缓冲铰链 KH
- 69- 免开孔铰链系列 QA/QB/QC/QN
- 70- 银色铝框门缓冲铰链 KV
- 71- 银色175度缓冲铰链 NV
- 72- 银色缓冲铰链 KG
- 73- 三维反弹缓冲铰链 HD
- 74- 反弹器
- 75- 卡式木门缓冲铰链 BN
- 76- 卡式玻璃门缓冲铰链 BH




家具五金
FURNITURE
HARDWARE

- 79- 锌合金家具拉手系列
- 83- 纯铜家具拉手系列
- 86- 门用合页系列
- 89- 门吸门碰系列
- 92- 吊门移门系列
- 93- 家具附件系列



家居五金
HOME
HARDWARE

- 97- 衣柜五金系列
- 103- 水槽系列
- 105- 厨房水龙头系列
- 109- 上翻气撑系列
- 112- 产品外包装图

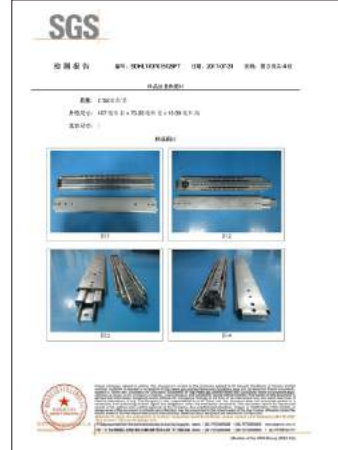



重型滑轨

重型工业专用！高强度承重力

SPECIALLY FOR HEAVY INDUSTRY! HIGH STRENGTH BEARING CAPACITY

高密度的上乘材料，封蓝电镀处理，更耐磨。
High density superior material,chrome plating treatment and more wearable.

超强的承重、高性能，广泛应用于大部分工业应用
Super load-bearing and high performance, widely used in most industrial applications.




专注成就专业
滑轨·铰链

76宽重型工业滑轨 A2576

HEAVY DUTY BALL BEARING SLIDE

材质:冷轧钢/Q235
宽度:76mm
安装厚度:19.2mm
表面处理:封蓝
承重:18"/220kg
规格长度:8"-60"
安装形式:抽屉侧面
材料厚度:2.5*2.5*2.5mm
产品质量:250g/2"

Material:cold-rolled steel /Q235
Slide width:76mm
slide thickness:19.2mm
Surface treatment:Zinc Plating
max weight:18"/220kg
length:8"-60"
The installed forms:side mount
Material thickness:2.5*2.5*2.5mm
Product quality: 250g/2"

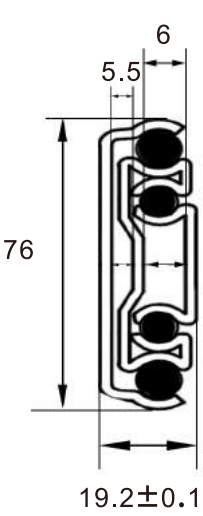

产品图片
Product Picture


适用范围 Application range

工业抽屉、货柜、房车、金融设备/改装车辆等



孔位示意图 Installation indication

图示Graphic:18"

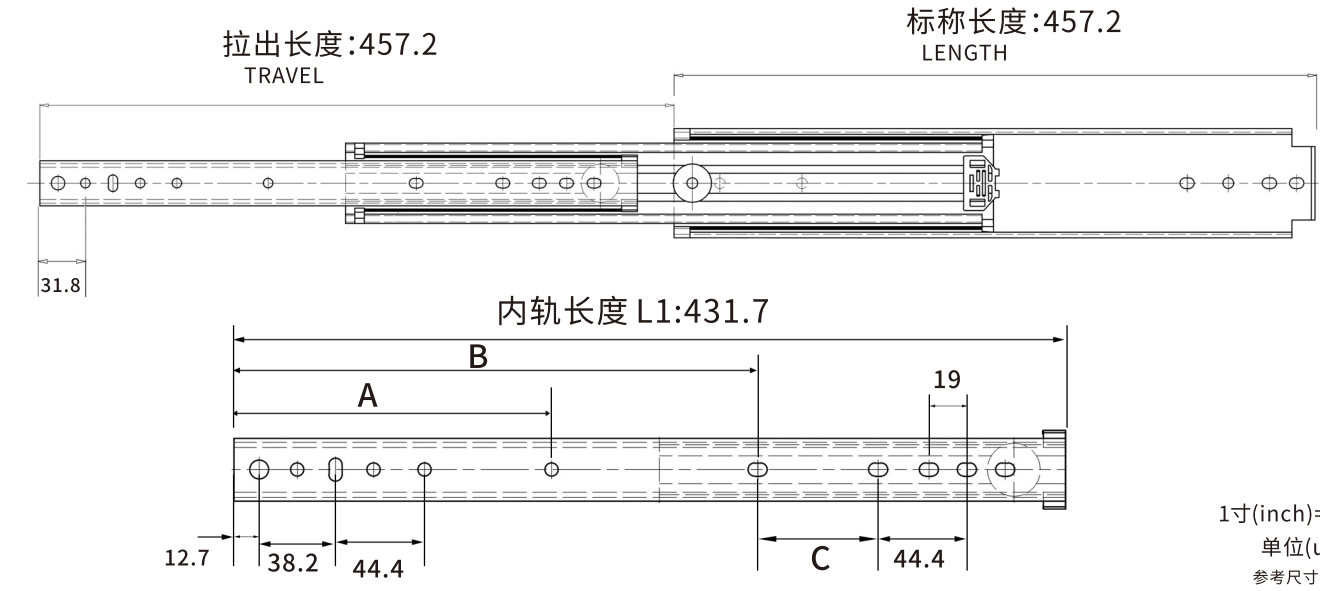

1寸(inch)=25.4mm
单位(unit):mm
参考尺寸,以实物为准


订货编号 Model	拉出长度±3 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES L1±0.5	A	B	C	套/箱 Sets/ctn
A2576-10"	254	254	228.5	134.9	-	-	4
A2576-12"	304.8	304.8	279.3	185.7	-	-	4
A2576-14"	355.6	355.6	330.1	236.5	-	-	4
A2576-16"	406.4	406.4	380.9	158.8	-	-	4
A2576-18"	457.2	457.2	431.7	158.8	277.9	60.2	4
A2576-20"	508	508	482.5	158.8	328.7	60.2	4
A2576-22"	558.8	558.8	533.3	158.8	379.5	60.2	4
A2576-24"	609.6	696	584.1	158.8	430.3	60.2	4
A2576-26"	660.4	660.4	634.9	158.8	481.1	60.2	4
A2576-28"	711.2	711.2	685.7	158.8	531.9	60.2	4
A2576-30"	762	762	736.5	158.8	582.7	60.2	2
A2576-32"	812.8	812.8	787.3	158.8	633.5	60.2	2
A2576-34"	836.6	863.6	838.1	158.8	684.3	60.2	2
A2576-36"	914.4	914.4	888.9	158.8	735.1	60.2	2
A2576-38"	965.2	965.2	939.7	158.8	785.9	60.2	2
A2576-40"	1016	1016	990.5	158.8	836.7	60.2	2
A2576-42"	1066.8	1066.8	1014.3	158.8	836.7	60.2	2
A2576-44"	1117.6	1117.2	1092.1	158.8	938.3	60.2	2
A2576-46"	1168.4	1168.4	1142.9	158.8	989.1	60.2	2
A2576-48"	1219.2	1219.2	1193.7	158.8	1039.9	60.2	2
A2576-50"	1270	1270	1244.5	158.8	1090.7	60.2	2
A2576-52"	1320.8	1320.8	1295.3	158.8	1141.5	60.2	2
A2576-54"	1371.6	1371.6	1346.1	158.8	1192.3	60.2	2
A2576-56"	1422.4	1422.4	1396.9	158.8	1243.1	60.2	2
A2576-58"	1473.2	1473.2	1447.7	158.8	1293.9	60.2	2
A2576-60"	1524	1524	1498.5	158.8	1344.7	60.2	2

76宽带锁重型工业滑轨 D2576

HEAVY DUTY BALL BEARING SLIDE

材质:冷轧钢/Q235
宽度:76mm
安装厚度:19.2mm
表面处理:封蓝
承重:18"/220kg
规格长度:12"-60"
安装形式:抽屉侧面
材料厚度:2.5*2.5*2.5mm
产品质量:250g/2"

Material:cold-rolled steel /Q235
Slide width:76mm
slide thickness:19.2mm
Surface treatment:Zinc Plating
max weight:18"/220kg
length:12"-60"
The installed forms:side mount
Material thickness:2.5*2.5*2.5mm
Product quality: 250g/2"

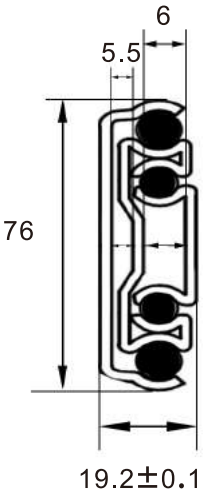

产品图片
Product Picture


适用范围 Application range

工业抽屉、货柜、房车、金融设备/改装车辆等



孔位示意图 Installation indication

图示Graphic:18"

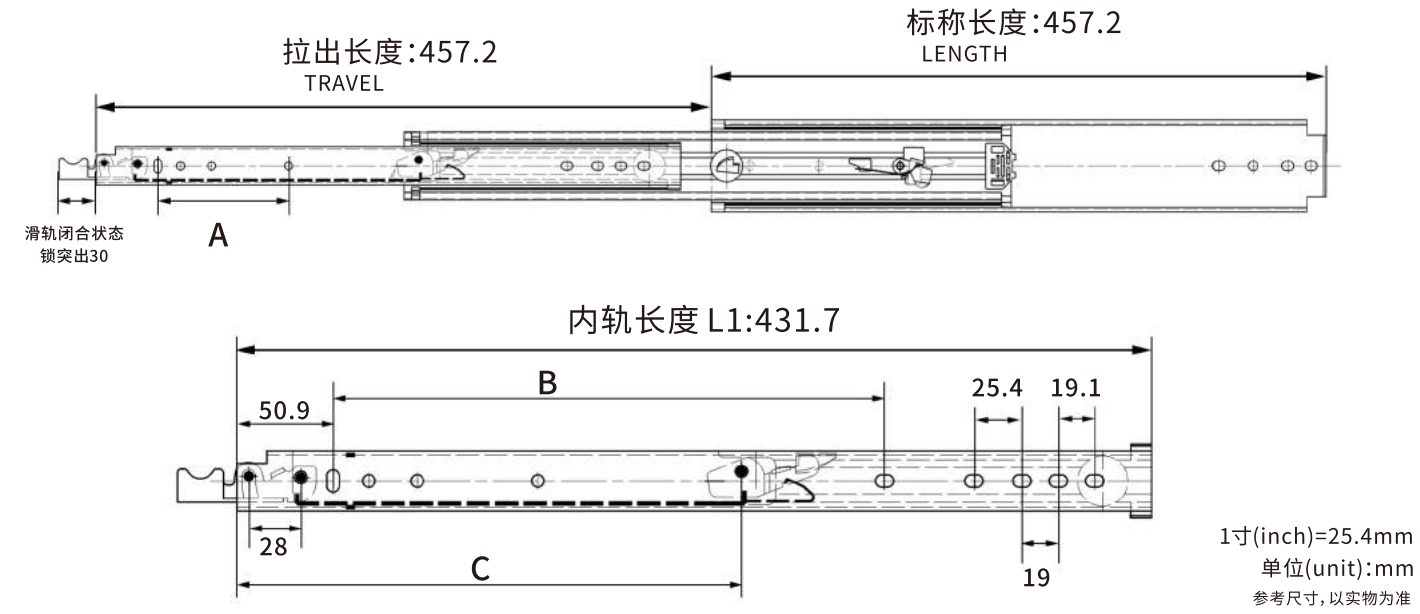


订货编号 Model	拉出长度±3 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES L1±0.5	A	B	C	套/箱 Sets/ctn
D2576-12"	304.8	304.8	279.3	-	-	-	4
D2576-14"	355.6	355.6	330.1	-	185.6	191.4	4
D2576-16"	406.4	406.4	380.9	107.9	236.4	216.8	4
D2576-18"	457.2	457.2	431.7	107.9	287.2	242.3	4
D2576-20"	508	508	482.5	107.9	277.8	267.3	4
D2576-22"	558.8	558.8	533.3	107.9	328.6	292.8	4
D2576-24"	609.6	696	584.1	107.9	379.4	318.6	4
D2576-26"	660.4	660.4	634.9	107.9	430.2	344.1	4
D2576-28"	711.2	711.2	685.7	107.9	481	369.3	4
D2576-30"	762	762	736.5	107.9	531.8	395.4	2
D2576-32"	812.8	812.8	787.3	107.9	582.6	419.9	2
D2576-34"	836.6	863.6	838.1	107.9	633.4	445.7	2
D2576-36"	914.4	914.4	888.9	107.9	684.2	471.2	2
D2576-38"	965.2	965.2	939.7	107.9	735	495.5	2
D2576-40"	1016	1016	990.5	107.9	785.8	521.4	2
D2576-42"	1066.8	1066.8	1014.3	107.9	836.6	547.3	2
D2576-44"	1117.6	1117.2	1092.1	107.9	887.4	572.3	2
D2576-46"	1168.4	1168.4	1142.9	107.9	938.2	597.8	2
D2576-48"	1219.2	1219.2	1193.7	107.9	989	623.1	2
D2576-50"	1270	1270	1244.5	107.9	1039.8	646.6	2
D2576-52"	1320.8	1320.8	1295.3	107.9	1090.6	674.3	2
D2576-54"	1371.6	1371.6	1346.1	107.9	1141.4	699.2	2
D2576-56"	1422.4	1422.4	1396.9	107.9	1192.2	724.5	2
D2576-58"	1473.2	1473.2	1447.7	107.9	1243	751.3	2
D2576-60"	1524	1524	1498.5	107.9	1293.8	774.3	2

71宽重型工业滑轨 A2071

HEAVY DUTY BALL BEARING SLIDE

材质:冷轧钢 /Q235
宽度:71mm
安装厚度:18.5mm
表面处理:镀锌
承重:18"/150kg
规格长度:10"-48"
安装形式:抽屉侧面
材料厚度:2.0*1.8*2.0mm
产品质量:192g/2"

Material:cold-rolled steel /Q235
Slide width:71mm
slide thickness:18.5mm
Surface treatment:Zinc Plating
max weight:18"/150kg
length:10"-48"
The installed forms:side mount
Material thickness:2.0*1.8*2.0mm
Product quality: 192g/2"

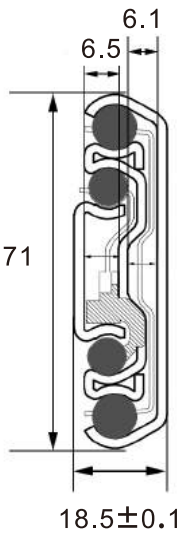

产品图片
Product Picture


适用范围 Application range

工业抽屉、货柜、房车、金融设备/改装车辆等



孔位示意图 Installation indication

图示Graphic:18"

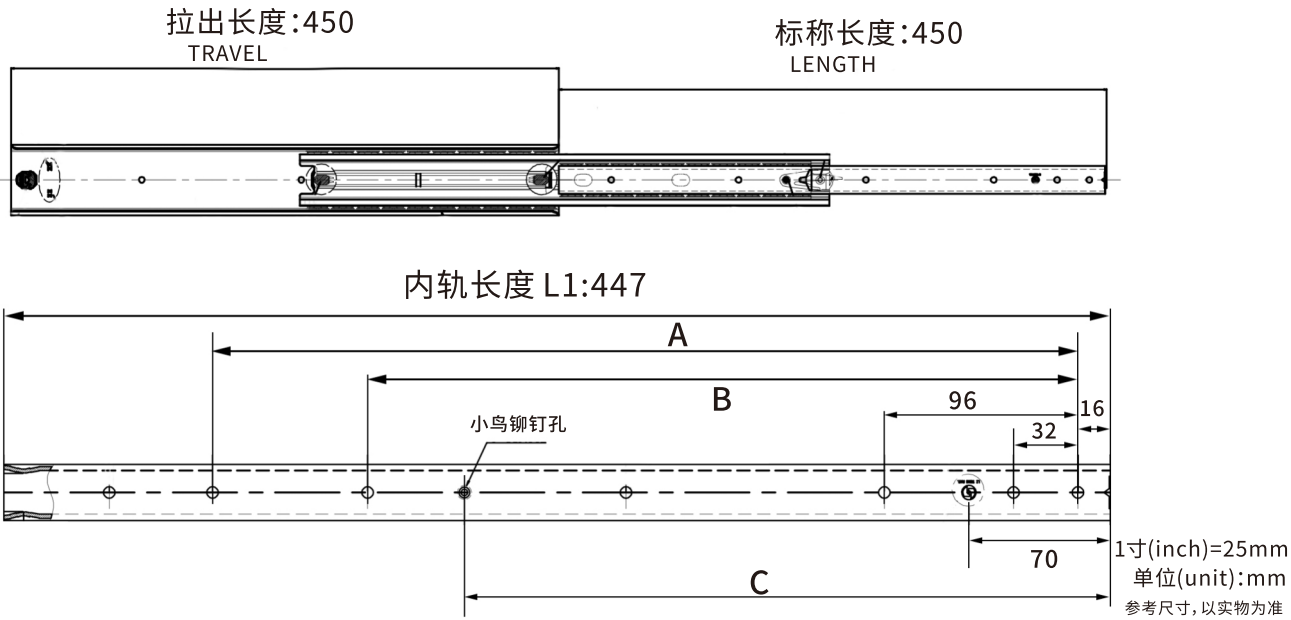

订货编号 Model	拉出长度 TRAVEL	标称长度±4 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES L1±0.5	A	B	C	套/箱 Sets/ctn
A2071-10"	250	250	247	-	192	173	5
A2071-12"	300	300	297	-	256	198	5
A2071-14"	350	350	347	-	288	223	5
A2071-16"	400	400	397	320	160	248	5
A2071-18"	450	450	447	384	192	273	5
A2071-20"	500	500	497	416	224	298	5
A2071-22"	550	550	547	384	224	323	5
A2071-24"	600	600	597	384	224	348	5
A2071-26"	650	650	647	384	224	373	5
A2071-28"	700	700	697	608	416	398	5
A2071-30"	750	750	747	672	448	423	5
A2071-32"	800	800	797	704	480	448	5
A2071-34"	850	850	847	768	512	473	5
A2071-36"	900	900	897	832	576	498	5
A2071-38"	950	950	947	864	576	523	5
A2071-40"	1000	1000	997	768	576	548	5
A2071-42"	1050	1050	1047	768	608	573	5
A2071-44"	1100	1100	1097	768	608	598	5
A2071-46"	1150	1150	1147	832	608	623	5
A2071-48"	1200	1200	1197	832	6085	648	5
A2071-50"	1270	1270	1244.5	158.8	1090.7	60.2	5
A2071-52"	1320.8	1320.8	1295.3	158.8	1141.5	60.2	2

53宽重型工业滑轨 A2053

HEAVY DUTY BALL BEARING SLIDE

材质:冷轧钢 /Q235

宽度:53mm

安装厚度:19mm

表面处理:封蓝

承重:18"/120kg

规格长度:10"-60"

安装形式:抽屉侧面

材料厚度:2.0*2.0*2.0mm

产品质量:132g/2"

Material:cold-rolled steel /Q235

Slide width:53mm

slide thickness:19mm

Surface treatment:Zinc Plating


max weight:18"/120kg

length:10"-60"

The installed forms:side mount

Material thickness:2.0*2.0*2.0mm

Product quality: 132g/2"

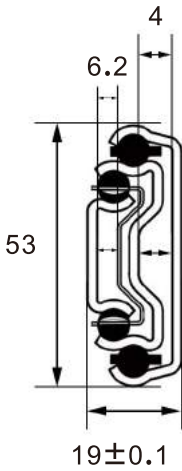

产品图片
Product Picture


适用范围 Application range

工业抽屉、货柜、房车、金融设备/改装车辆等



孔位示意图 Installation indication

图示Graphic:18"

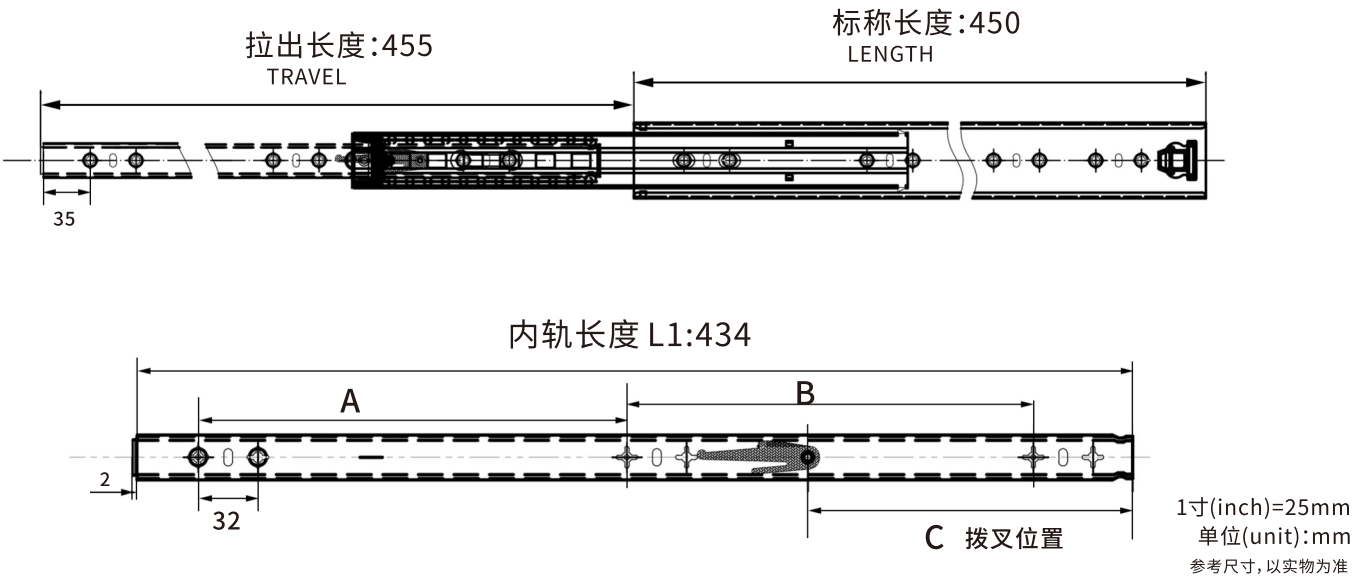


订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES L1±0.5	A	B	C	套/箱 Sets/ctn
A2053-10"	260	250	230	-	-	58	10
A2053-12"	300	300	284	-	-	77	10
A2053-14"	355	350	334	128	96	95	10
A2053-16"	405	400	384	128	128	125	10
A2053-18"	455	450	434	128	224	149	10
A2053-20"	515	500	484	128	224	165	10
A2053-22"	565	550	534	192	224	191	8
A2053-24"	615	600	584	224	256	211	8
A2053-26"	665	650	634	256	256	241	8
A2053-28"	715	700	684	288	288	266	8
A2053-30"	765	750	734	224	416	293	4
A2053-32"	815	800	784	224	448	314	4
A2053-34"	865	850	834	224	480	340	4
A2053-36"	905	900	884	256	512	352	4
A2053-38"	965	950	934	-	-	368	4
A2053-40"	1010	1000	982	288	608	391	4
A2053-42"	1050	1050	1045	288	640	465	4
A2053-44"	1110	1100	1084	352	640	500	4
A2053-46"	1160	1150	1134	320	672	521	4
A2053-48"	1210	1200	1184	352	736	546	4
A2053-50"	1260	1250	1284	384	736	571	4
A2053-52"	1310	1300	1284	384	800	596	4
A2053-54"	1360	1350	1334	416	832	616	4
A2053-56"	1410	1400	1384	320	960	591	4

53宽带锁重型工业滑轨 D2053

HEAVY DUTY BALL BEARING SLIDE

材质:冷轧钢/Q235
宽度:53mm
安装厚度:19mm
表面处理:封蓝
承重:18"/120kg
规格长度:10"-40"
安装形式:抽屉侧面
材料厚度:2.0*2.0*2.0mm
产品质量:132g/2"

Material:cold-rolled steel/Q235
Slide width:53mm
slide thickness:19mm
Surface treatment:Zinc Plating
max weight:18"/120kg
length:10"-40"
The installed forms:side mount
Material thickness:2.0*2.0*2.0mm
Product quality: 132g/2"

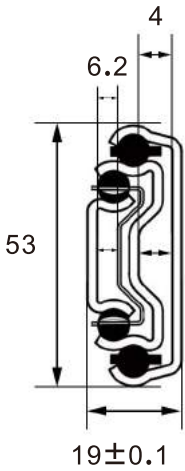

产品图片
Product Picture


适用范围 Application range

工业抽屉、货柜、房车、金融设备/改装车辆等



孔位示意图 Installation indication

图示Graphic:18"

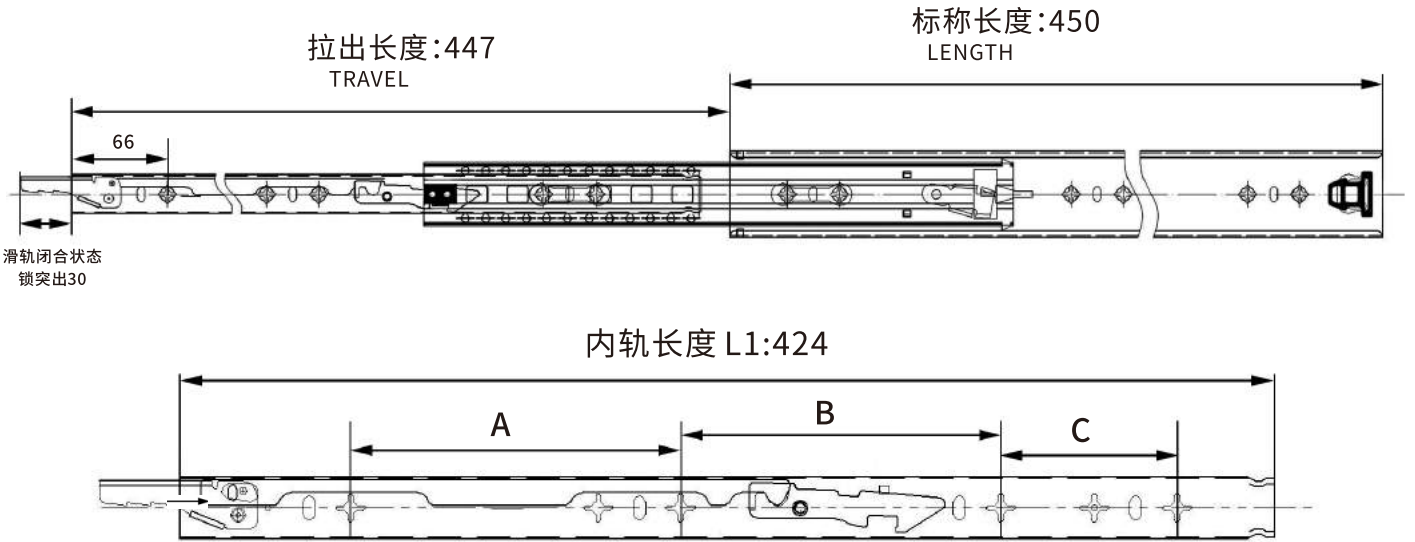

1寸(inch)=25mm
单位(unit):mm
参考尺寸,以实物为准


订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES L1±0.5	A	B	C	套/箱 Sets/ctn
D2053-10"	265	250	250	-	-	-	10
D2053-12"	297	300	272	-	-	-	10
D2053-14"	347	350	324	-	-	-	10
D2053-16"	397	450	374	-	-	-	10
D2053-18"	447	450	424	128	-	-	10
D2053-20"	497	500	474	160	192	-	10
D2053-22"	547	550	524	160	256	-	8
D2053-24"	597	600	584	160	320	-	8
D2053-26"	647	650	624	192	320	-	8
D2053-28"	697	700	672	256	320	-	8
D2053-30"	747	750	722	224	224	192	4
D2053-32"	797	800	772	224	224	224	4
D2053-34"	847	850	824	224	256	340	4
D2053-36"	897	900	872	256	256	256	4
D2053-38"	947	950	927	256	288	256	4
D2053-40"	997	1000	972	288	288	288	4

53宽阻尼重型工业滑轨 K2053

HEAVY DUTY BALL BEARING SLIDE

材质:冷轧钢/Q235
宽度:53mm
安装厚度:19mm
表面处理:封蓝
承重:18"/120kg
规格长度:10"-24"
安装形式:抽屉侧面
材料厚度:2.0*2.0*2.0mm
产品质量:132g/2"

Material:cold-rolled steel/Q235
Slide width:53mm
slide thickness:19mm
Surface treatment:Zinc Plating
max weight:18"/120kg
length:10"-24"
The installed forms:side mount
Material thickness:2.0*2.0*2.0mm
Product quality: 132g/2"

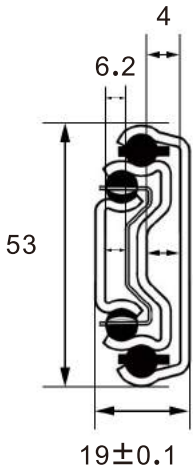

产品图片
Product Picture


适用范围 Application range

工业抽屉、货柜、房车、金融设备/改装车辆等



孔位示意图 Installation indication

图示Graphic:18"

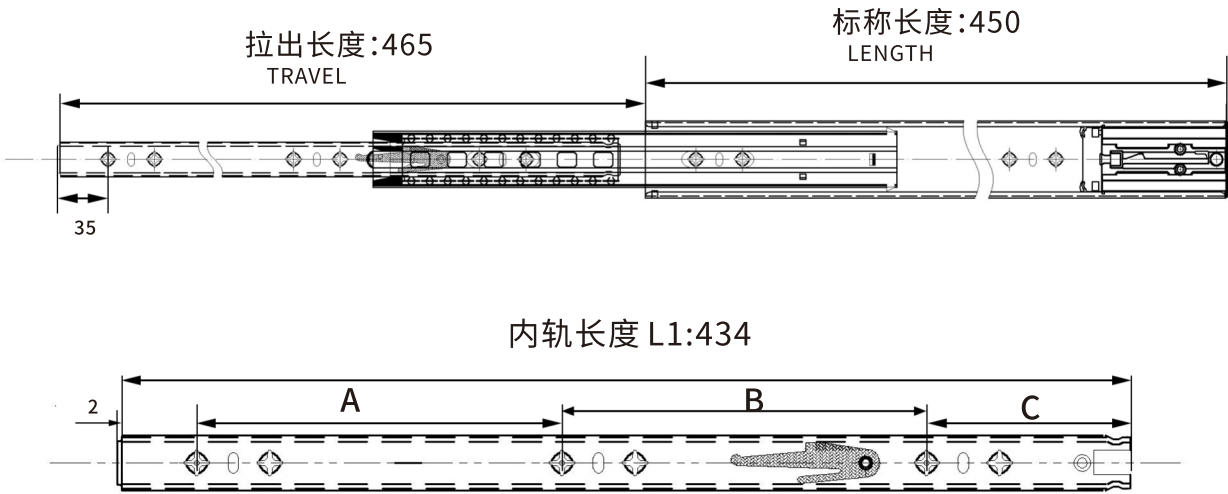

1寸(inch)=25mm
单位(unit):mm
参考尺寸,以实物为准


订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES L1±0.5	A	B	C	套/箱 Sets/ctn
K2053-10"	265	250	242	175	-	-	10
K2053-12"	315	300	292	224	-	-	10
K2053-14"	365	350	342	256	-	-	10
K2053-16"	415	400	392	128	160	-	10
K2053-18"	465	450	441	160	160	-	10
K2053-20"	515	500	492	192	192	-	10
K2053-22"	565	550	542	192	224	-	8
K2053-24"	615	600	592	224	256	-	8
K2053-26"	665	650	642	256	256	-	8
K2053-28"	715	700	692	288	288	-	8
K2053-30"	765	750	742	224	224	192	4
K2053-32"	815	800	792	224	256	192	4

51宽重型工业滑轨 A1551

HEAVY DUTY BALL BEARING SLIDE

材质:冷轧钢 /Q235
宽度:51mm
安装厚度:12.7mm
表面处理:封蓝
承重:18"/68kg
规格长度:10"-40"
安装形式:抽屉侧面
材料厚度:1.5*1.5*1.5mm
产品质量:99g/2"

Material:cold-rolled steel /Q235
Slide width:51mm
slide thickness:12.7mm
Surface treatment:Zinc Plating
max weight:18"/68kg
length:10"-40"
The installed forms:side mount
Material thickness:1.5*1.5*1.5mm
Product quality: 99g/2"

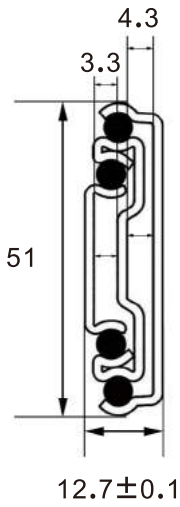

产品图片
Product Picture


适用范围 Application range

工业抽屉、货柜、房车、金融设备/改装车辆等



孔位示意图 Installation indication

图示Graphic:18"

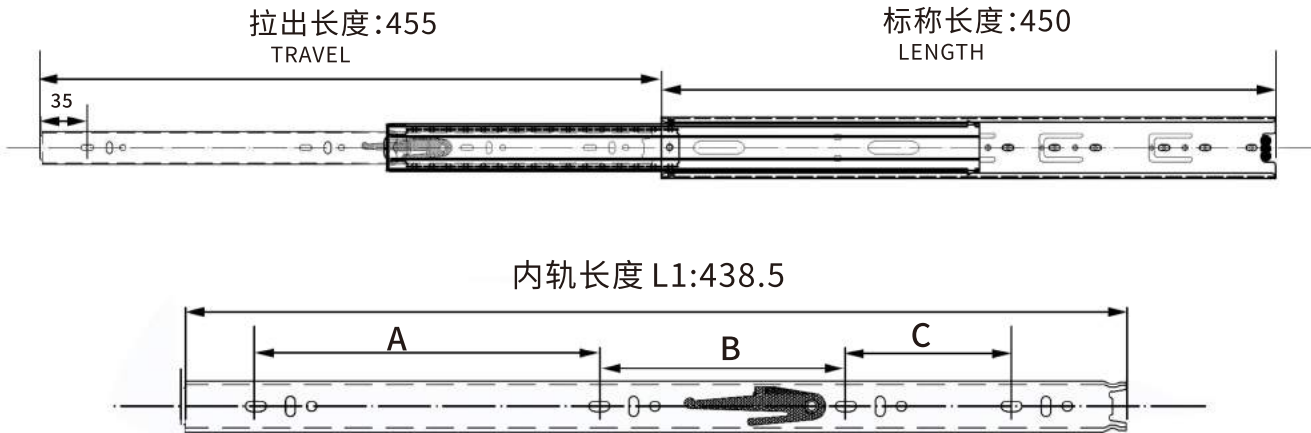

1寸(inch)=25mm
单位(unit):mm
参考尺寸,以实物为准


订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES L1±0.5	A	B	C	套/箱 Sets/ctn
A1551-10"	250	250	238.5	160	-	-	10
A1551-12"	310	300	288.5	96	112	-	10
A1551-14"	360	350	338.5	128	128	-	10
A1551-16"	410	400	388.5	128	192	-	10
A1551-18"	460	450	438.5	160	192	-	10
A1551-20"	510	500	488.5	192	224	-	10
A1551-22"	565	550	538.5	224	224	-	8
A1551-24"	615	600	588.5	224	288	-	8
A1551-26"	665	650	638.5	256	288	-	8
A1551-28"	715	700	688.5	288	320	-	8
A1551-30"	765	750	738.5	320	320	-	8
A1551-32"	815	800	788.5	256	256	192	8
A1551-34"	865	850	885	256	256	256	4
A1551-36"	915	900	888.5	256	288	256	4
A1551-38"	965	950	938.5	288	288	288	4
A1551-40"	1015	1000	988.5	288	320	288	4

51宽带锁重型工业滑轨 D1551

HEAVY DUTY BALL BEARING SLIDE

材质:冷轧钢/Q235
宽度:51mm
安装厚度:12.7mm
表面处理:封蓝
承重:18"/68kg
规格长度:12"-40"
安装形式:抽屉侧面
材料厚度:1.5*1.5*1.5mm
产品质量:99g/2"

Material:cold-rolled steel/Q235
Slide width:51mm
slide thickness:12.7mm
Surface treatment:Zinc Plating
max weight:18"/68kg
length:12"-40"
The installed forms:side mount
Material thickness:1.5*1.5*1.5mm
Product quality: 99g/2"

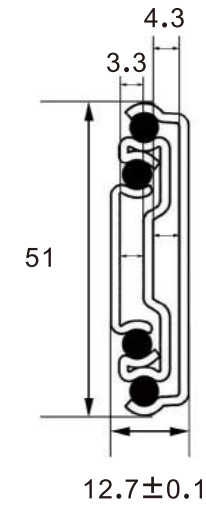

产品图片
Product Picture


适用范围 Application range

工业抽屉、货柜、房车、金融设备/改装车辆等



孔位示意图 Installation indication

图示Graphic:18"

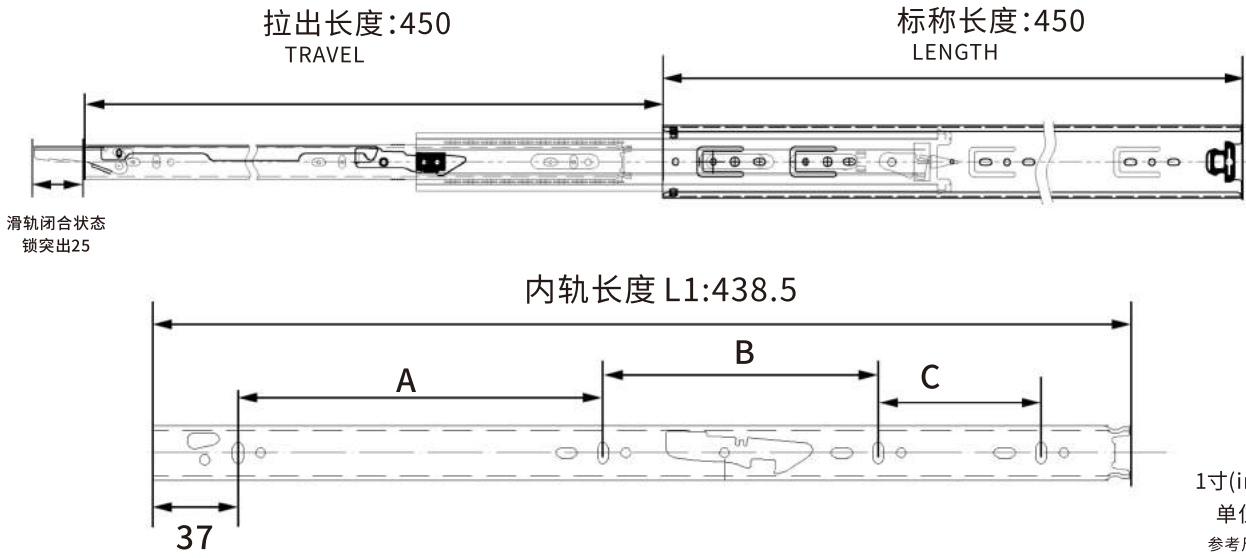

订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES L1±0.5	A	B	C	套/箱 Sets/ctn
D1551-12"	310	300	278	96	112	-	10
D1551-14"	360	350	328	128	128	-	10
D1551-16"	410	400	378	128	192	-	10
D1551-18"	450	450	428	160	192	-	10
D1551-20"	510	500	478	192	224	-	10
D1551-22"	560	550	528	224	224	-	8
D1551-24"	610	600	578	224	288	-	8
D1551-26"	660	650	628	256	288	-	8
D1551-28"	710	700	678	288	320	-	8
D1551-30"	760	750	728	320	320	-	8
D1551-32"	810	800	778	256	256	192	8
D1551-34"	865	850	838.5	256	256	256	4
D1551-36"	915	900	888.5	256	288	256	4
D1551-38"	965	950	938.5	288	288	288	4
D1551-40"	965	950	988.5	288	320	288	4

BALL BEARING SLIDE SERIES

抽屉滑轨系列



精工铸造的钢珠运行于滑轨滑道中，分散负荷在各个方位上
确保侧向稳定性，更有阻尼装置精髓所在。
日复一日，年复一年，为家居带来长久、愉悦的使用体验。

*The cast steel balls run in the slideway and distribute the load in all directions. To ensure lateral stability,
Day after day, year after year, bring a long and joyful experience to home.*

专注成就专业
滑轨·铰链

三节钢珠滑轨 A4510



BALL BEARING SLIDE SERIES

材质:冷轧钢
宽度:45mm
安装厚度:12.5mm
表面处理:电泳黑
承重:18"/45kg
规格长度:4"-24"
安装形式:抽屉侧面
材料厚度:1.0*1.0*1.2mm
产品质量:60g/2''

Material:cold-rolled steel
Slide width:45mm
slide thickness:12.5mm
Surface treatment:black
max weight:18"/45kg
length:4"-24"
The installed forms:side mount
Material thickness:1.0*1.0*1.2mm
Product quality: 60g/2''



产品图片
Product Picture

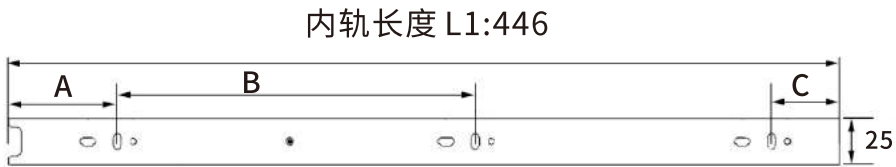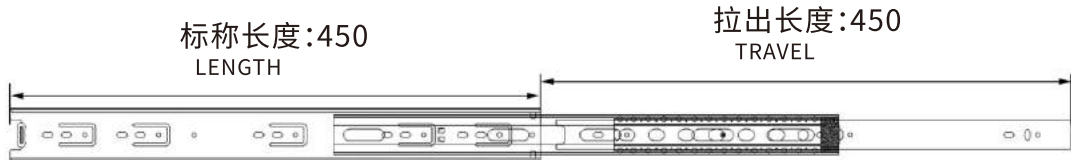

孔位示意图 Installation indication

图示Graphic: 18"

订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES L1±0.5	A B C			套/箱 Sets/ctn
				A	B	C	
A4510-4"	51	100	97	61	-	36	15
A4510-6"	144	150	146	-	95	36	15
A4510-8"	185	200	196	33	127	37	15
A4510-10"	250	250	168	42	168	37	15
A4510-12"	300	300	301	38	128	53	15
A4510-14"	345	350	347	54	128	53	15
A4510-16"	400	400	398	41	192	52	15
A4510-18"	450	450	446	58	192	52	15
A4510-20"	500	500	496	44	224	52	15
A4510-22"	550	550	548	65	224	52	15
A4510-24"	550	600	597	49	321	52	15

1寸(inch)=25mm
单位(unit):mm
参考尺寸, 以实物为准

三节加厚钢珠滑轨 A4512


BALL BEARING SLIDE SERIES

材质:冷轧钢
宽度:45mm
安装厚度:12.5mm
表面处理:电泳黑
承重:18"/45kg
规格长度:8"-24"
安装形式:抽屉侧面
材料厚度:1.2*1.2*1.5mm
产品质量:76g/2''

Material:cold-rolled steel
Slide width:45mm
slide thickness:12.5mm
Surface treatment:black
max weight:18"/45kg
length:8"-24"
The installed forms:side mount
Material thickness:1.2*1.2*1.5mm
Product quality: 76g/2''



产品图片
Product Picture

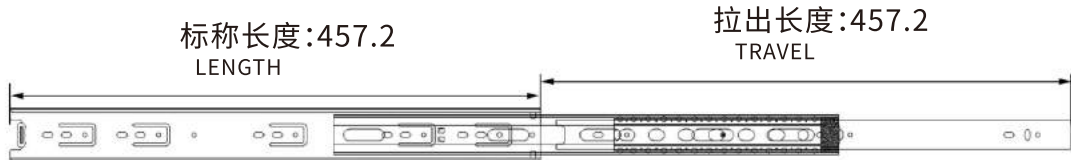

孔位示意图 Installation indication

图示Graphic: 18"

订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES L1±0.5	A B C			套/箱 Sets/ctn
				A	B	C	
A4512-8"	203.2	203.2	200	22	62	50	15
A4512-10"	254	254	247	29.1	167.2	50.5	15
A4512-12"	304.8	304.8	302	26	162	51	15
A4512-14"	355.6	355.6	350	44	188	51	15
A4512-16"	406.4	406.4	402	31	201	50	15
A4512-18"	457.2	457.2	453	53	222	50	15
A4512-20"	508	508	500	37	254	50	15
A4512-22"	558.8	558.8	555	56	257	50	15
A4512-24"	619.6	619.6	603	43	318	50	15


1寸(inch)=25.4mm
单位(unit):mm
参考尺寸, 以实物为准

三节钢珠缓冲滑轨 K1245



BALL BEARING SLIDE SERIES

材质:冷轧钢
宽度:45mm
安装厚度:12.5mm
表面处理:电泳黑
承重:18"/45kg
规格长度:10"-24"
安装形式:抽屉侧面
材料厚度:1.2*1.2*1.5mm
产品质量:70g/2"

Material:cold-rolled steel
Slide width:45mm
slide thickness:12.5mm
Surface treatment:black
max weight:18"/45kg
length:10"-24"
The installed forms:side mount
Material thickness:1.2*1.2*1.5mm
Product quality: 70g/2"

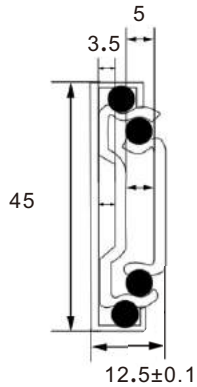

产品图片
Product Picture

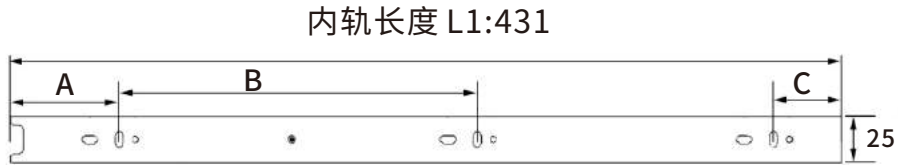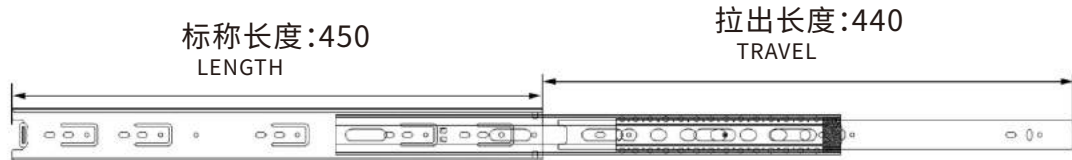

孔位示意图 Installation indication

图示Graphic:18"

订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES				套/箱 Sets/ctn
			L1±0.5	A	B	C	
K1245-10"	250	149	242	-	-	49	15
K1245-12"	300	248	287	-	-	49	15
K1245-14"	350	313	334	-	182	49	15
K1245-16"	400	380	383	95	103	49	15
K1245-18"	450	440	431	101	122	49	15
K1245-20"	502	495	485	116	127	49	15
K1245-22"	550	542	536	103	191	49	15
K1245-24"	600	595	575	175	187	48	15


1寸(inch)=25mm
单位(unit):mm
参考尺寸,以实物为准

三节钢珠反弹滑轨 F1245



BALL BEARING SLIDE SERIES

材质:冷轧钢
宽度:45mm
安装厚度:12.5mm
表面处理:电泳黑
承重:18"/45kg
规格长度:10"-24"
安装形式:抽屉侧面
材料厚度:1.2*1.2*1.5mm
产品质量:71g/2"

Material:cold-rolled steel
Slide width:45mm
slide thickness:12.5mm
Surface treatment:black
max weight:18"/45kg
length:10"-24"
The installed forms:side mount
Material thickness:1.2*1.2*1.5mm
Product quality: 71g/2"

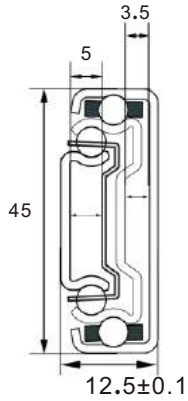

产品图片
Product Picture

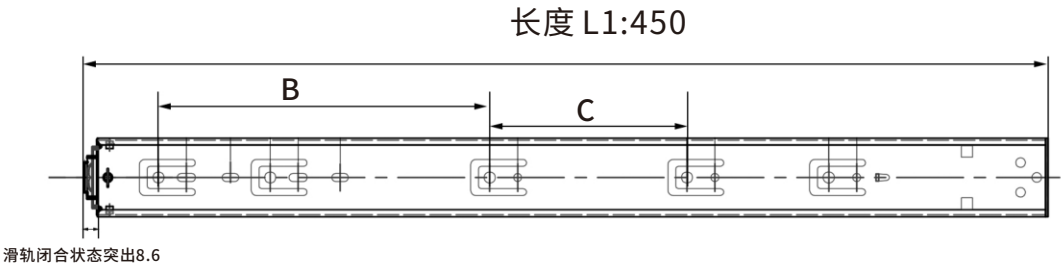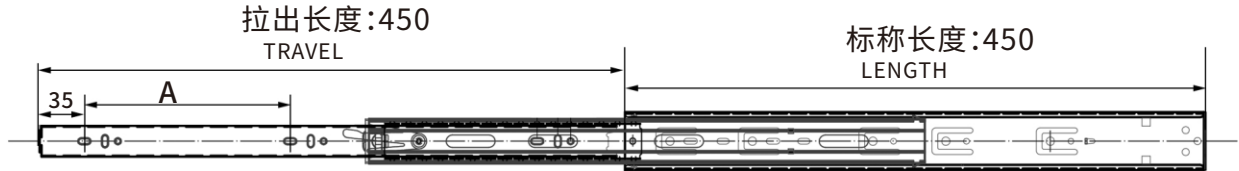

孔位示意图 Installation indication

图示Graphic:18"


订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES				套/箱 Sets/ctn
			L1±0.5	A	B	C	
F1245-10"	250	250	250	64	-	-	15
F1245-12"	300	300	300	96	64	-	15
F1245-14"	350	350	350	96	96	-	15
F1245-16"	400	400	400	1	96	64	15
F1245-18"	450	450	450	160	96	96	15
F1245-20"	500	500	500	192	128	128	15
F1245-22"	550	550	550	224	160	128	15
F1245-24"	600	600	600	224	128	128	15

1寸(inch)=25mm
单位(unit):mm
参考尺寸,以实物为准

三节钢珠滑轨 A1035

BALL BEARING SLIDE SERIES

材质:冷轧钢
宽度:35mm
安装厚度:12.5mm
表面处理:电泳黑
承重:18"/35kg
规格长度:10"-18"
安装形式:抽屉侧面
材料厚度:1.0*1.0*1.0mm
产品质量:50g/2"
Material:cold-rolled steel
Slide width:35mm
slide thickness:12.5mm
Surface treatment:black
max weight:18"/35kg
length:10"-18"
The installed forms:side mount
Material thickness:1.0*1.0*1.0mm
Product quality: 50g/2"

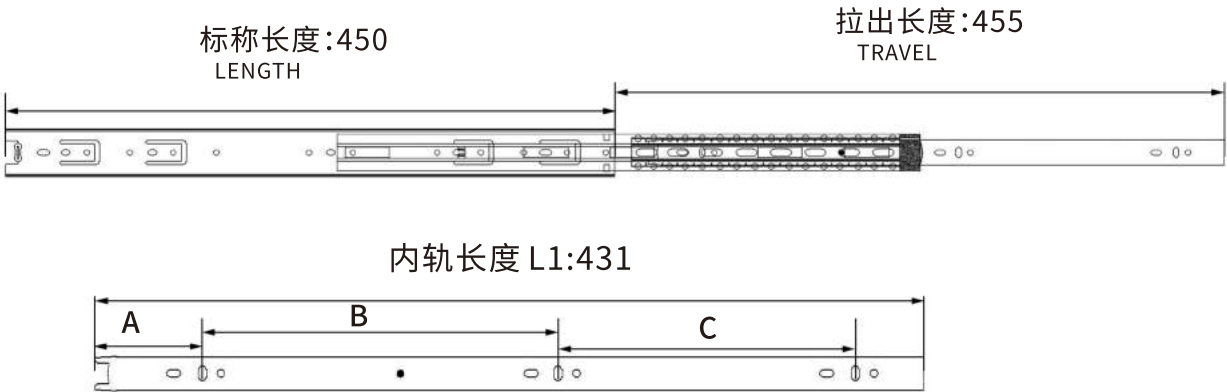

孔位示意图 Installation indication

图示Graphic:18"


订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES				套/箱 Sets/ctn
			L1±0.5	A	B	C	
A1035-10"	255	250	247	42	169	-	20
A1035-12"	305	300	298	54	113	97	20
A103514"	355	350	346	54	138	118	20
A1035-16"	405	400	382	42	191	127	20
A1035-18"	455	450	448	58	193	161	20

1寸(inch)=25mm
单位(unit):mm
参考尺寸,以实物为准

两节钢珠滑轨 A1027

BALL BEARING SLIDE SERIES

材质:冷轧钢
宽度:27mm
安装厚度:9.5mm
表面处理:电泳黑
承重:18"/20kg
规格长度:10"-18"
安装形式:抽屉侧面
材料厚度:1.0*1.0mm
产品质量:26g/2"
Material:cold-rolled steel
Slide width:27mm
slide thickness:9.5mm
Surface treatment:black
max weight:18"/20kg
length:10"-18"
The installed forms:side mount
Material thickness:1.0*1.0mm
Product quality: 26g/2"

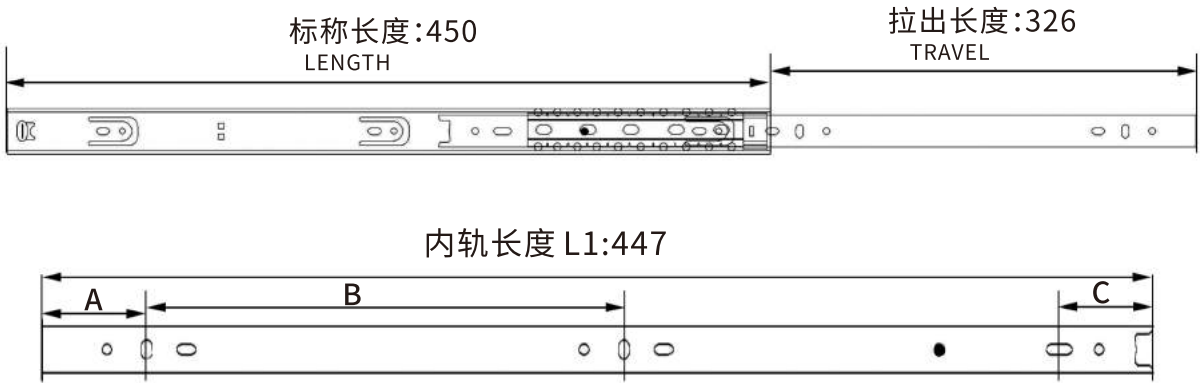

孔位示意图 Installation indication

图示Graphic:18"

订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES				套/箱 Sets/ctn
			L1±0.5	A	B	C	
A1027-10"	255	162	247	42	96	17	30
A1027-12"	300	212	298	42	128	32	30
A102714"	350	235	349	42	128	51	30
A1027-16"	400	272	396	42	160	36	30
A1027-18"	450	326	447	42	192	38	30

1寸(inch)=25mm
单位(unit):mm
参考尺寸,以实物为准

16板两节托底隐藏缓冲滑轨 K216


BALL BEARING SLIDE SERIES

材质:冷轧钢
宽度:42mm
安装厚度:5×24.5mm
表面处理:镀锌
承重:18"/35kg
规格长度:10"-24"
安装形式:抽屉侧面
材料厚度:1.5*1.5mm
产品质量:65g/2''


Material:cold-rolled steel
Slide width:42mm
slide thickness:5×24.5mm
Surface treatment:Zinc Plating
max weight:18"/35kg
length:10"-24"
The installed forms:side mount
Material thickness:1.5*1.5mm
Product quality: 65g/2''



产品图片
Product Picture

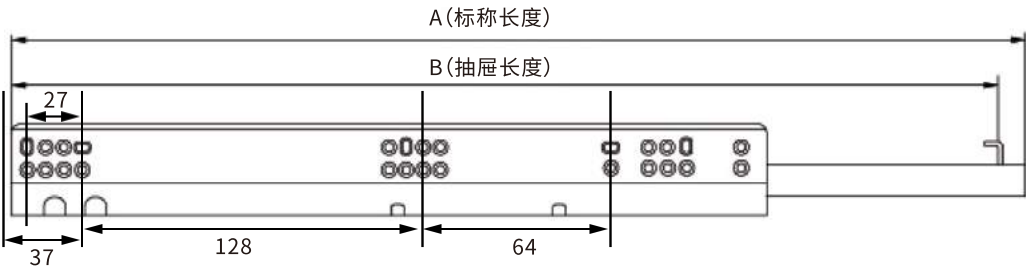


宽度尺寸 Width dimensions

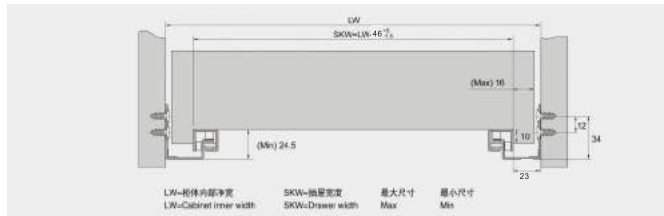


1寸(inch)=25mm						
规格	10"	12"	14"	16"	18"	20"
A	260	310	360	410	460	510
B	250	300	350	400	450	500

深度尺寸 Depth dimension

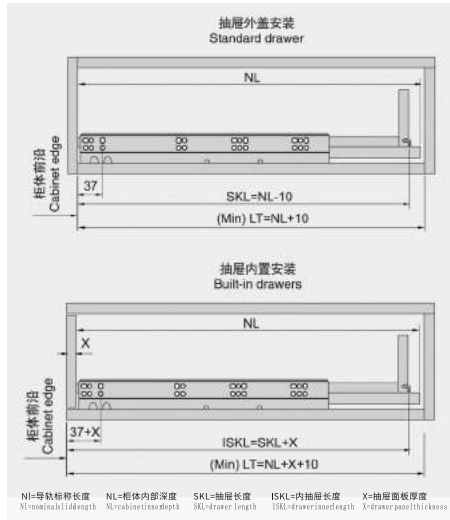

底部加工 Bottom processing

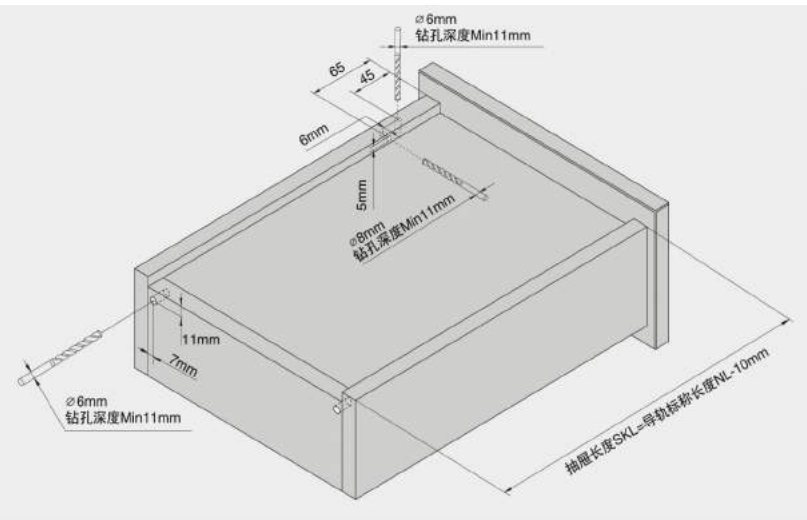

18板两节托底隐藏缓冲滑轨 K230


BALL BEARING SLIDE SERIES

材质:冷轧钢
宽度:42mm
安装厚度:5×24.5mm
表面处理:镀锌
承重:18"/35kg
规格长度:10"-24"
安装形式:抽屉侧面
材料厚度:1.5*1.5mm
产品质量:65g/2''


Material:cold-rolled steel
Slide width:42mm
slide thickness:5×24.5mm
Surface treatment:Zinc Plating
max weight:18"/35kg
length:10"-24"
The installed forms:side mount
Material thickness:1.5*1.5mm
Product quality: 65g/2''



产品图片
Product Picture

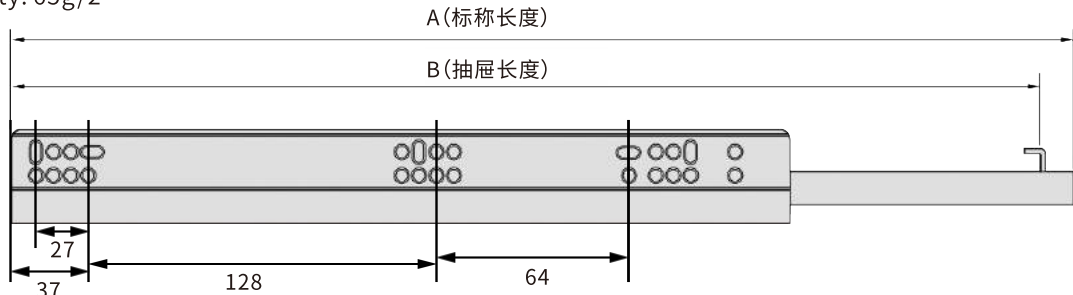


宽度尺寸 Width dimensions

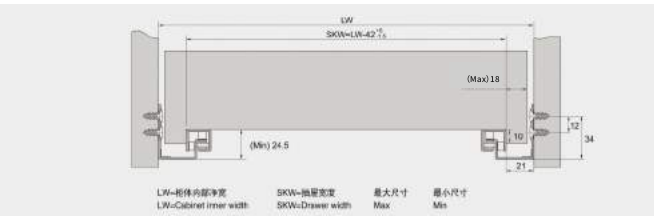


1寸(inch)=25mm								
规格	10"	12"	14"	16"	18"	20"	22"	24"
A	260	310	360	410	460	510	560	610
B	250	300	350	400	450	500	550	600

深度尺寸 Depth dimension

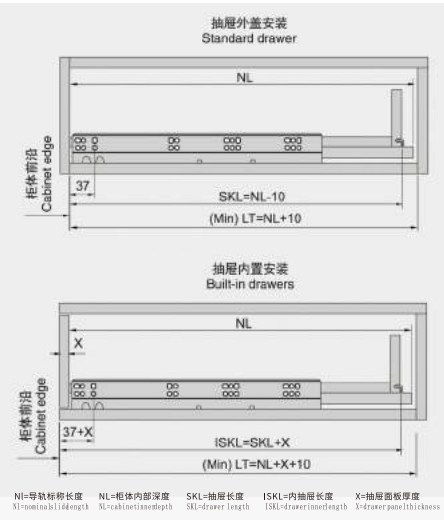

底部加工 Bottom processing

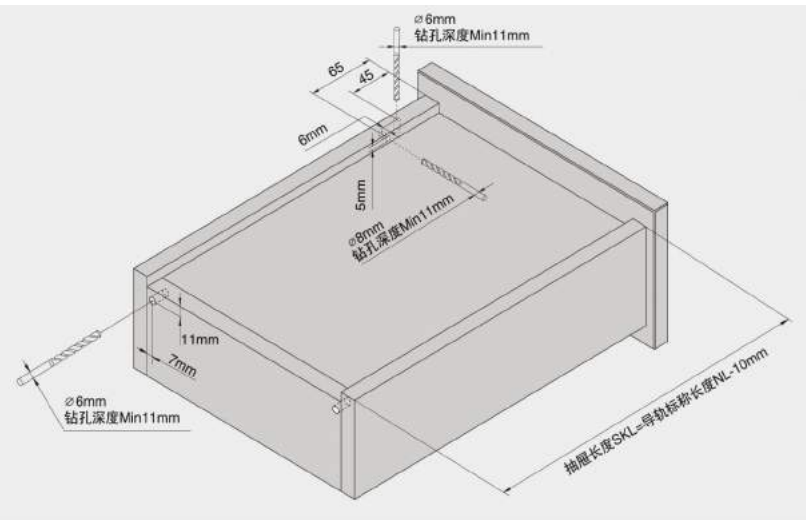


18板三节托底隐藏缓冲滑轨 K330


BALL BEARING SLIDE SERIES

材质:冷轧钢
宽度:42mm
安装厚度:7×30mm
表面处理:镀锌
承重:18"/35kg
规格长度:10"-24"
安装形式:抽屉侧面
材料厚度:1.8*1.5*1.0mm
产品质量:104g/2''

Material:cold-rolled steel
Slide width:42mm
slide thickness:7×30mm
Surface treatment:Zinc Plating
max weight:18"/35kg
length:10"-24"
The installed forms:side mount
Material thickness:1.8*1.5*1.0mm
Product quality: 104g/2''

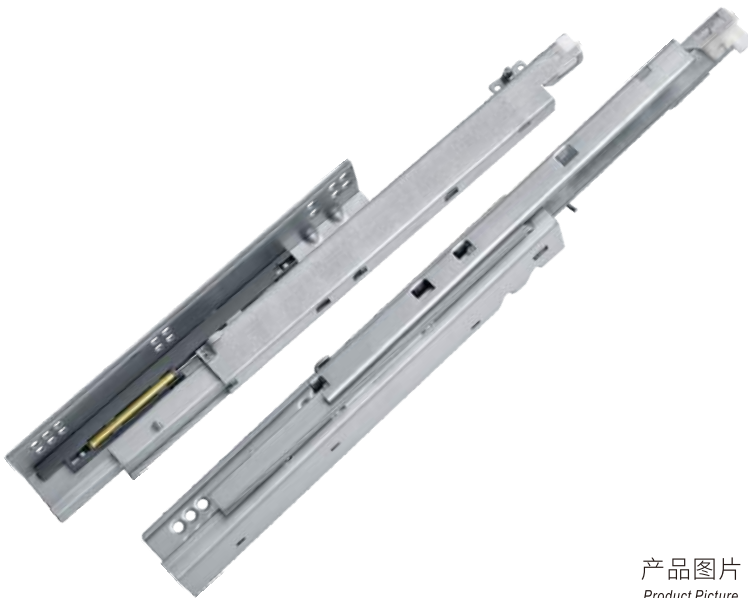


产品图片
Product Picture

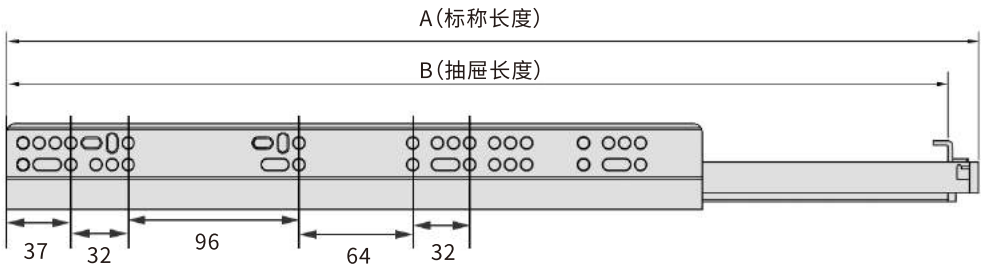


宽度尺寸 Width dimensions



深度尺寸 Depth dimension

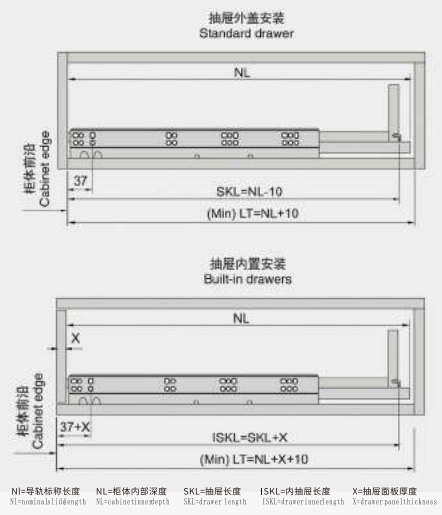

底部加工 Bottom processing

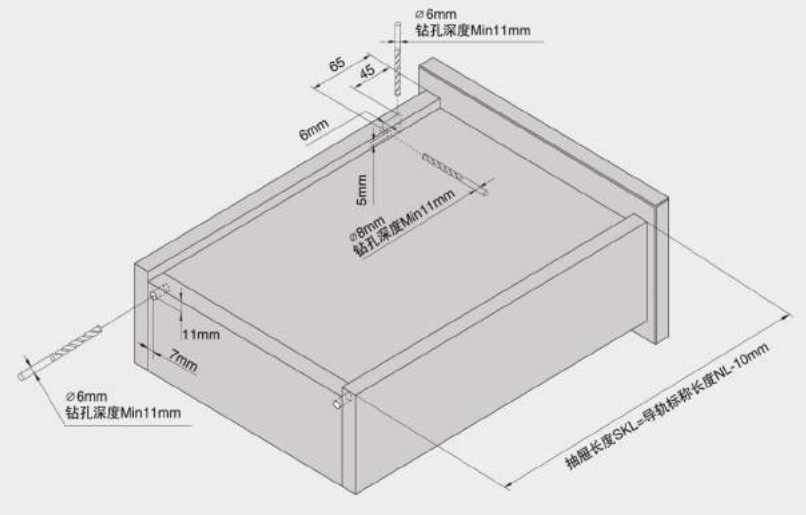


不锈钢三节滑轨 U1045



BALL BEARING SLIDE SERIES

材质:不锈钢
宽度:45mm
安装厚度:12.5mm
表面处理:拉丝
承重:18"/45kg
规格长度:8"-24"
安装形式:抽屉侧面
材料厚度:1.0*1.0*1.0mm
产品质量:56g/2''

Material:Stainless Steel
Slide width:45mm
slide thickness:12.5mm
Surface treatment:Wire drawing
max weight:18"/45kg
length:8"-24"
The installed forms:side mount
Material thickness:1.0*1.0*1.0mm
Product quality: 56g/2''

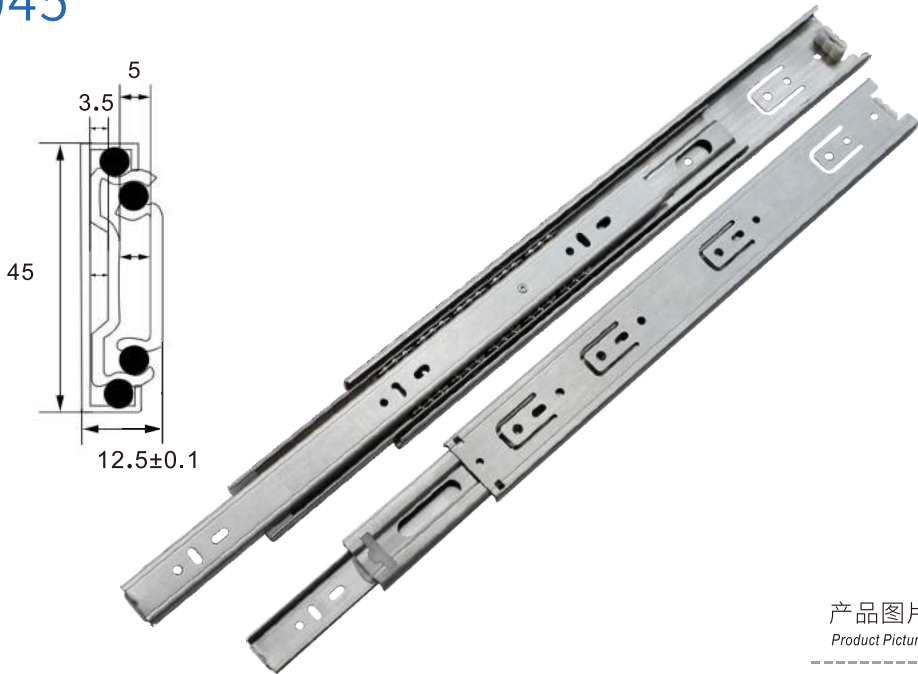

产品图片
Product Picture

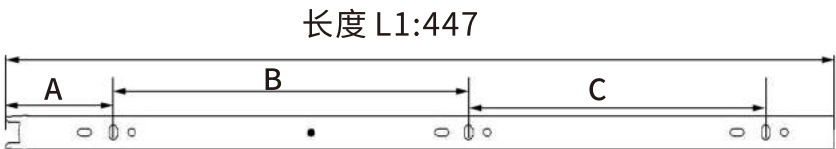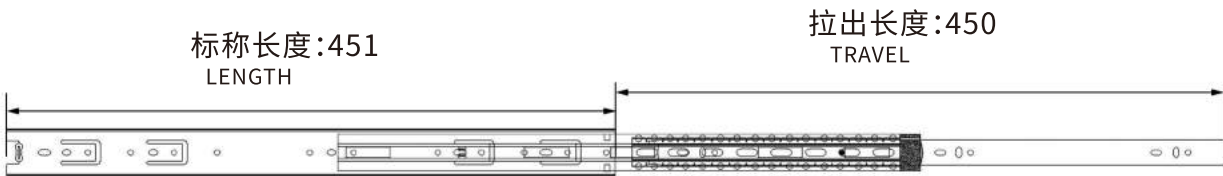

孔位示意图 Installation indication
图示Graphic:18"



订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES L1±0.5			套/箱 Sets/ctn
			A	B	C	
U1045-8"	197	200	200	36	129	15
U1045-10"	250	251	249	51	162	15
U1045-12"	300	300	298	39	127	15
U1045-14"	350	350	348	56	128	15
U1045-16"	405	402	398	43	159	15
U1045-18"	450	451	447	59	192	15
U1045-20"	500	500	498	48	222	15
U1045-22"	555	551	548	64	224	15
U1045-24"	601	601	598	51	255	15

1寸(inch)=25mm
单位(unit):mm
参考尺寸, 以实物为准

不锈钢加厚三节滑轨 U1245

BALL BEARING SLIDE SERIES

材质: 不锈钢
宽度: 45mm
安装厚度: 12.5mm
表面处理: 拉丝
承重: 18"/45kg
规格长度: 6"-24"
安装形式: 抽屉侧面
材料厚度: 1.2*1.2*1.2mm
产品质量: 70g/2"
Material: Stainless Steel
Slide width: 45mm
slide thickness: 12.5mm
Surface treatment: Wire drawing
max weight: 18"/45kg
length: 6"-24"
The installed forms: side mount
Material thickness: 1.2*1.2*1.2mm
Product quality: 70g/2"

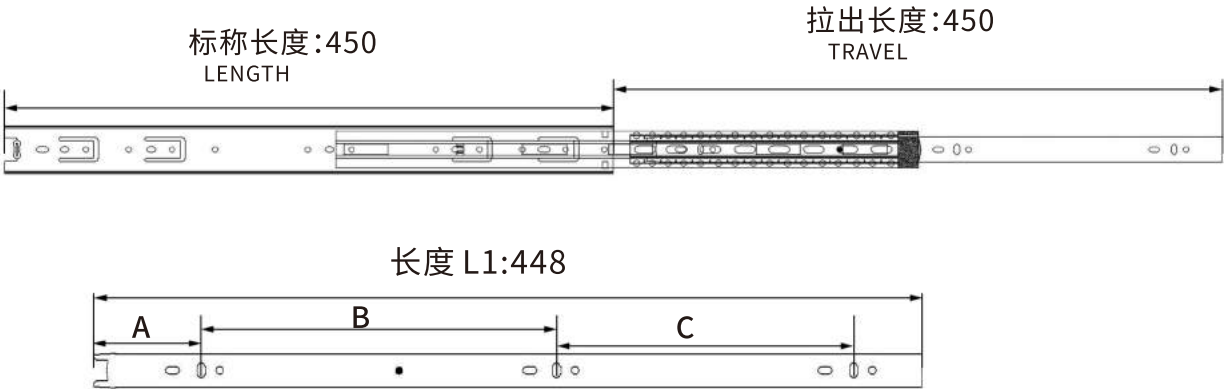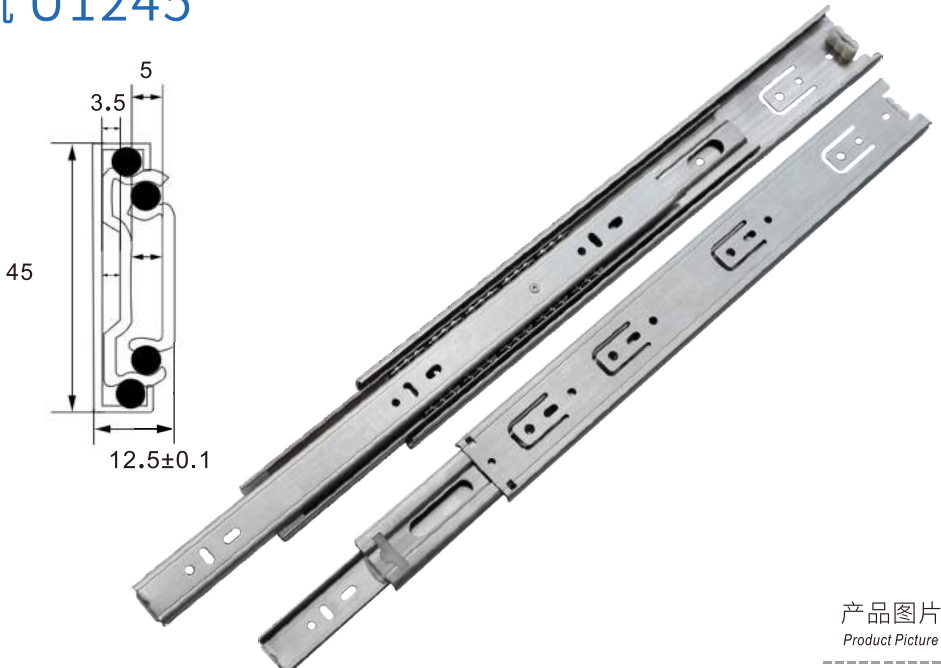

孔位示意图 Installation indication

图示Graphic: 18"


订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES				套/箱 Sets/ctn
			L1±0.5	A	B	C	
U1245-6"	144	150	148	15	107	-	15
U1245-8"	201	200	200	36	113	-	15
U1245-10"	245	250	248	53	159	-	15
U1245-12"	300	300	294	39	125	95	15
U1245-14"	350	350	346	55	128	128	15
U1245-16"	400	400	397	44	159	159	15
U1245-18"	450	450	448	60	193	160	15
U1245-20"	500	500	497	47	222	192	15
U1245-22"	555	550	547	63	223	223	15
U1245-24"	600	600	598	50	255	255	15

1寸(inch)=25mm
单位(unit):mm
参考尺寸, 以实物为准

阻尼不锈钢三节滑轨 U1045K

BALL BEARING SLIDE SERIES

材质: 不锈钢
宽度: 45mm
安装厚度: 12.5mm
表面处理: 拉丝
承重: 18"/45kg
规格长度: 10"-24"
安装形式: 抽屉侧面
材料厚度: 1.0*1.0*1.0mm
产品质量: 55g/2"
Material: Stainless Steel
Slide width: 45mm
slide thickness: 12.5mm
Surface treatment: Wire drawing
max weight: 18"/45kg
length: 10"-24"
The installed forms: side mount
Material thickness: 1.0*1.0*1.0mm
Product quality: 55g/2"

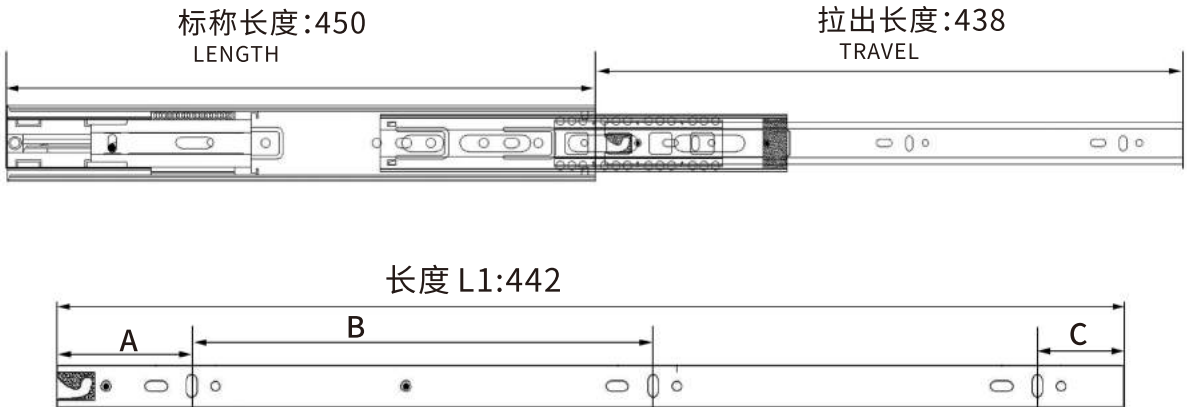

孔位示意图 Installation indication

图示Graphic: 18"

订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES				套/箱 Sets/ctn
			L1±0.5	A	B	C	
U1045K-10"	214	250	243	47	99	34	15
U1045K-12"	282	300	294	39	125	35	15
U1045K-14"	340	352	344	52	127	36	15
U1045K-16"	390	400	393	69	128	36	15
U1045K-18"	438	450	442	56	191	36	15
U1045K-20"	485	500	494	75	192	36	15
U1045K-22"	535	550	548	58	223	35	15
U1045K-24"	585	600	594	79	225	35	15



1寸(inch)=25mm
单位(unit):mm
参考尺寸, 以实物为准

侧装锅碗篮拉篮滑轨 H1245

PULLING BASKET SLIDES

材质:冷轧钢
宽度:45mm
安装厚度:34.7mm
表面处理:镀锌
承重:45kg
规格长度:16"
安装形式:拉篮侧面
材料厚度:1.2*1.2*1.5mm
产品重量:1.5kg/副

Material:cold-rolled steel
Slide width:45mm
slide thickness:34.7mm
Surface treatment:Zinc-Plated
max weight:45kg
length:16"
The installed forms:side mount
Material thickness:1.2*1.2*1.5mm
Product weight: 1.5kg/ pair

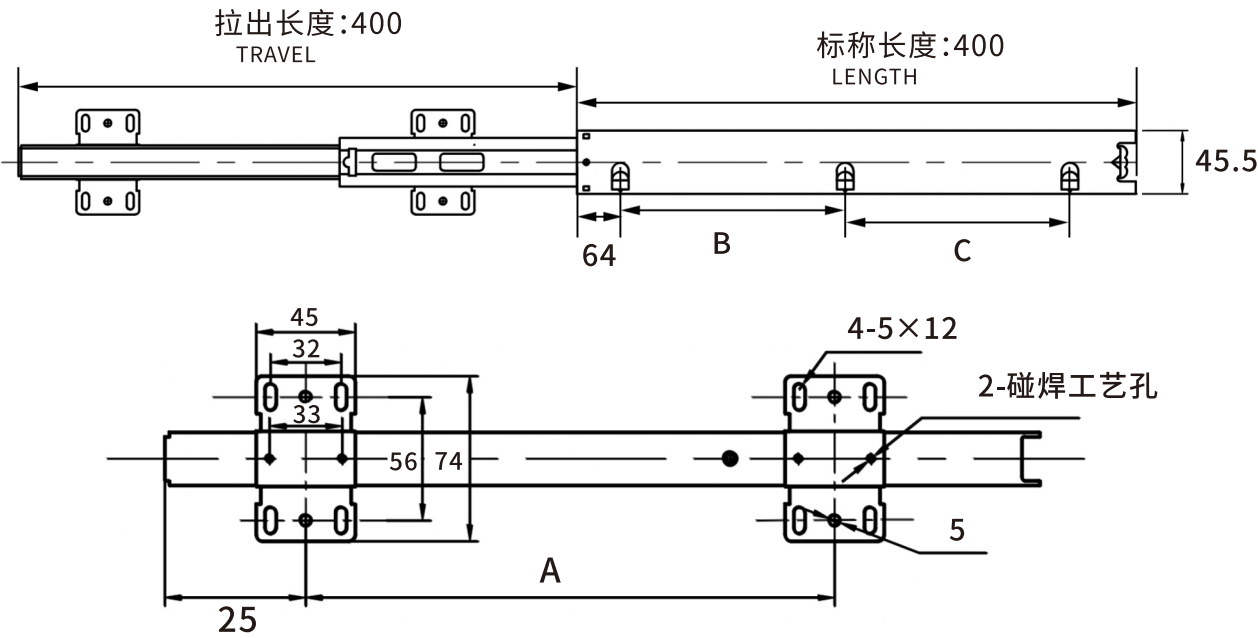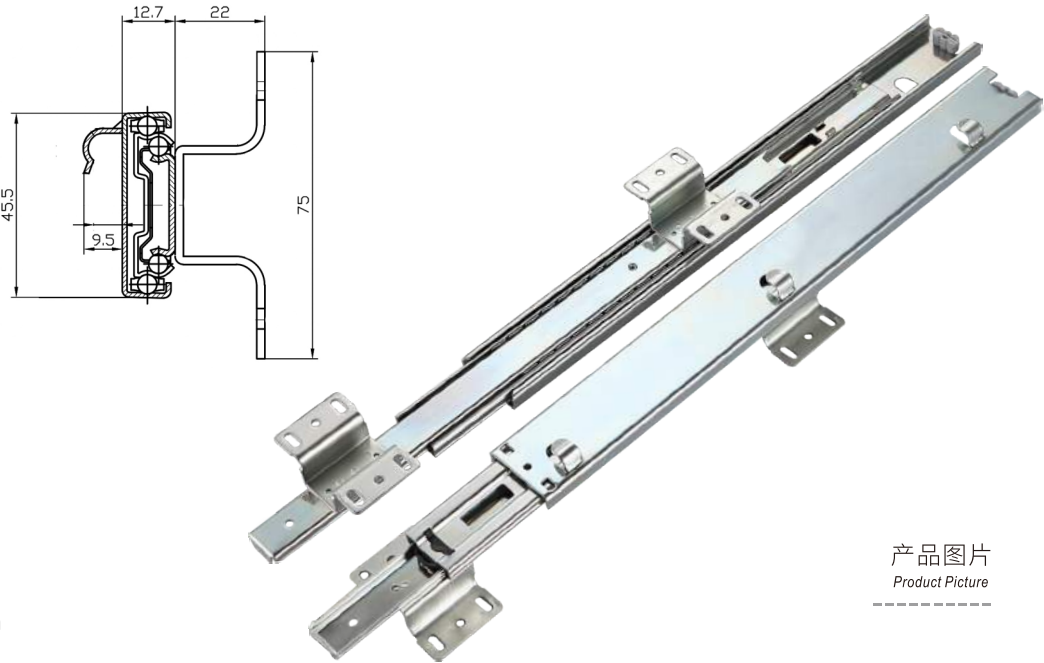

孔位示意图 Installation indication
图示Graphic:16"



订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES L1±0.5 A B C				套/箱 Sets/ctn
H1245-16"	400	400	397	260	161	161	20

底装调味篮拉篮滑轨 L1245

PULLING BASKET SLIDES

材质:冷轧钢
宽度:45.5mm
安装厚度:40.2mm
表面处理:镀锌
承重:45kg
规格长度:16"
安装形式:拉篮底部
材料厚度:1.2*1.2*1.5mm
产品重量:1.3kg/副

Material:cold-rolled steel
Slide width:45.5mm
slide thickness:40.2mm
Surface treatment:Zinc-Plated
max weight:45kg
length:16"
The installed forms:bottom mount
Material thickness:1.2*1.2*1.5mm
Product weight: 1.3kg/ pair

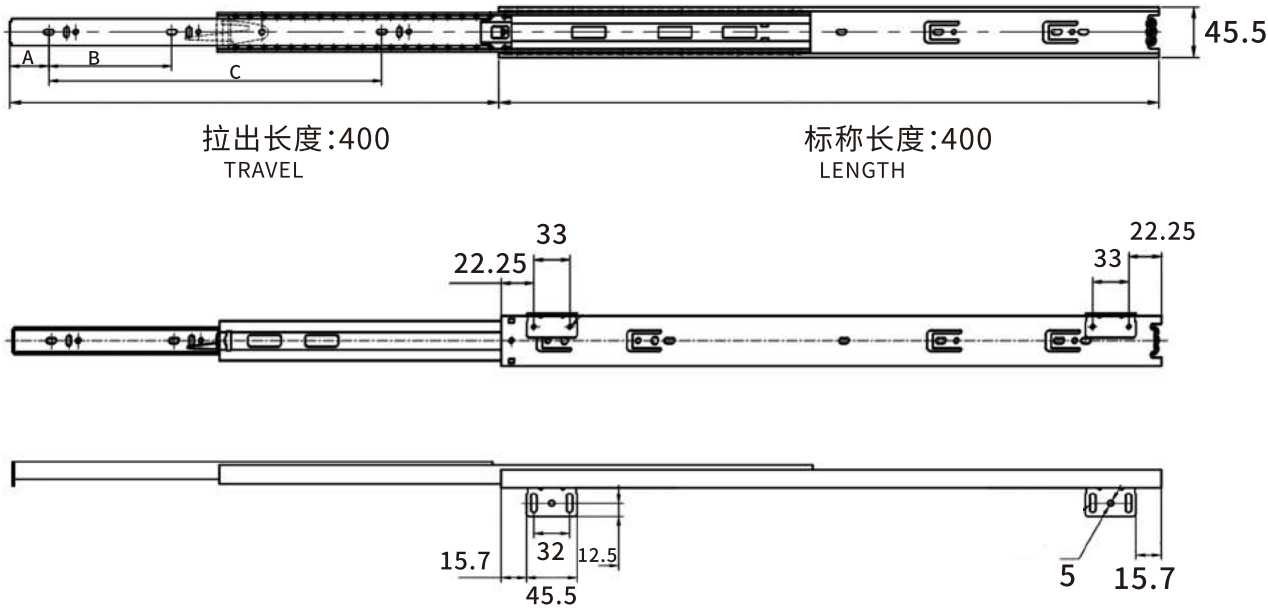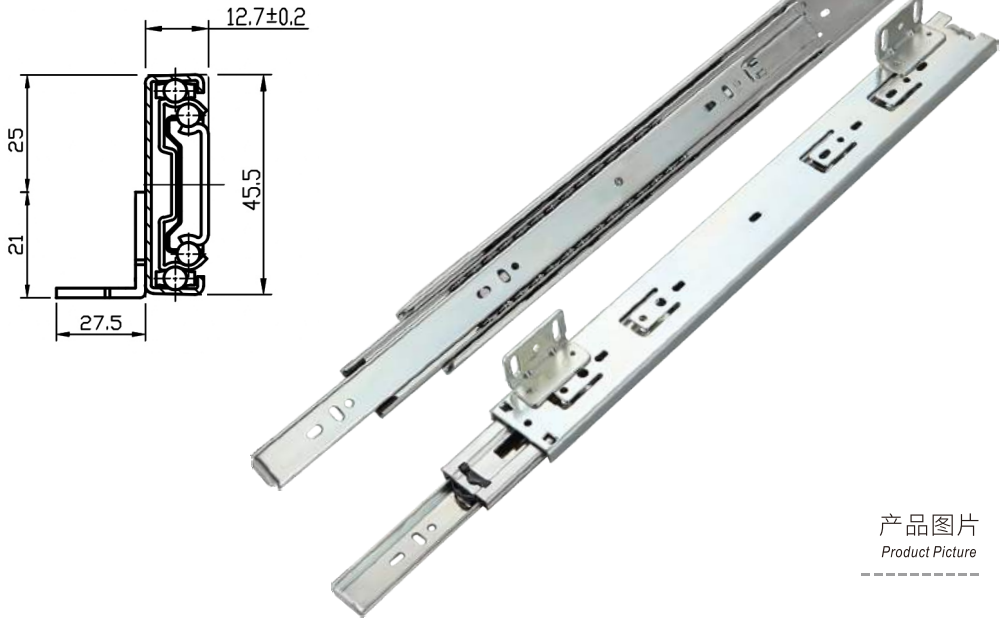

孔位示意图 Installation indication
图示Graphic:16"



订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES L1±0.5 A B C				套/箱 Sets/ctn
L1245-16"	400	400	396	35	128	320	20

侧装可调拉篮滑轨 M1245


PULLING BASKET SLIDES

材质:冷轧钢
宽度:45mm
安装厚度:33mm
表面处理:镀锌
承重:45kg
规格长度:15"
安装形式:拉篮侧面
材料厚度:1.2*1.2*1.5mm
产品重量:1.5kg/副

Material:cold-rolled steel
Slide width:45mm
slide thickness:33mm
Surface treatment:Zinc-Plated
max weight:45kg
length:15"
The installed forms:side mount
Material thickness:1.2*1.2*1.5mm
Product weight: 1.5kg/ pair

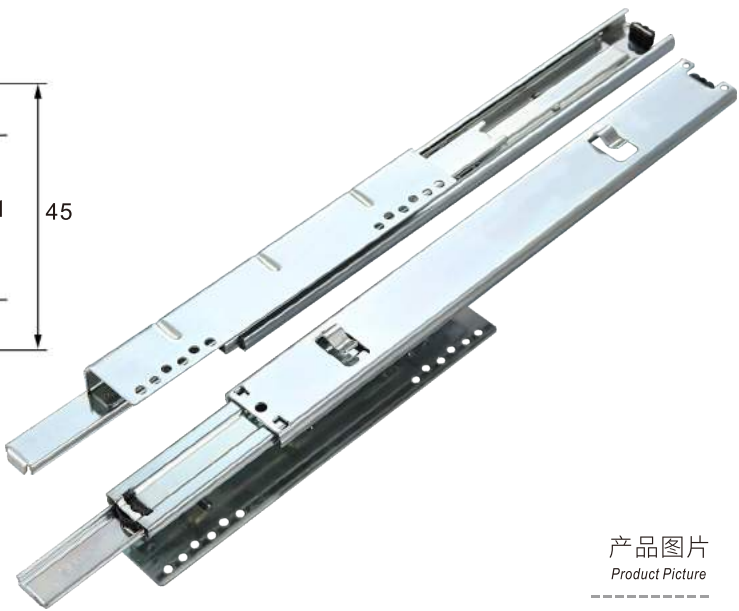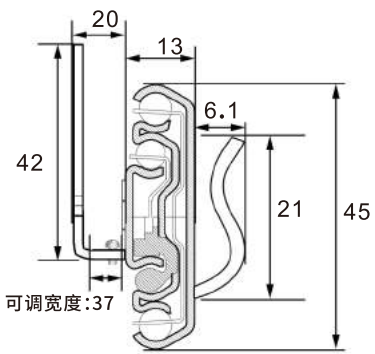

产品图片
Product Picture

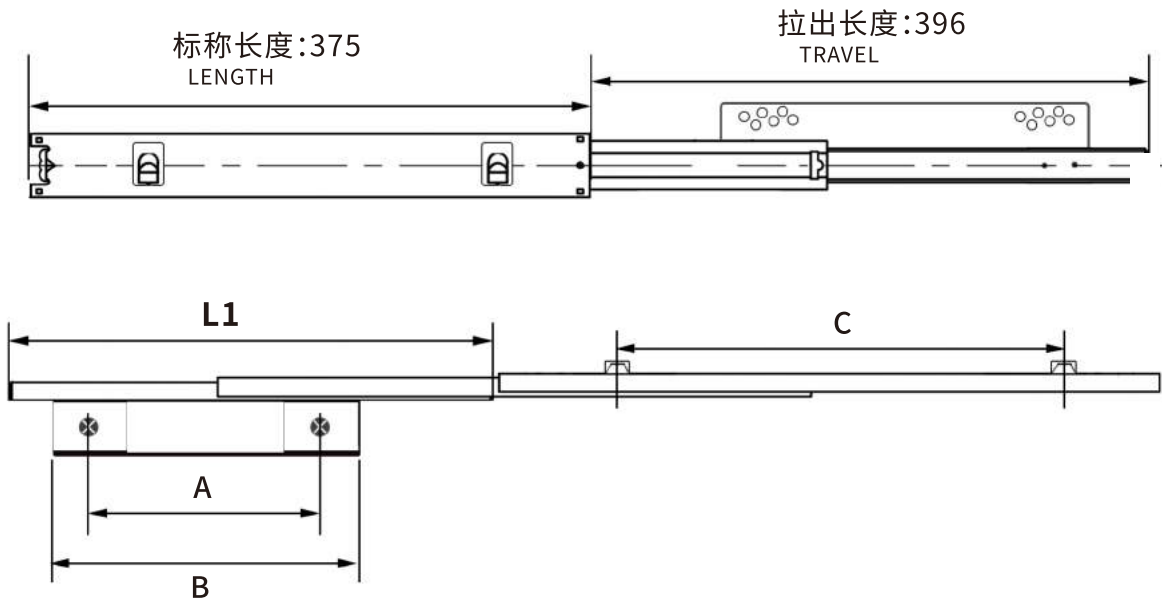

孔位示意图 Installation indication
图示Graphic:15"


1寸(inch)=25mm
单位(unit):mm
参考尺寸,以实物为准

订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES L1±0.5 A B C				套/箱 Sets/ctn
M1245-15"	396	375	375	210	250	223	10

骑马抽低邦(无杆) K9860

DOUBLE WALL DRAWER SYSTEM SERIES

应用实例 /Application examples

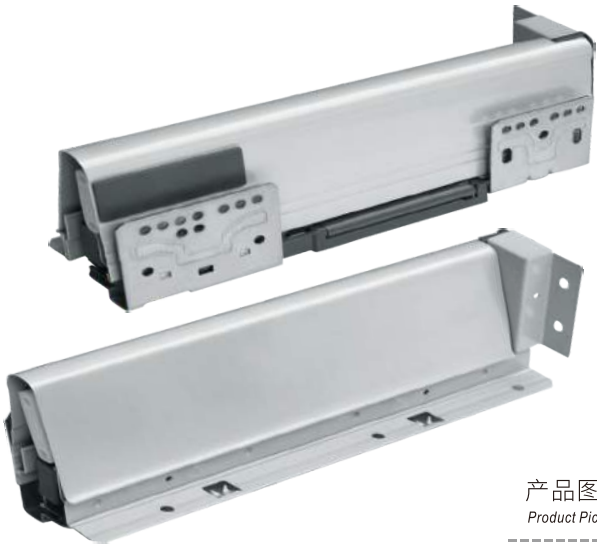


产品图片
Product Picture

奥力晟骑马抽产品优势:

- 一、导轨的中轨使用2.0厚料、导轨宽度为市面上最宽,导轨内有安装防撞胶,以保障承重力度和达到最佳的推拉效果,且中轨齿轮壮实。
- 二、通过SGS八万次40KG推拉测试无损坏,侧板高86mm、加杆高度至160mm。
- 三、宽度可自由设计、自动误差调节,快速安装拆卸、三维面板调节、可选用木背板或钢背板的时尚个性化设计。

基本组件 /Basic components

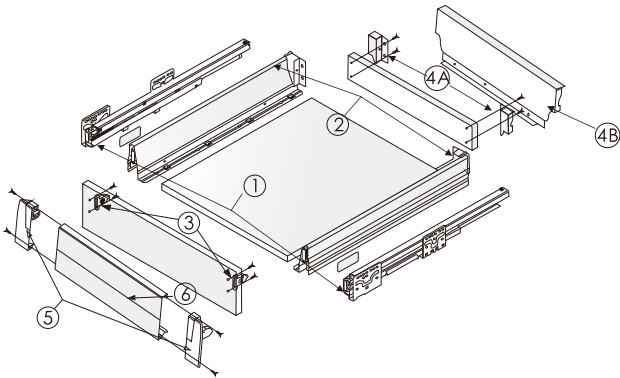

	组成部分	Components
1	箱体轨道左/右	cabinet/rail(left/right)
2a,2b	抽屉和装饰盖左/右	drawer sides and decorative covers(left/right)
3	前接码	front connectors
4A	后接码左/右	rear connectors(left/right)
4B	钢背板	steel backplanes
5	内抽前接码左/右	panels of front connectors(left/right)
6	内抽面板	panels of internal drawers

订购信息 /Ordering information

型号 Model	基本长度 Basic length	内部可用长度 Internally usable length	抽屉最小安装长度 Min. Installation length of drawer	最小安装高度 Min. Installation height of drawer	包装 Paiking:
K9860-270	270mm	244mm	280mm	105mm	6 SET/CTN
K9860-300	300mm	274mm	305mm	105mm	6 SET/CTN
K9860-350	350mm	324mm	355mm	105mm	6 SET/CTN
K9860-400	400mm	374mm	405mm	105mm	6 SET/CTN
K9860-450	450mm	424mm	455mm	105mm	6 SET/CTN
K9860-500	500mm	474mm	505mm	105mm	6 SET/CTN
K9860-550	550mm	524mm	555mm	105mm	6 SET/CTN

骑马抽高邦(带杆) K9862

DOUBLE WALL DRAWER SYSTEM SERIES

应用实例 /Application examples




产品图片
Product Picture

奥力晟骑马抽产品优势：

- 一、导轨的中轨使用2.0厚料、导轨宽度为市面上最宽，导轨内有安装防撞胶，以保障承重力度和达到最佳的推拉效果，且中轨齿轮壮实。
- 二、通过SGS八万次40KG推拉测试无损坏，侧板高86mm、加杆高度至160mm。
- 三、宽度可自由设计、自动误差调节，快速安装拆卸、三维面板调节、可选用木背板或钢背板的时尚个性化设计。

基本组件 /Basic components

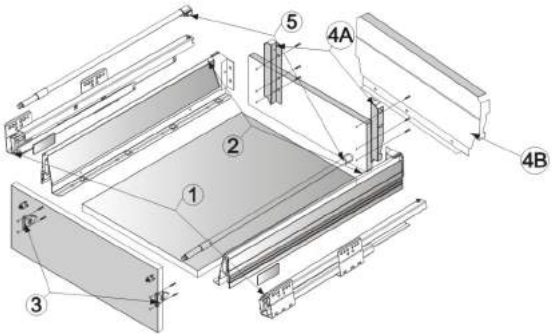

	组成部分	Components
1	箱体轨道左/右	cabinet/rail(left/right)
2	抽屉和装饰盖左/右	drawers sides and decorative covers(left/right)
3	前接码左/右	front connectors(left/right)
4A	后接码左/右	rear connectors(left/right)
4B	钢背板	steel backplanes
5	拉杆左/右	Drawing(left/right)


订购信息 /Ordering information

型号 Model	基本长度 Basic length	内部可用长度 Internally usable length	抽屉最小安装长度 Min. Installation length of drawer	最小安装高度 Min. Installation height of drawer	包装 Paiking:
K9862-270	270mm	244mm	280mm	105mm	6 SET/CTN
K9862-300	300mm	274mm	305mm	105mm	6 SET/CTN
K9862-350	350mm	324mm	355mm	105mm	6 SET/CTN
K9862-400	400mm	374mm	405mm	105mm	6 SET/CTN
K9862-450	450mm	424mm	455mm	105mm	6 SET/CTN
K9862-500	500mm	474mm	505mm	105mm	6 SET/CTN
K9862-550	550mm	524mm	555mm	105mm	6 SET/CTN


五寸两节滑轨 W3510

BALL BEARING SLIDE SERIES

材质:冷轧钢
宽度:35mm
安装厚度:10mm
表面处理:镀锌
规格长度:5"
安装形式:抽屉侧面
材料厚度:1.0*1.0mm
产品重量:190g/副
Material:cold-rolled steel
Slide width:35mm
slide thickness:10mm
Surface treatment:Zinc-Plated
length:5"
The installed forms:side mount
Material thickness:1.0*1.0mm
Product weight: 190g/ pair

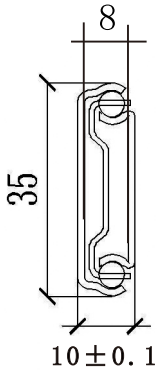

产品图片
Product Picture

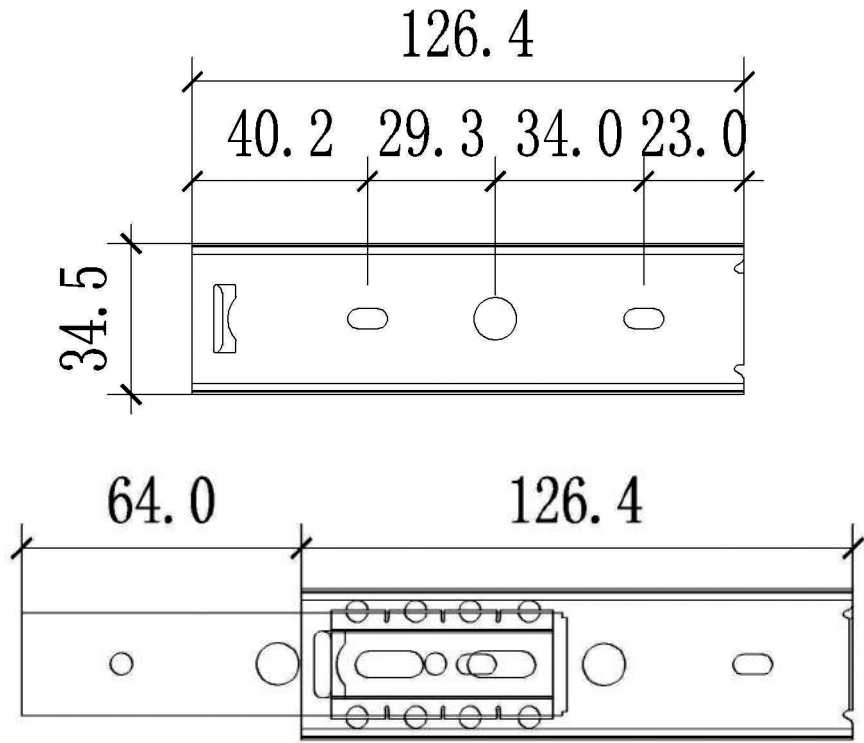

孔位示意图 Installation indication 图示Graphic

订货编号 Model	拉出长度±2 TRAVEL	标称长度±0.5 LENGTH	孔位及相关尺寸 HOLES AND OTHER SIZES	套/箱 Sets/ctn
W3510-5"	190.4	126.4	图示	100

1寸(inch)=25.4mm
单位(unit):mm
参考尺寸，以实物为准