

GK-05


CONSTRUCTION MANUAL

DOCYKE




安装时间/Time to build: 8 hours
最大载重/Max weight: 50Kg


A

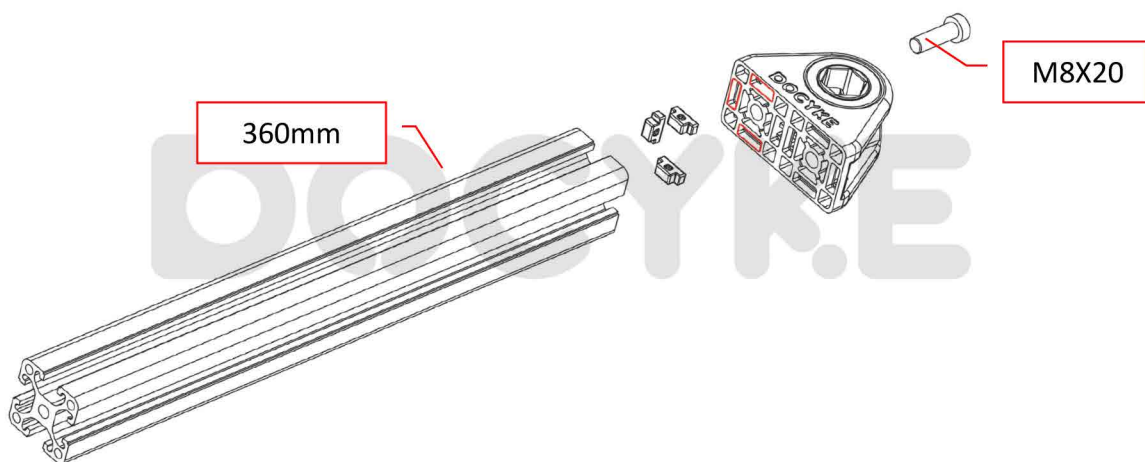


B

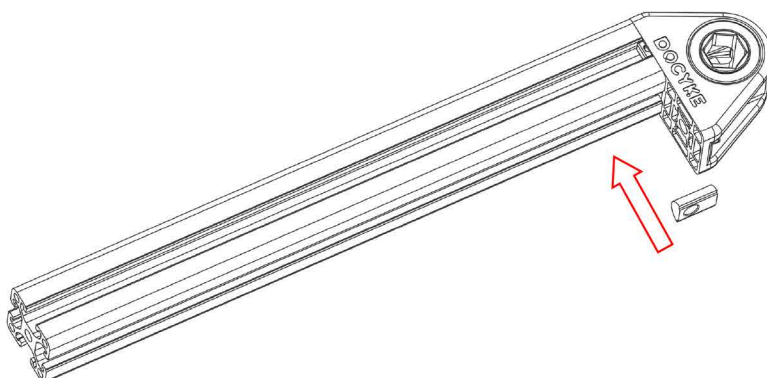


C

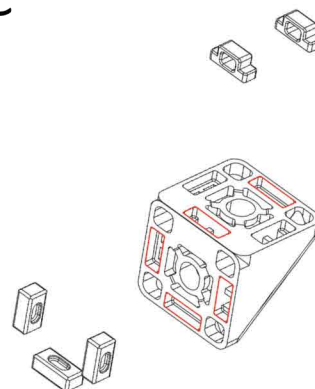



D

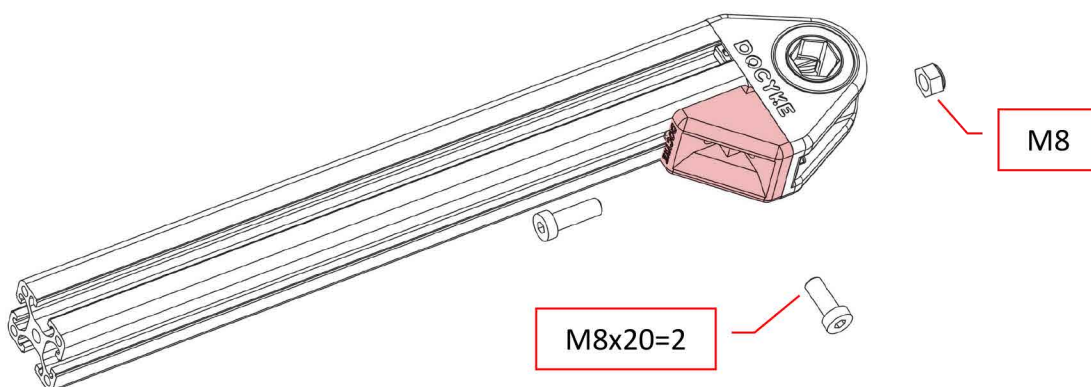


E



X2

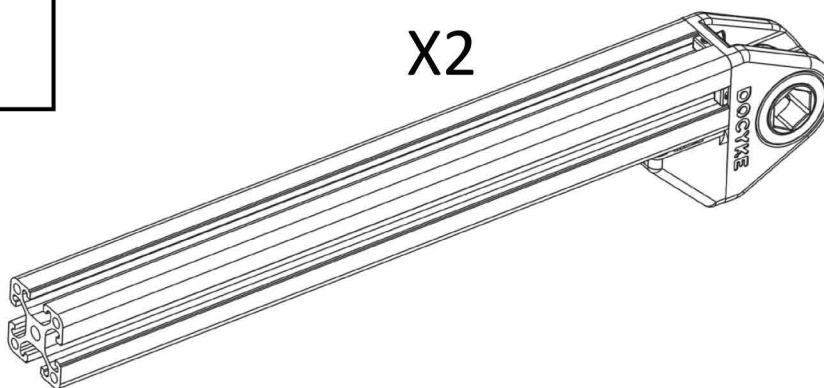

M8x20

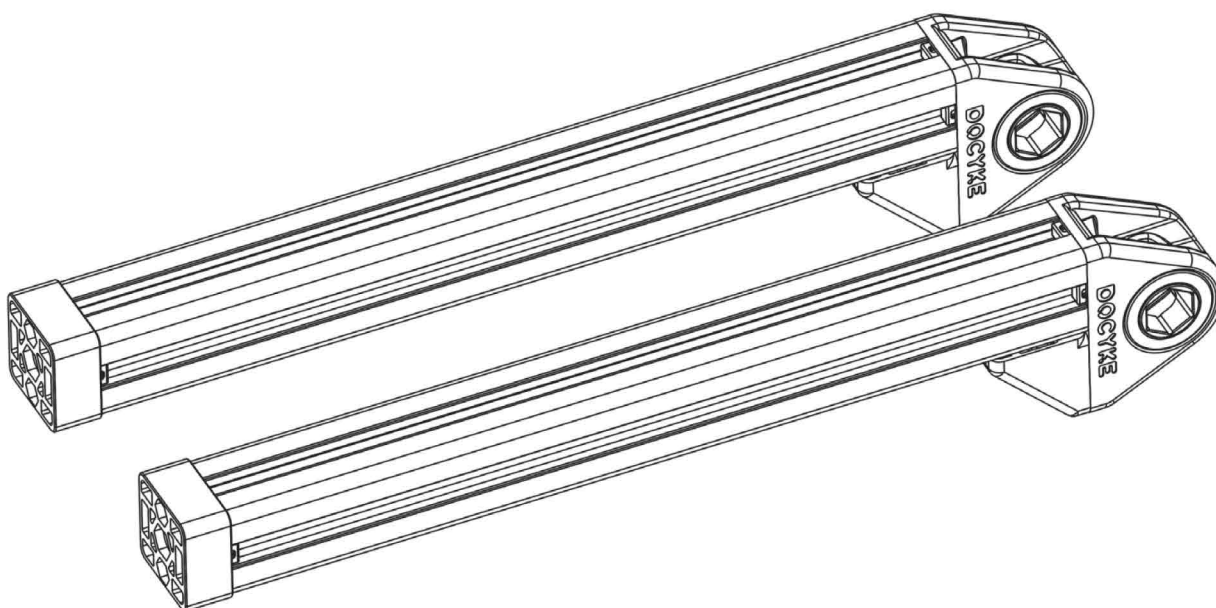


2


装配时螺钉必须拧紧。
Tighten the bolts with full force to prevent them coming loose.

A

M6=2

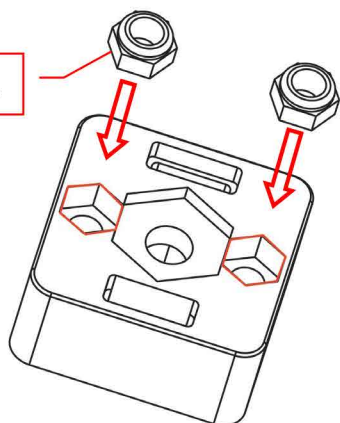


B

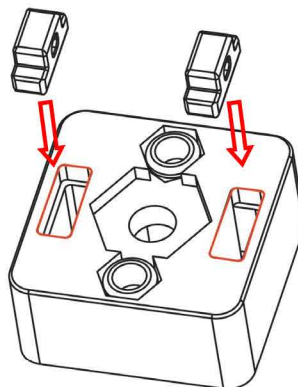

C

X2




D

X2



M8x20=2

320mm


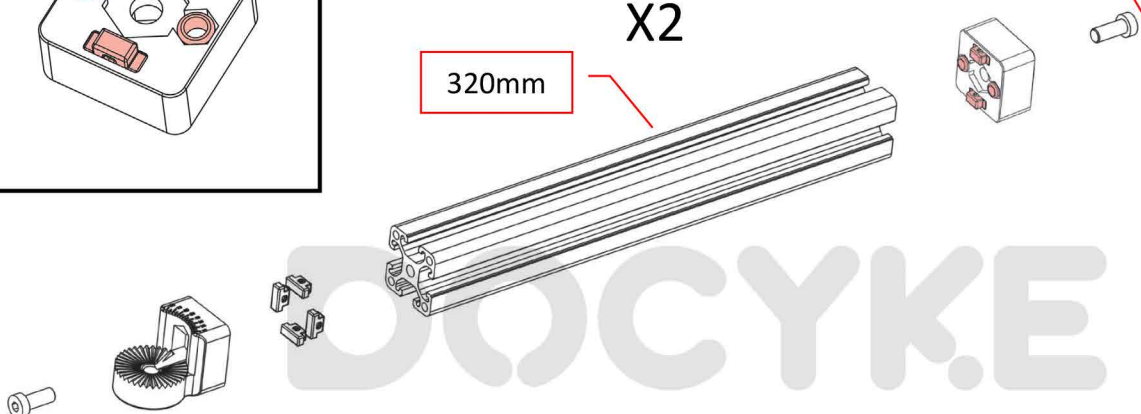


产品中一共包含两种定位块，它是至关重要的部件，请仔细分辨，避免漏装或误装。


The positioning blocks are some of the smallest parts but they also some of the most important. Putting them in the right place is a key of the DOCYKE.

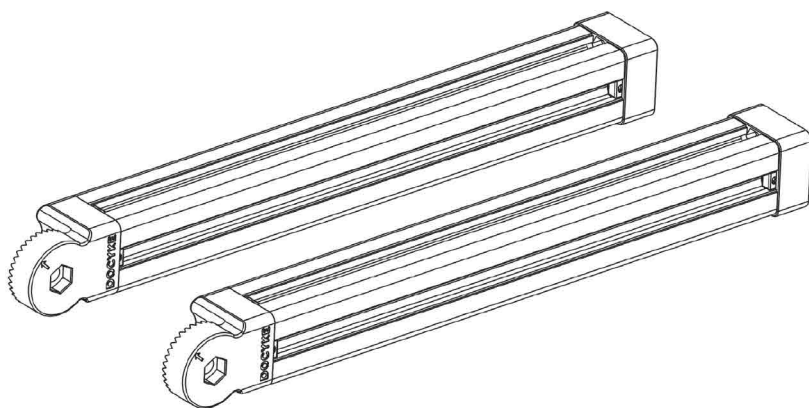



A

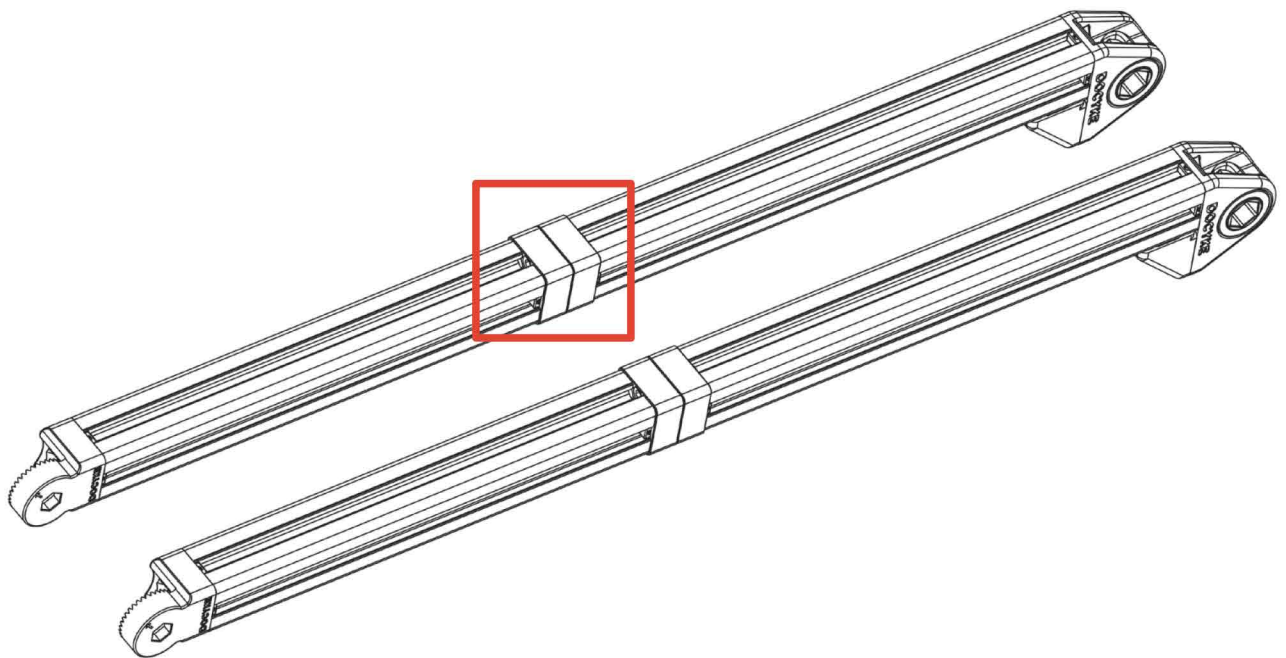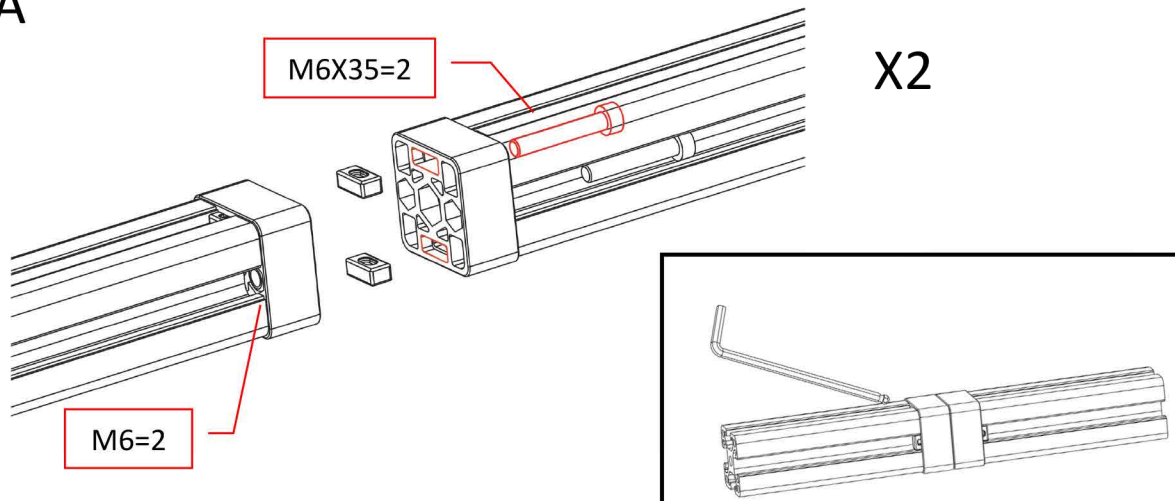


A

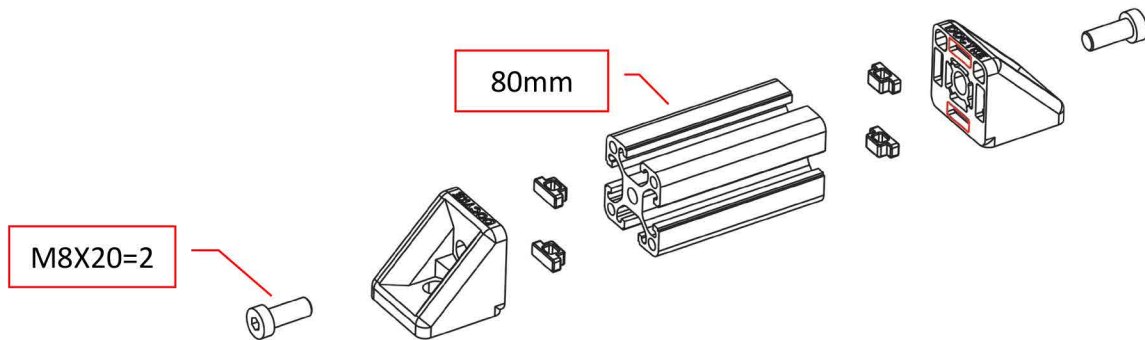


B

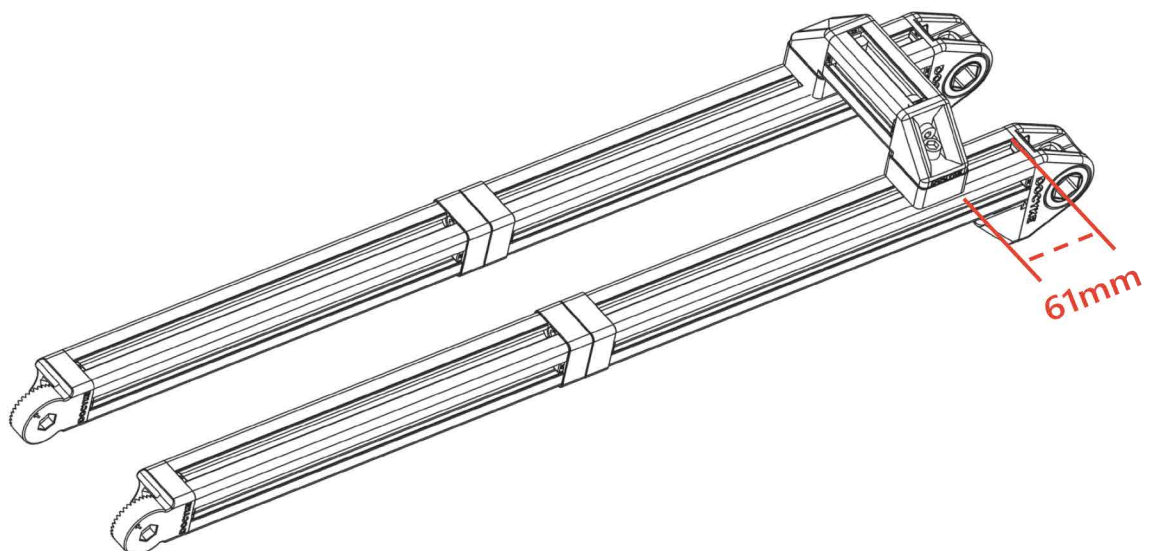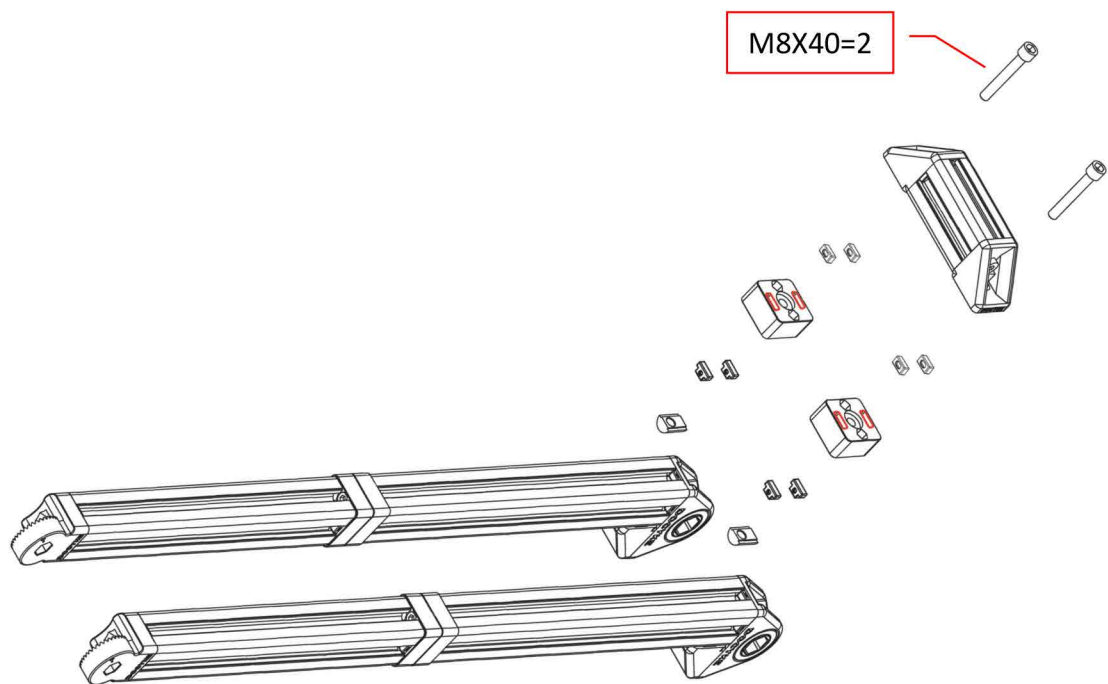

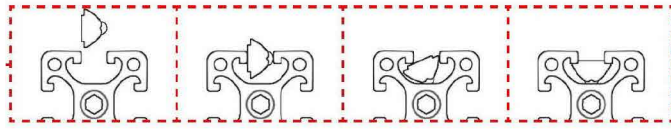


A


M6=2

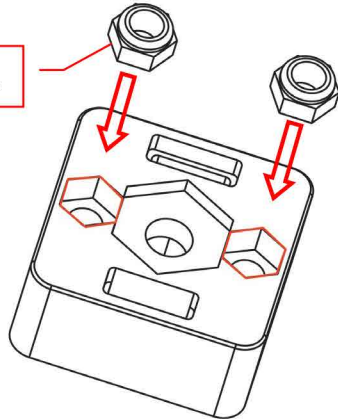

B

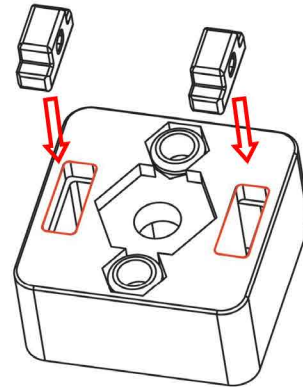


C



D

M8x20=2


200mm

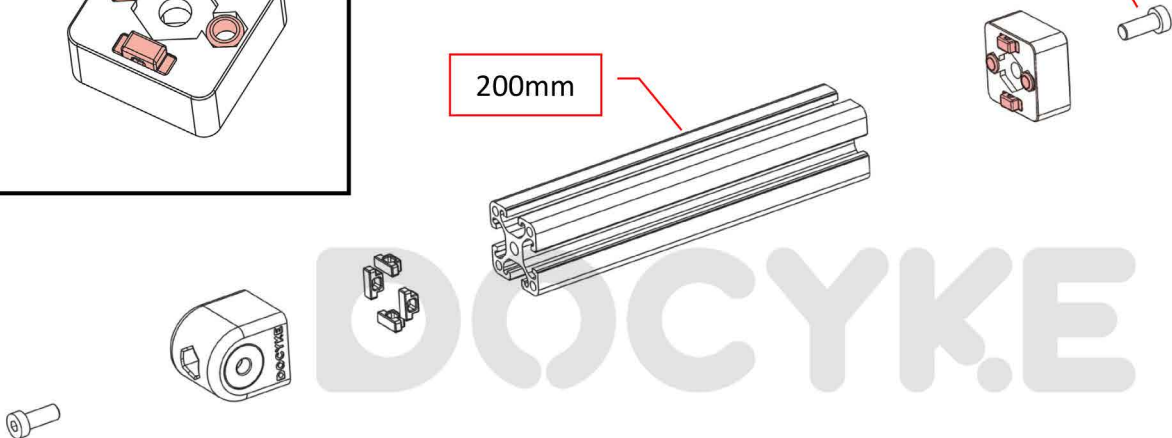


E

M8x20=2

200mm

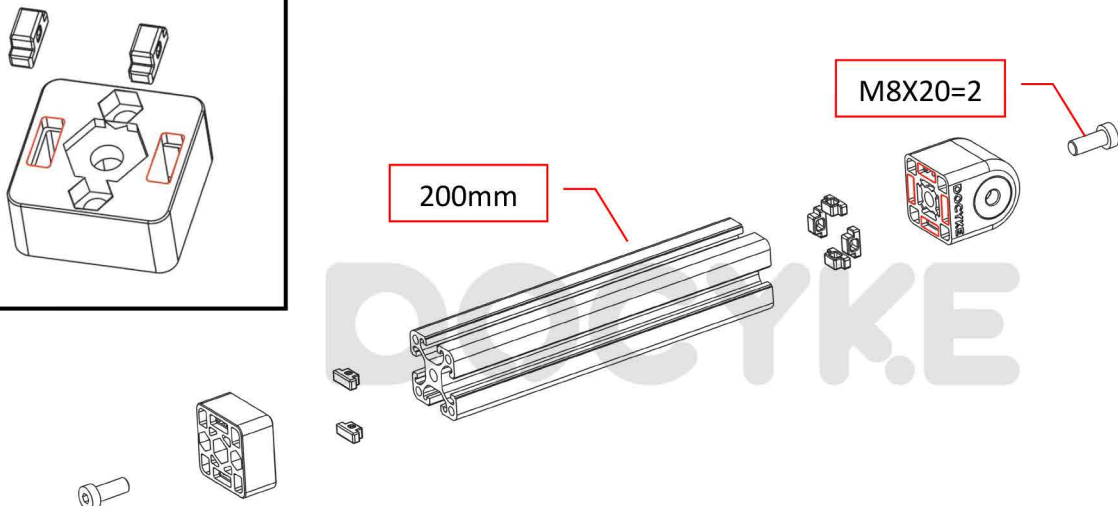



F

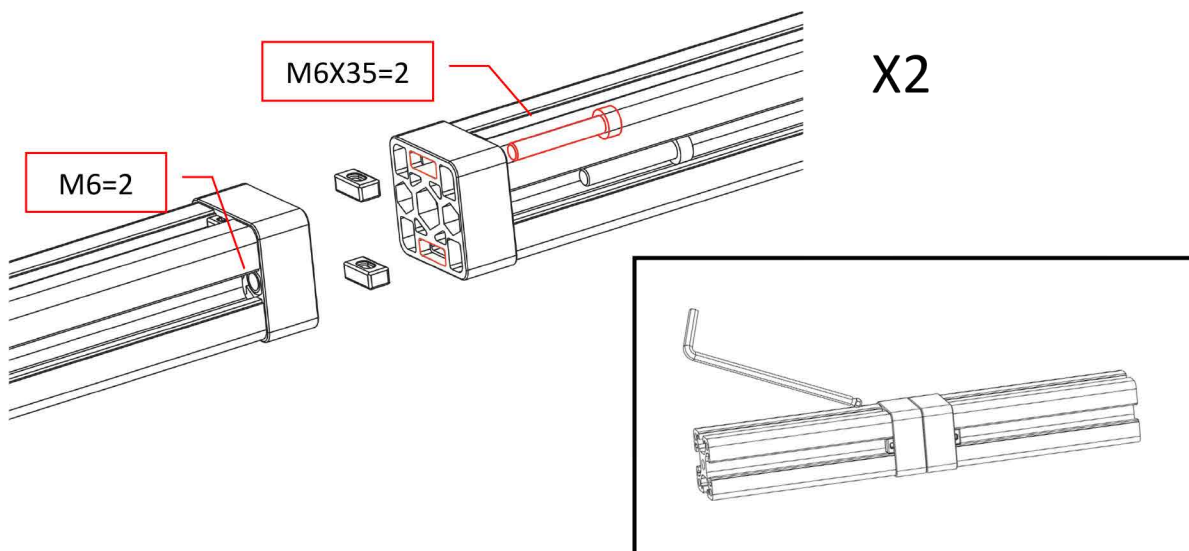



6

Screws are required to use different lengths in different locations, so be sure to follow the instruction manual and use the Hex wrench handle to tighten the screws.



A

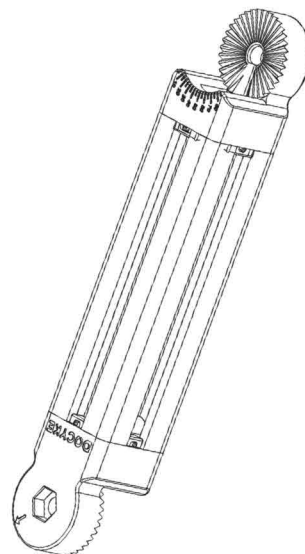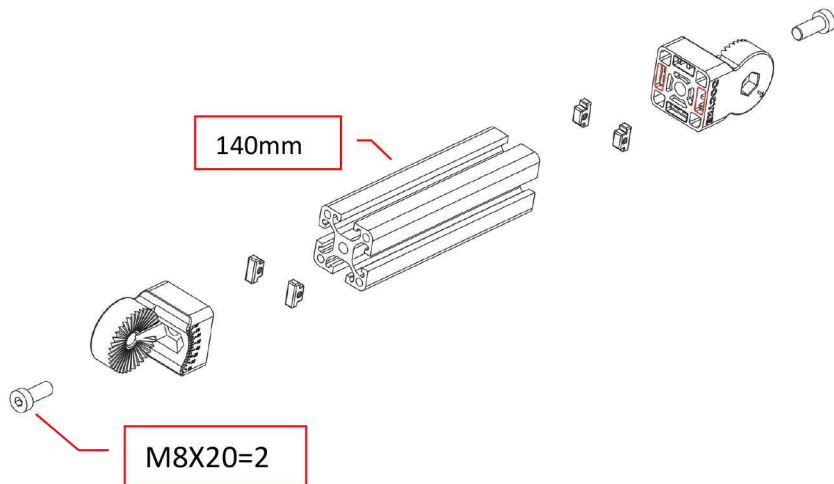



B

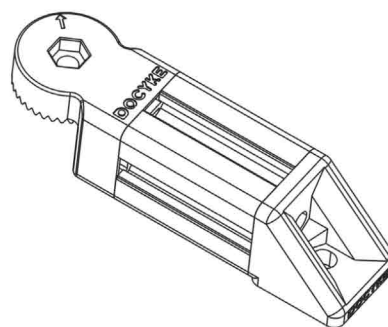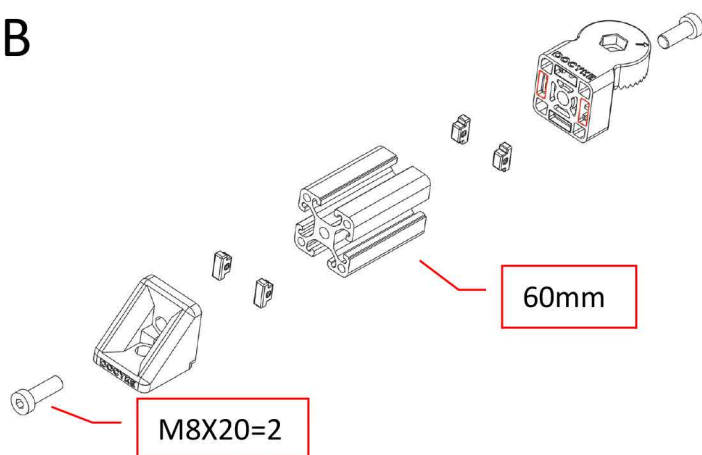


C

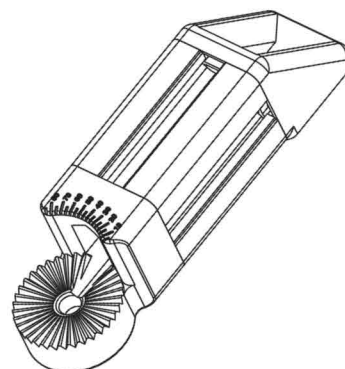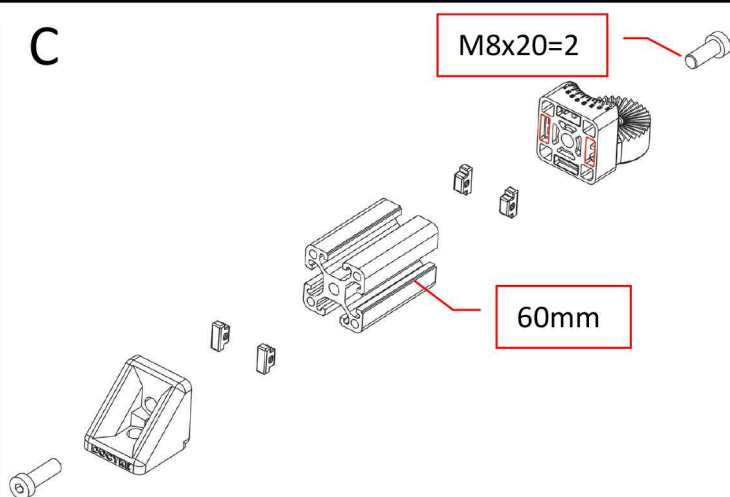


D

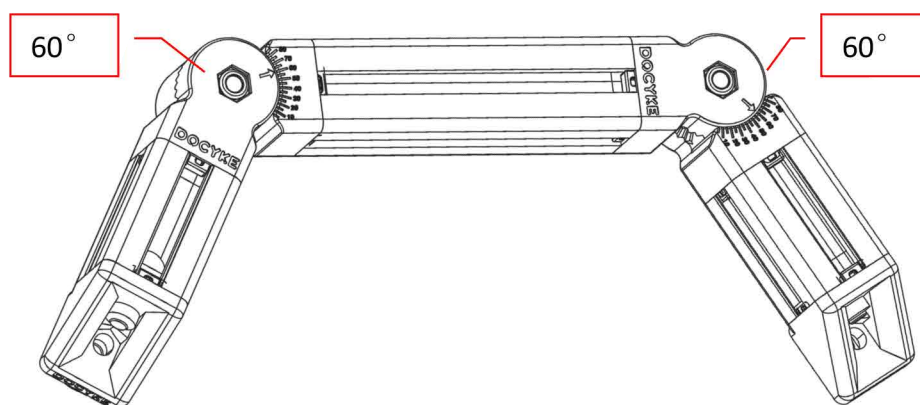
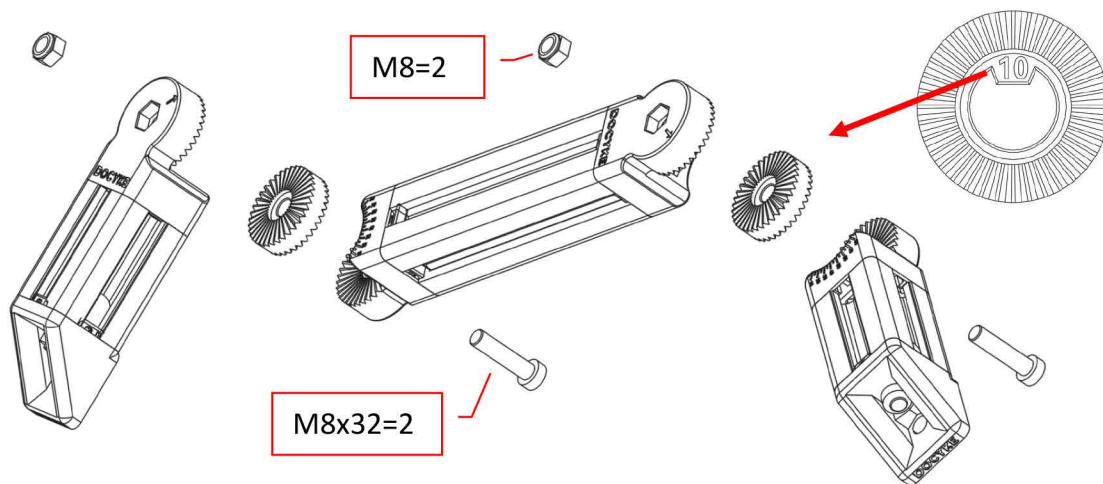


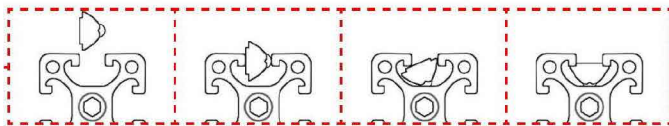

A


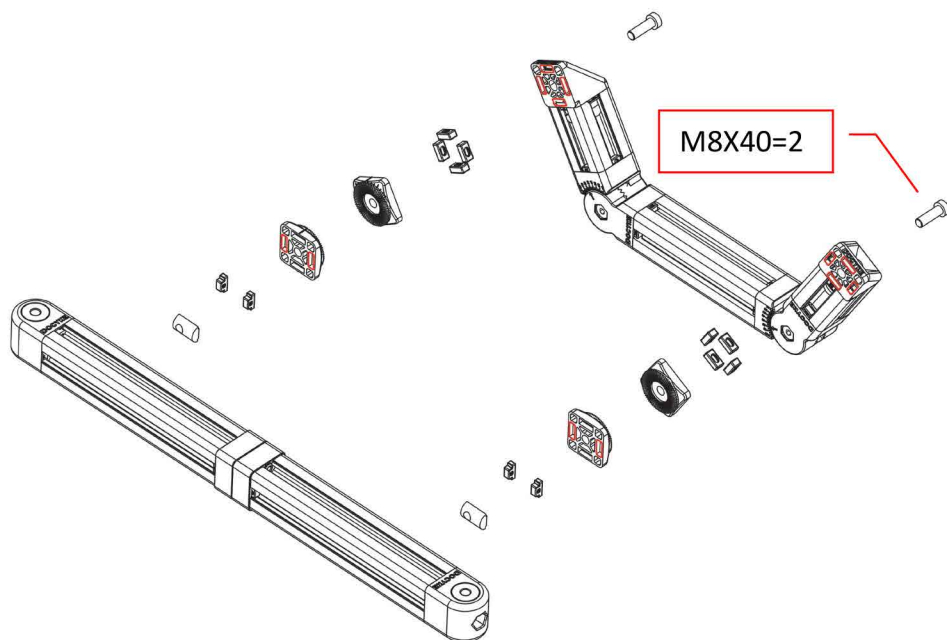



B

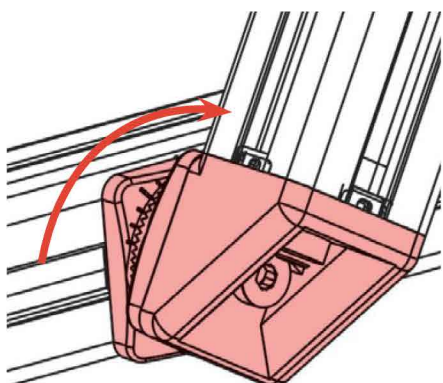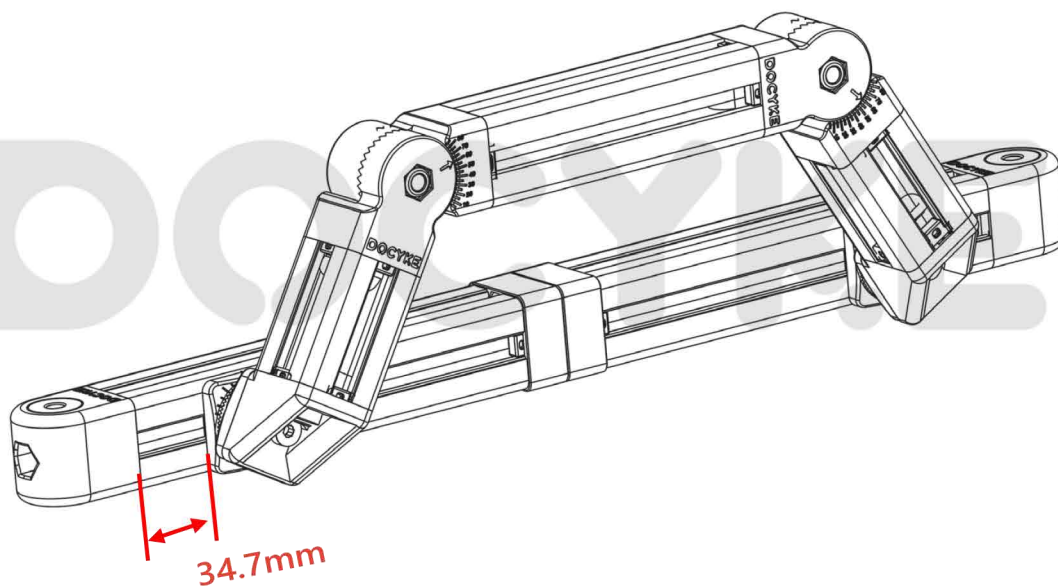


转 6 格, 共 30° (每个齿 5°)。
6x knurled increments (each increment is 5°).

A

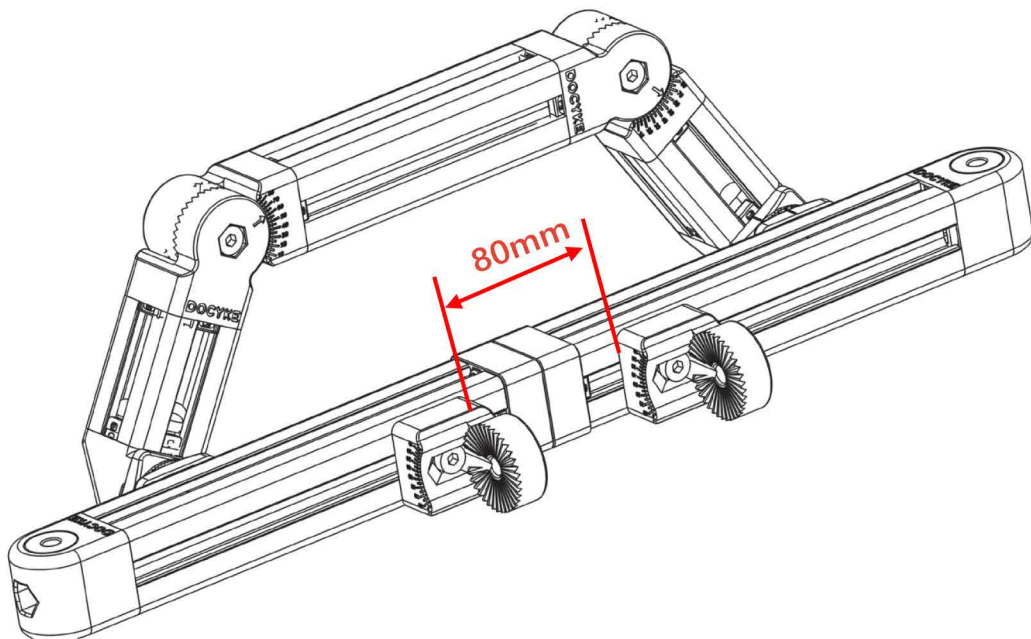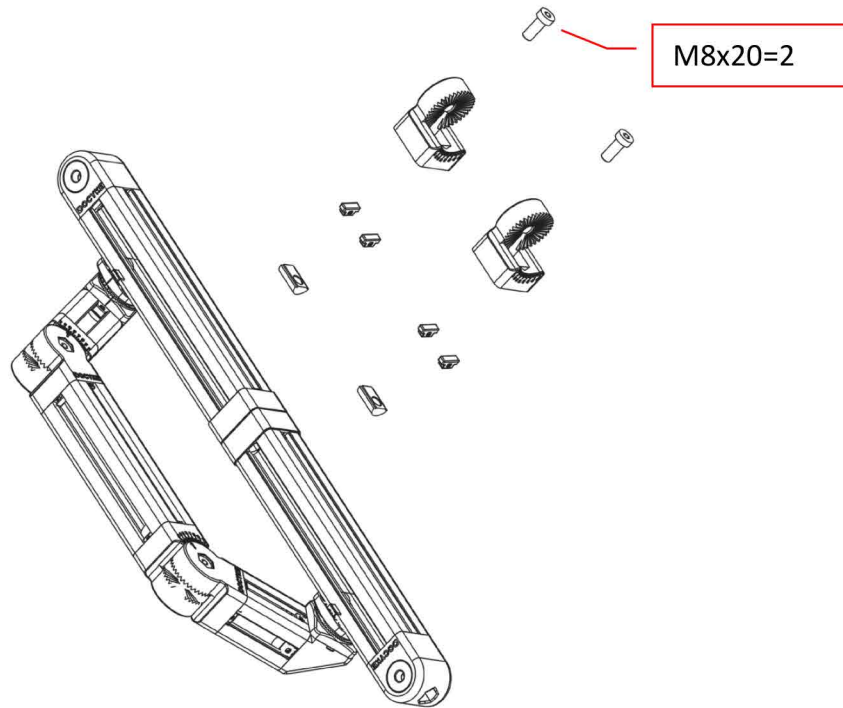

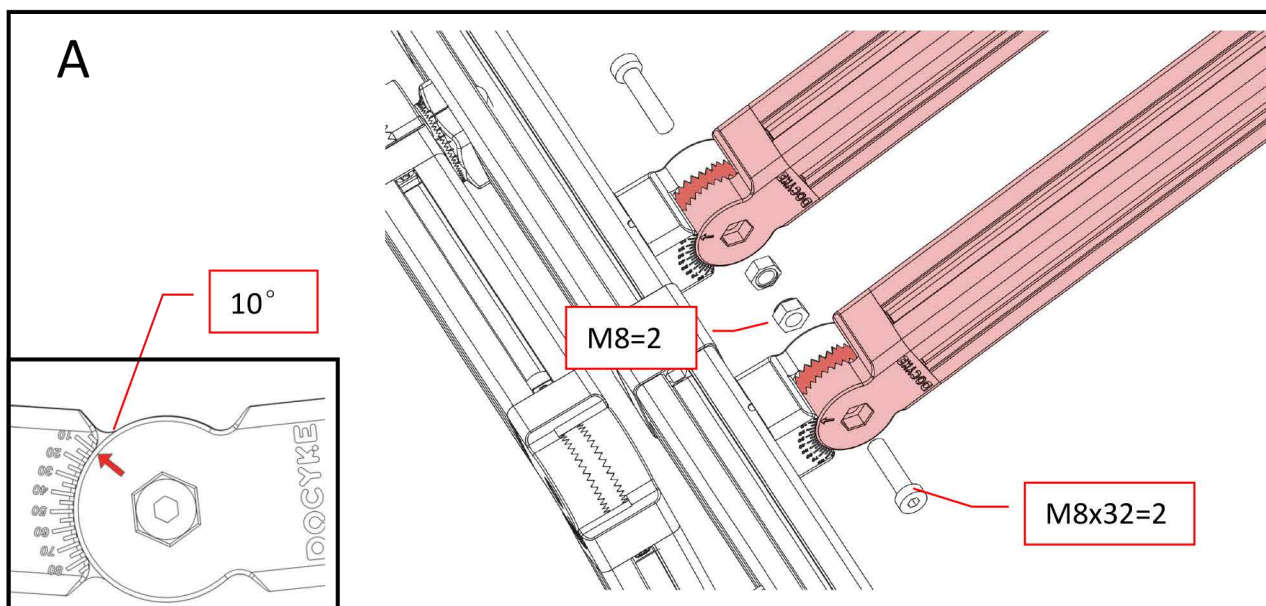



角度片的齿型分 2 种，
 一种可安装成 5°、15°、25°、...，等
 一种可安装成 10°、20°、30°、...，等

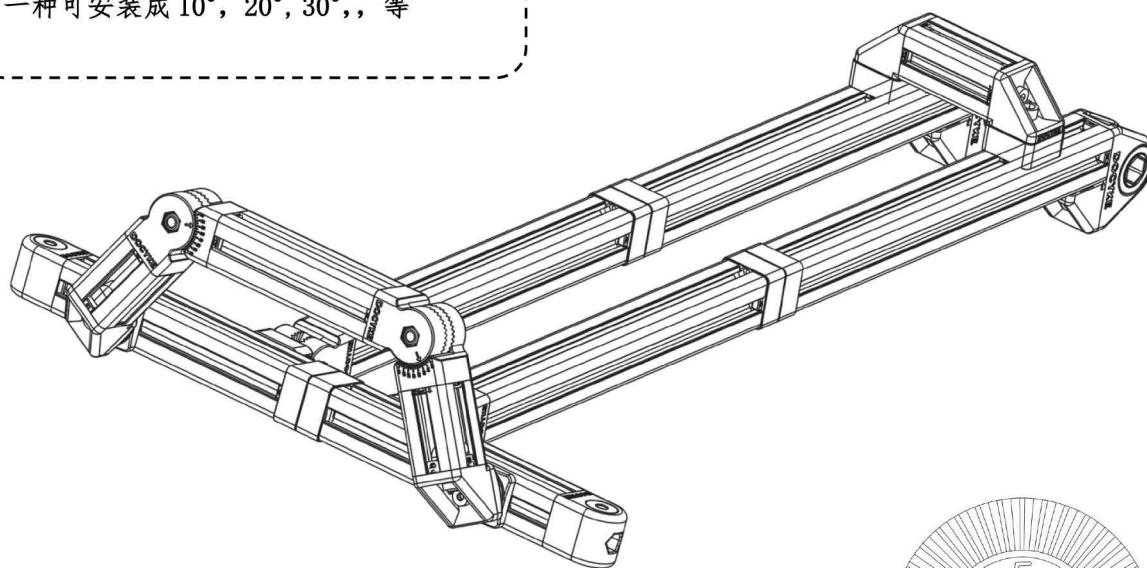


There are two types of knurled discs.

One can be installed in 5°, 15°, 25°,...,etc.


The other can be installed in 10°, 20°, 30°, etc.




A

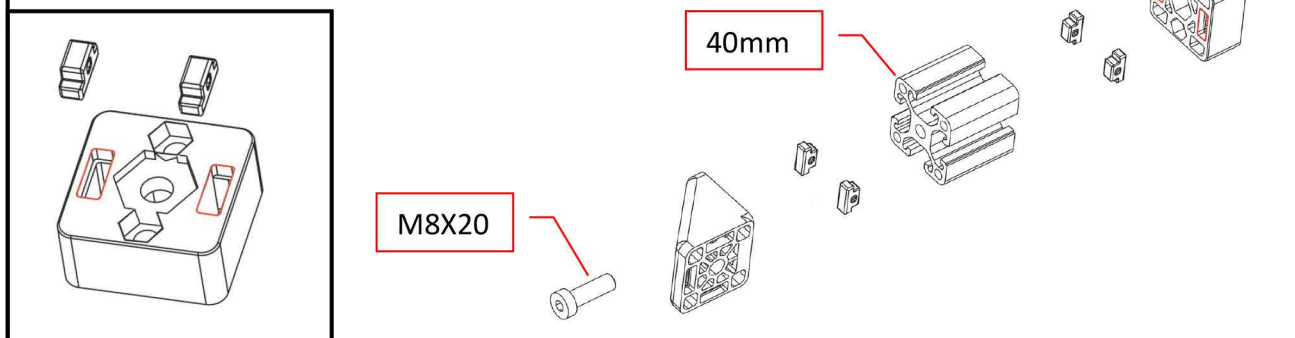


B

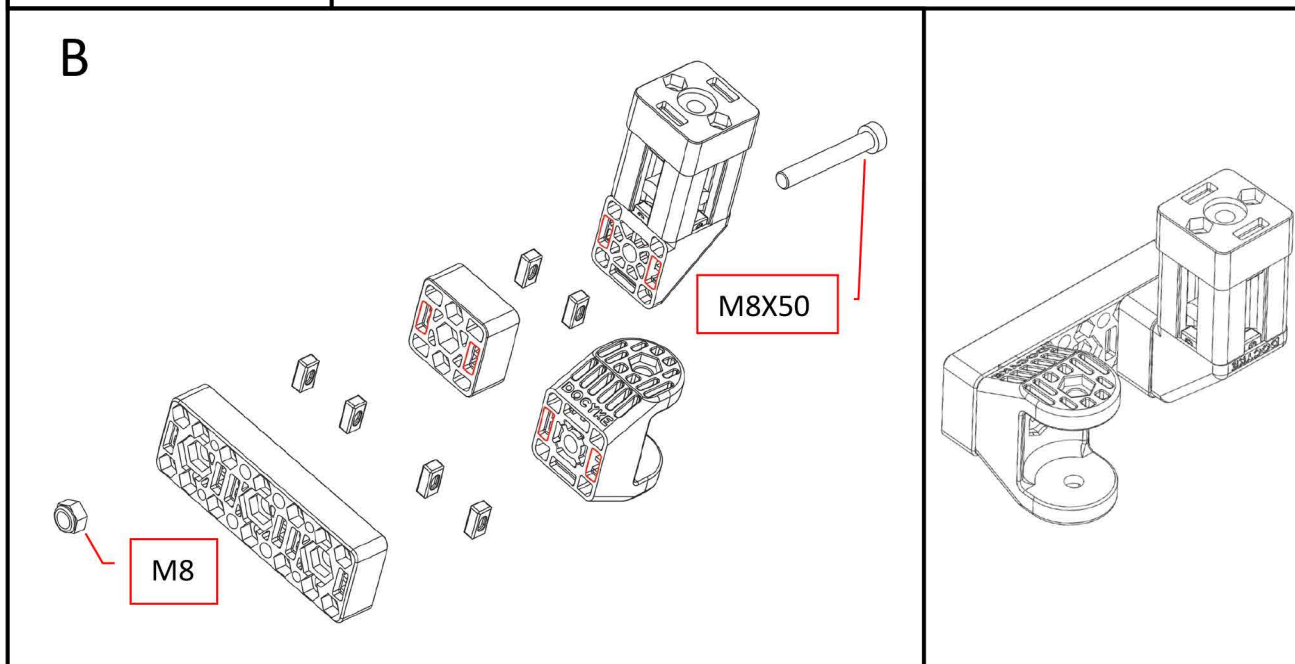

C

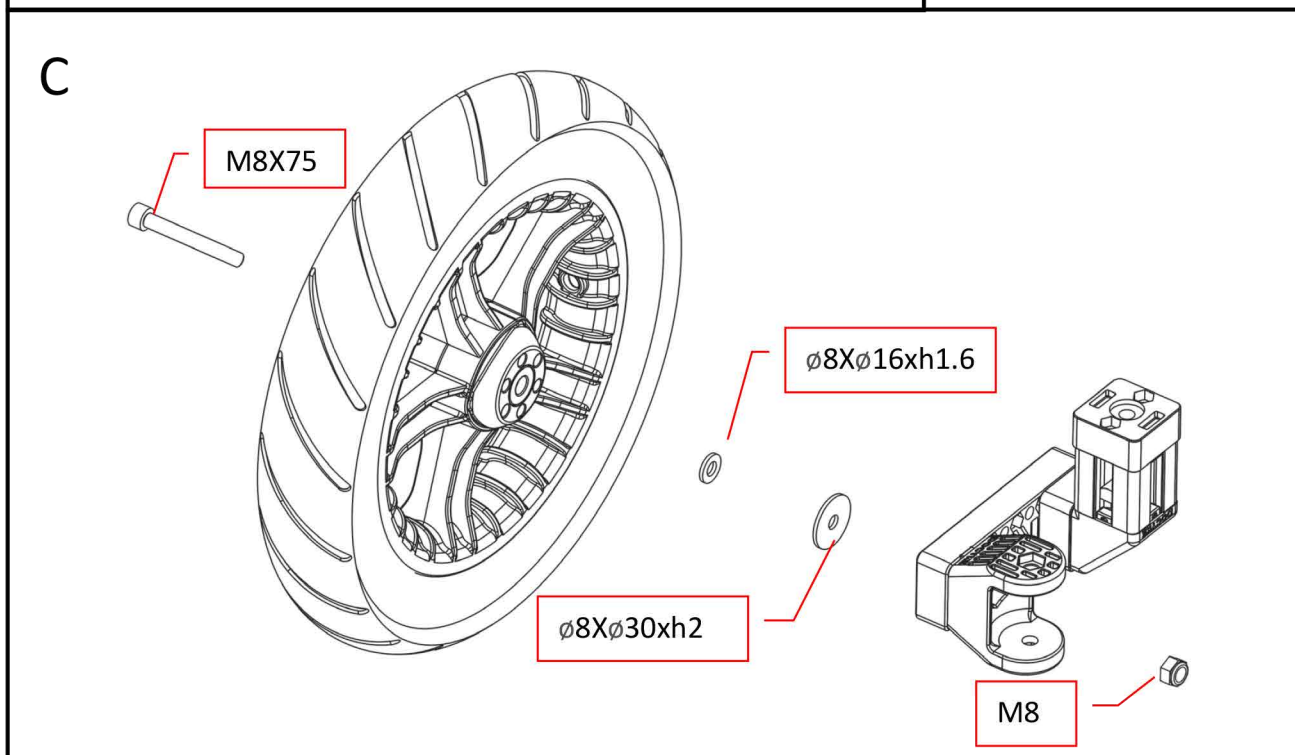


重复步骤，组装另一半。
Assemble 2 identical components.


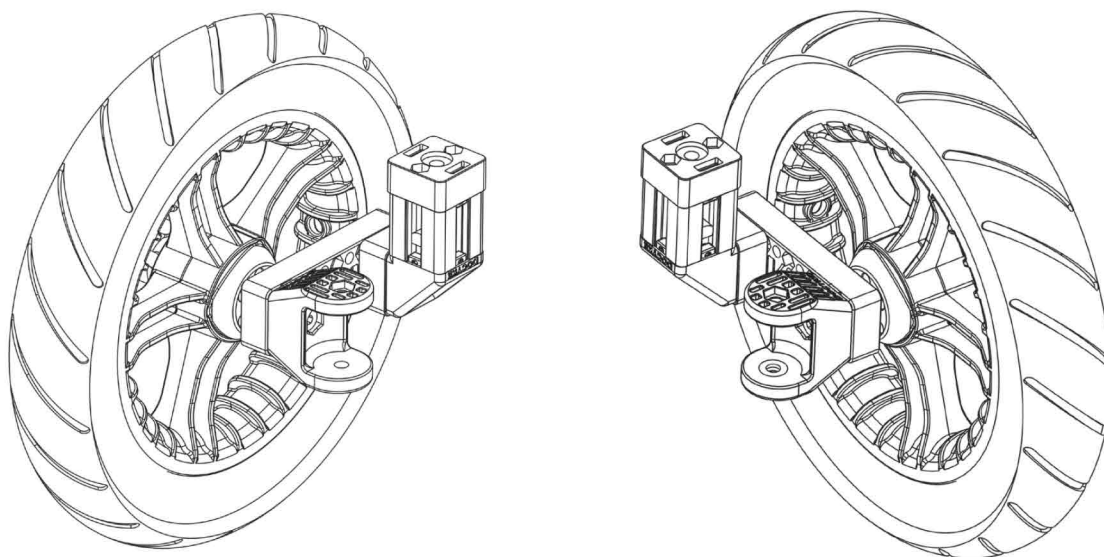


11


A

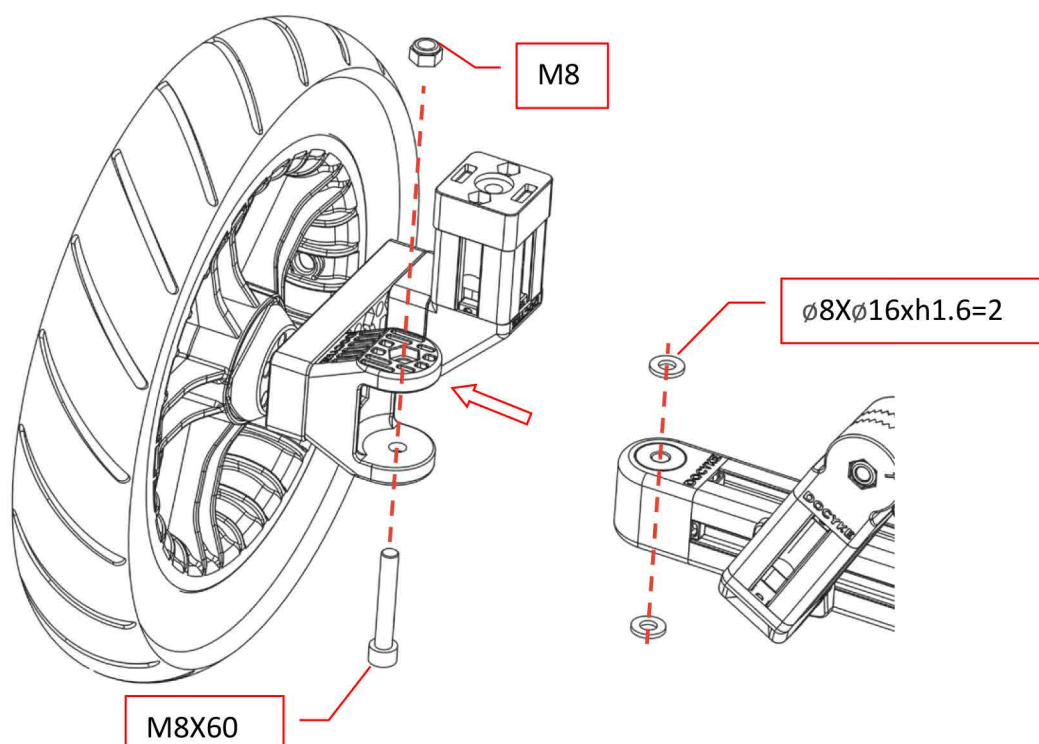



B

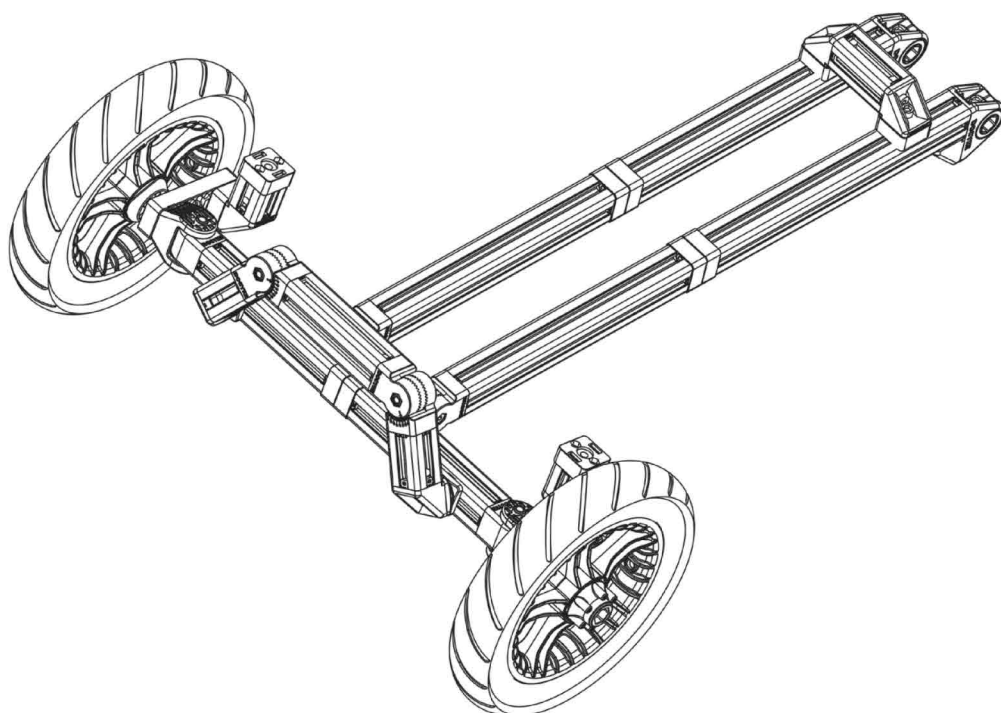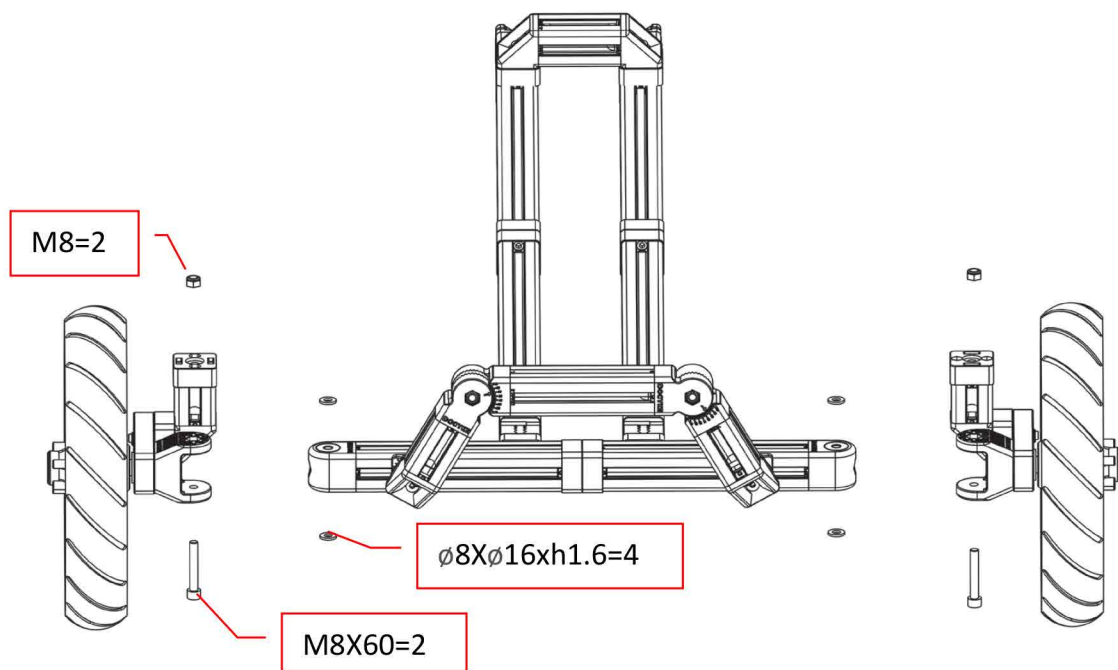



A

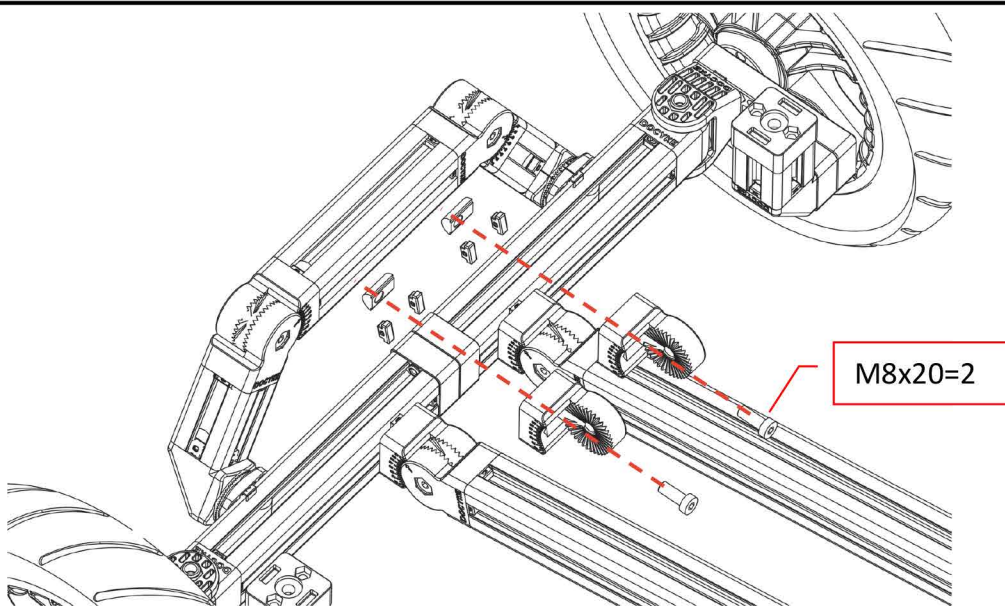



B

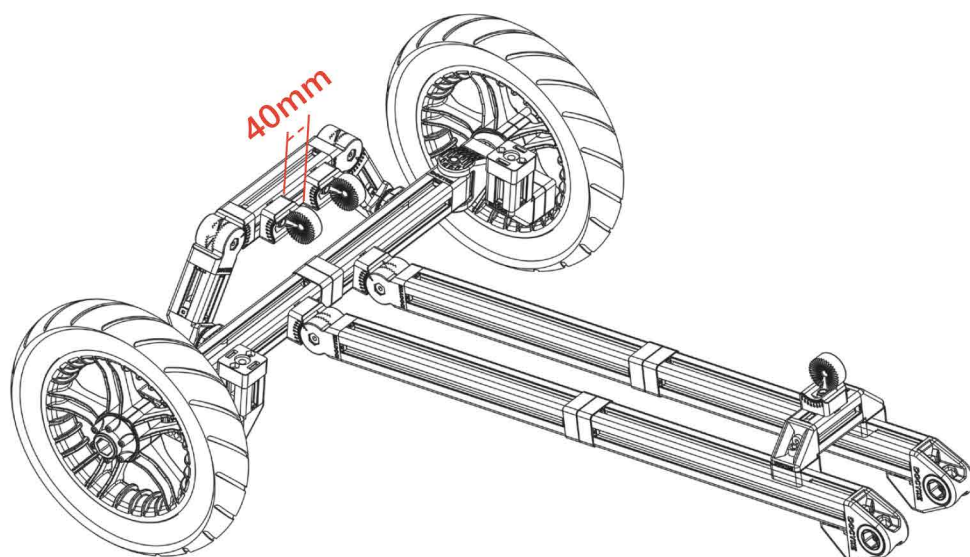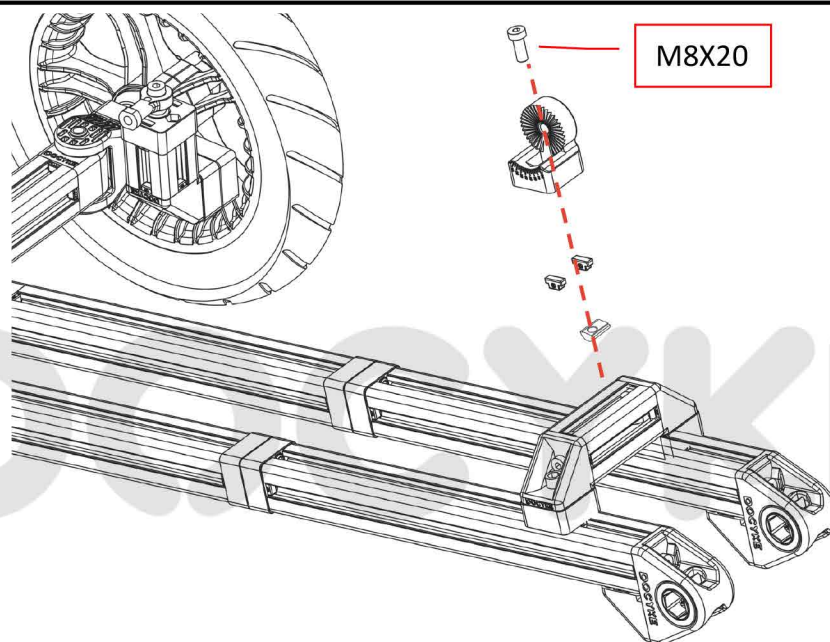



A

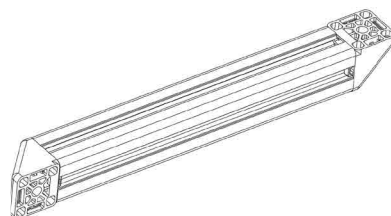
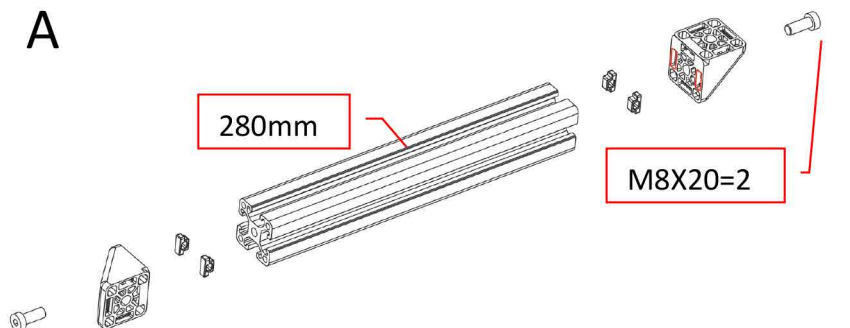


B

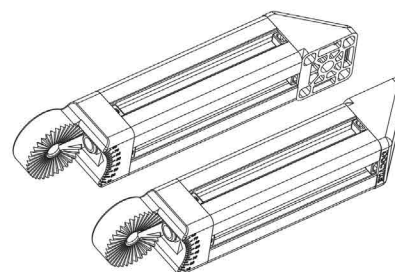
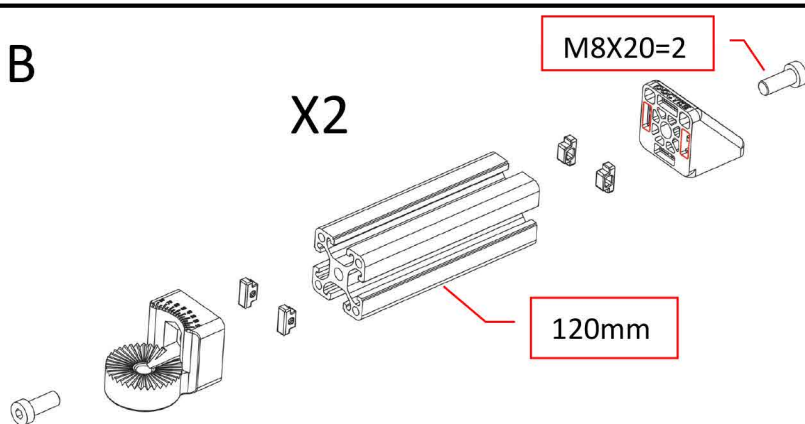




C

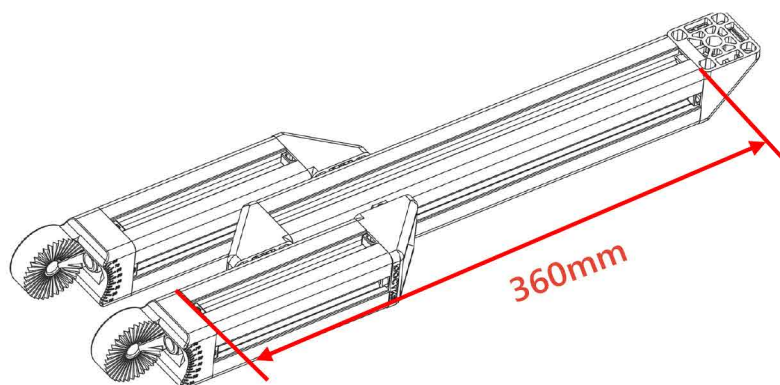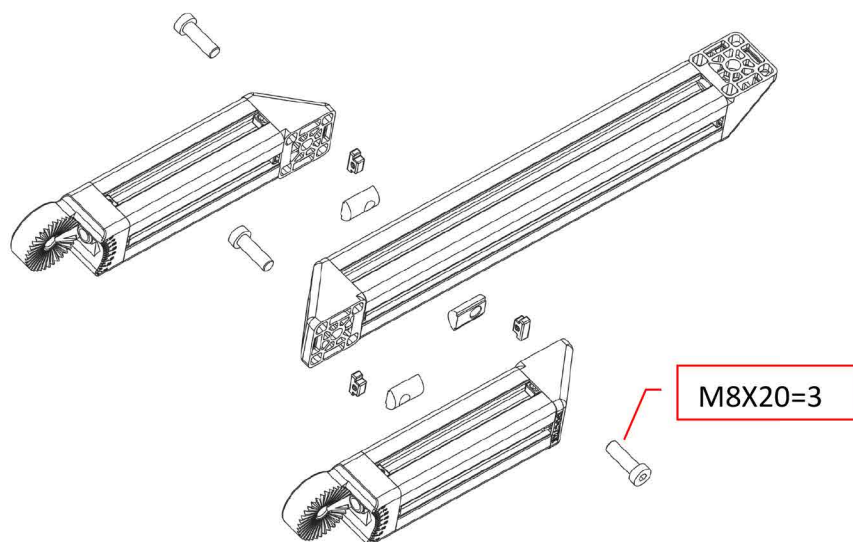



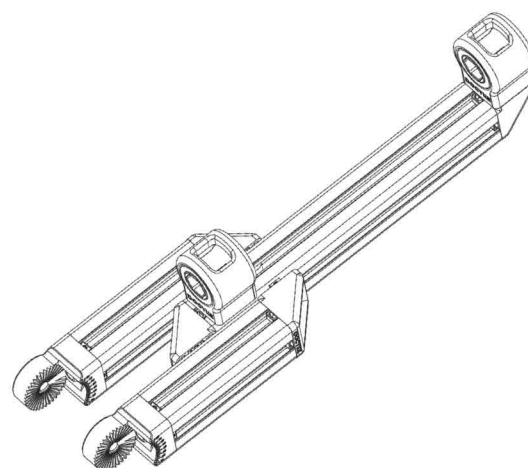
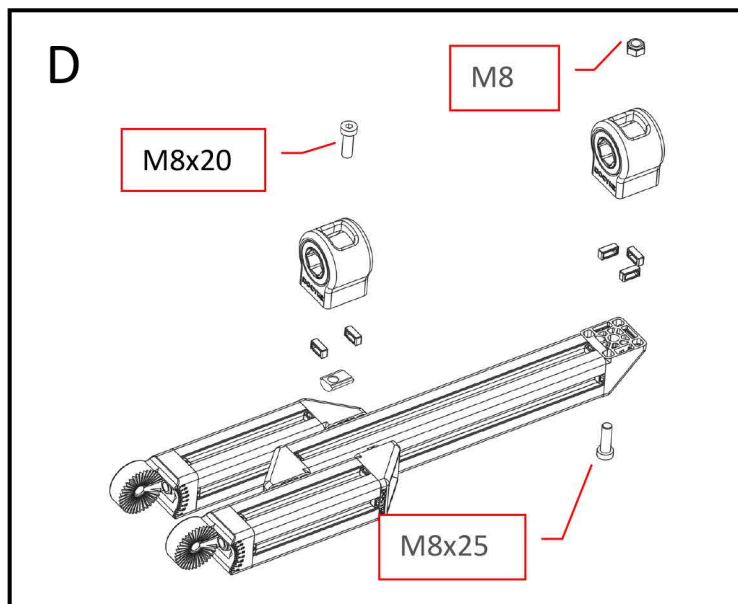


14

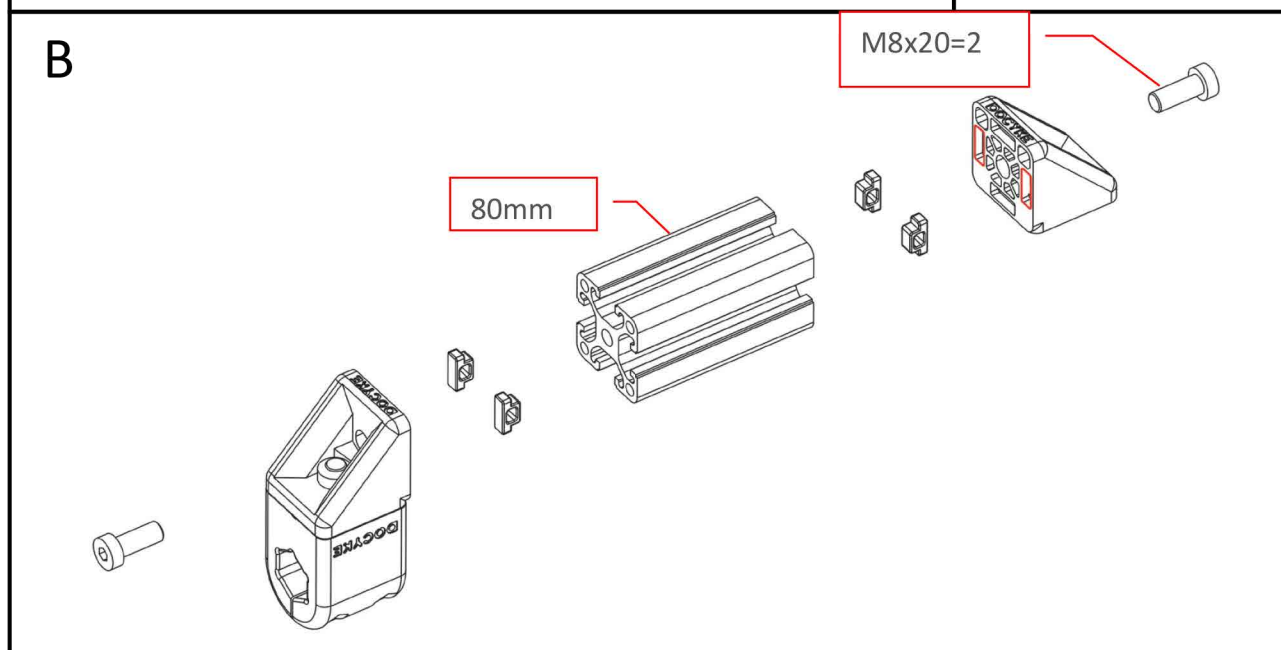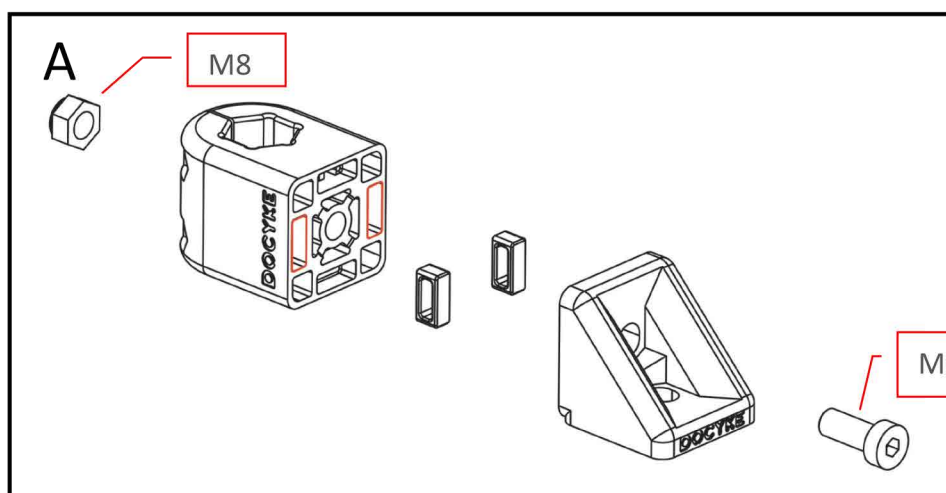


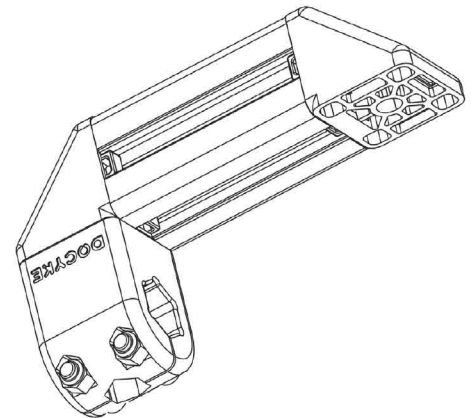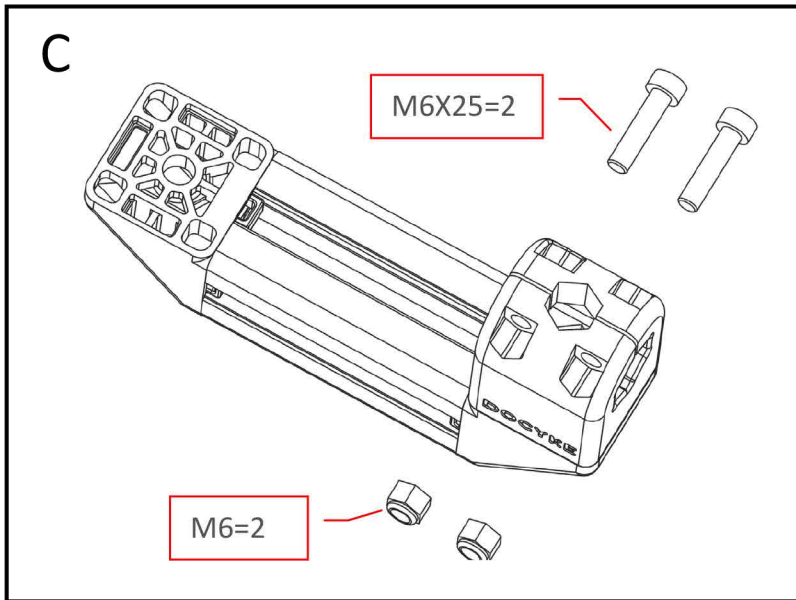



15

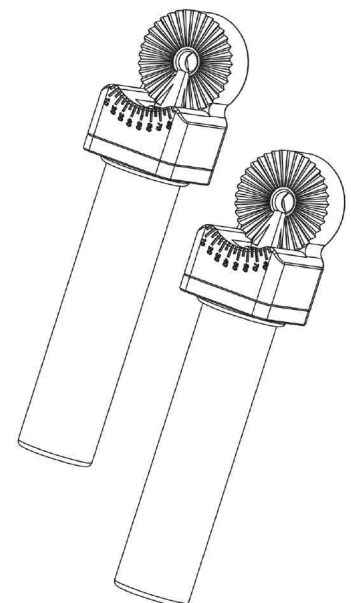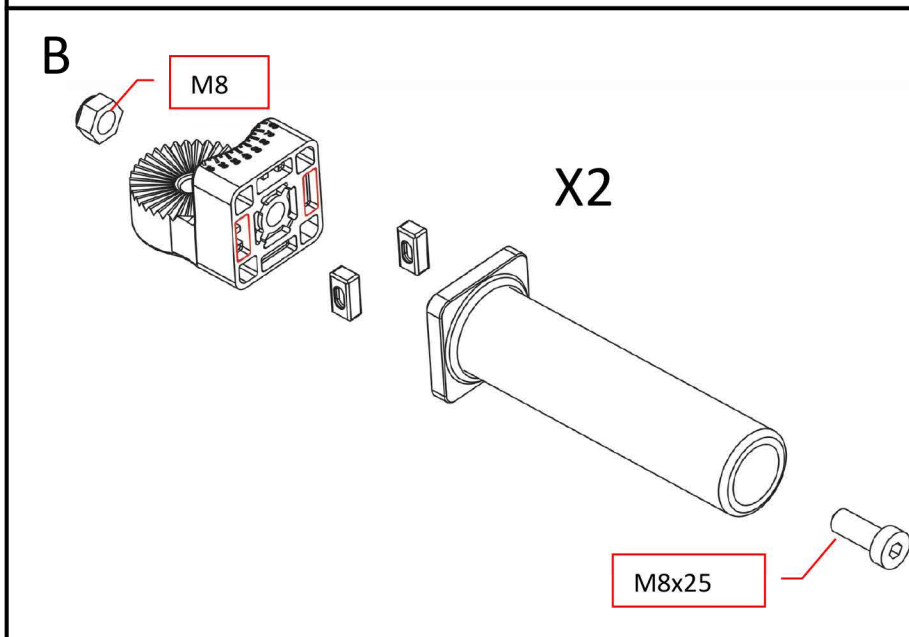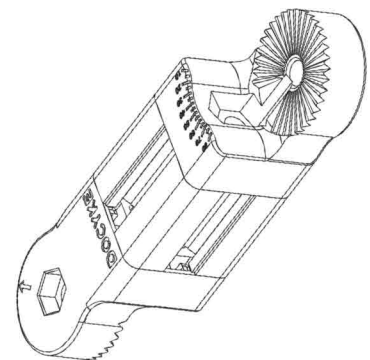
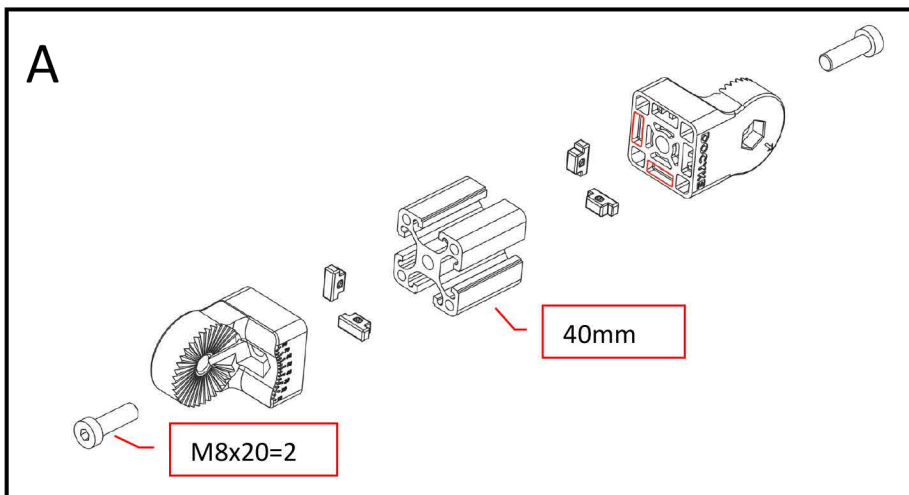


A

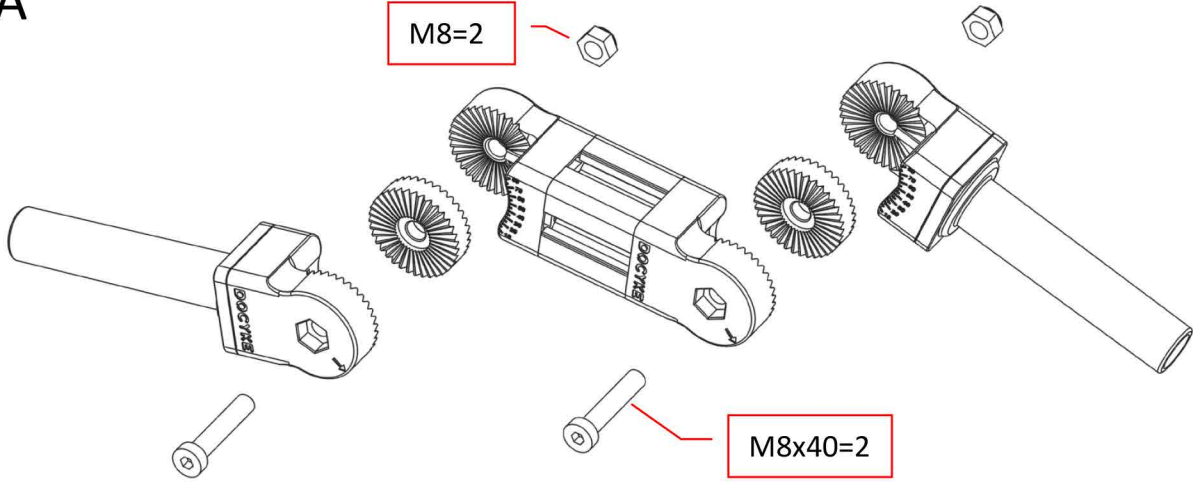


B

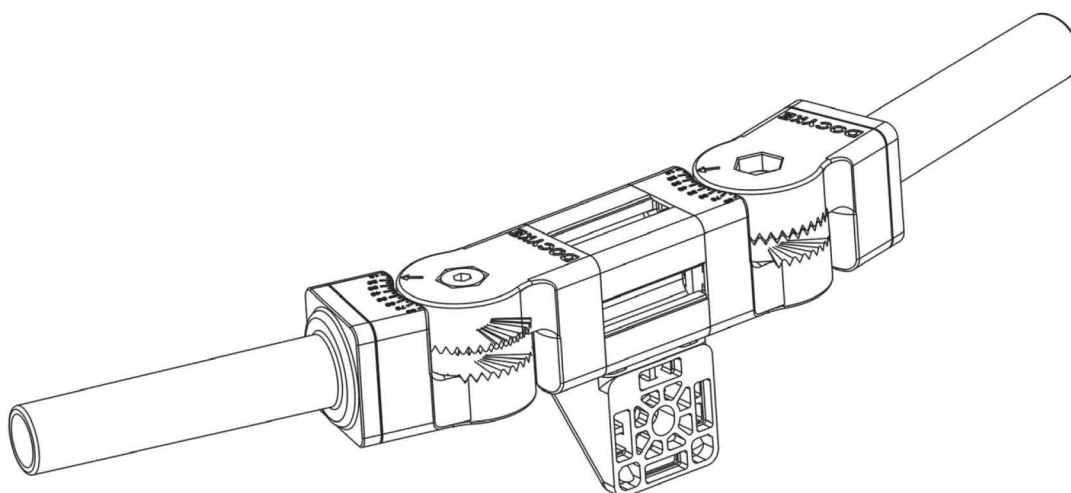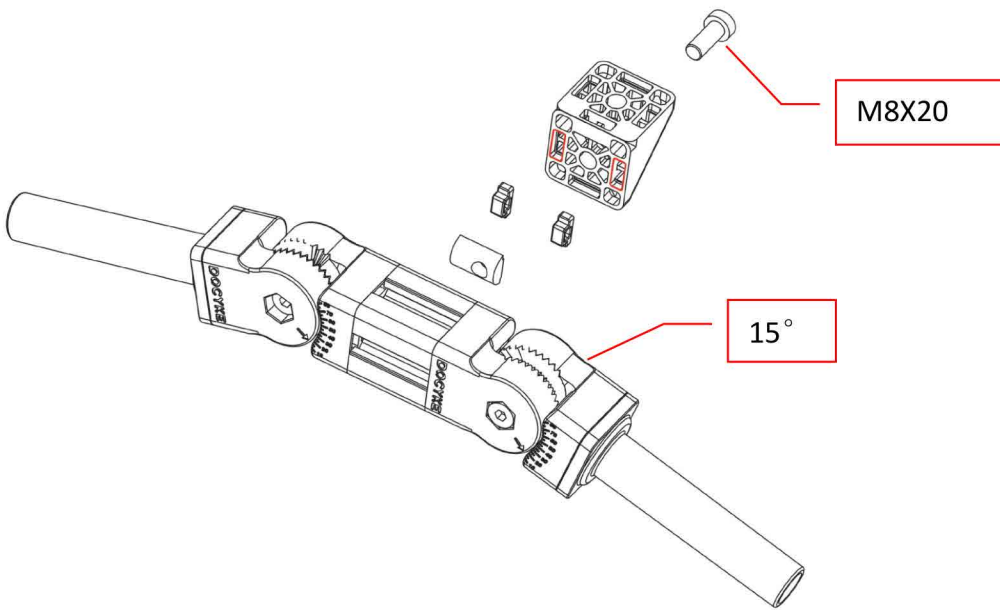


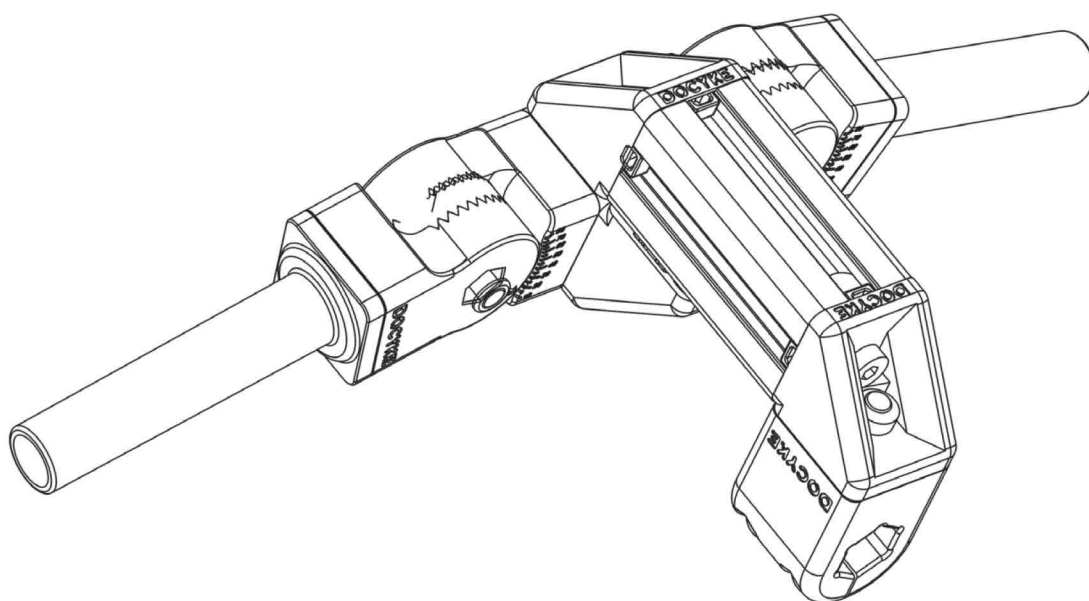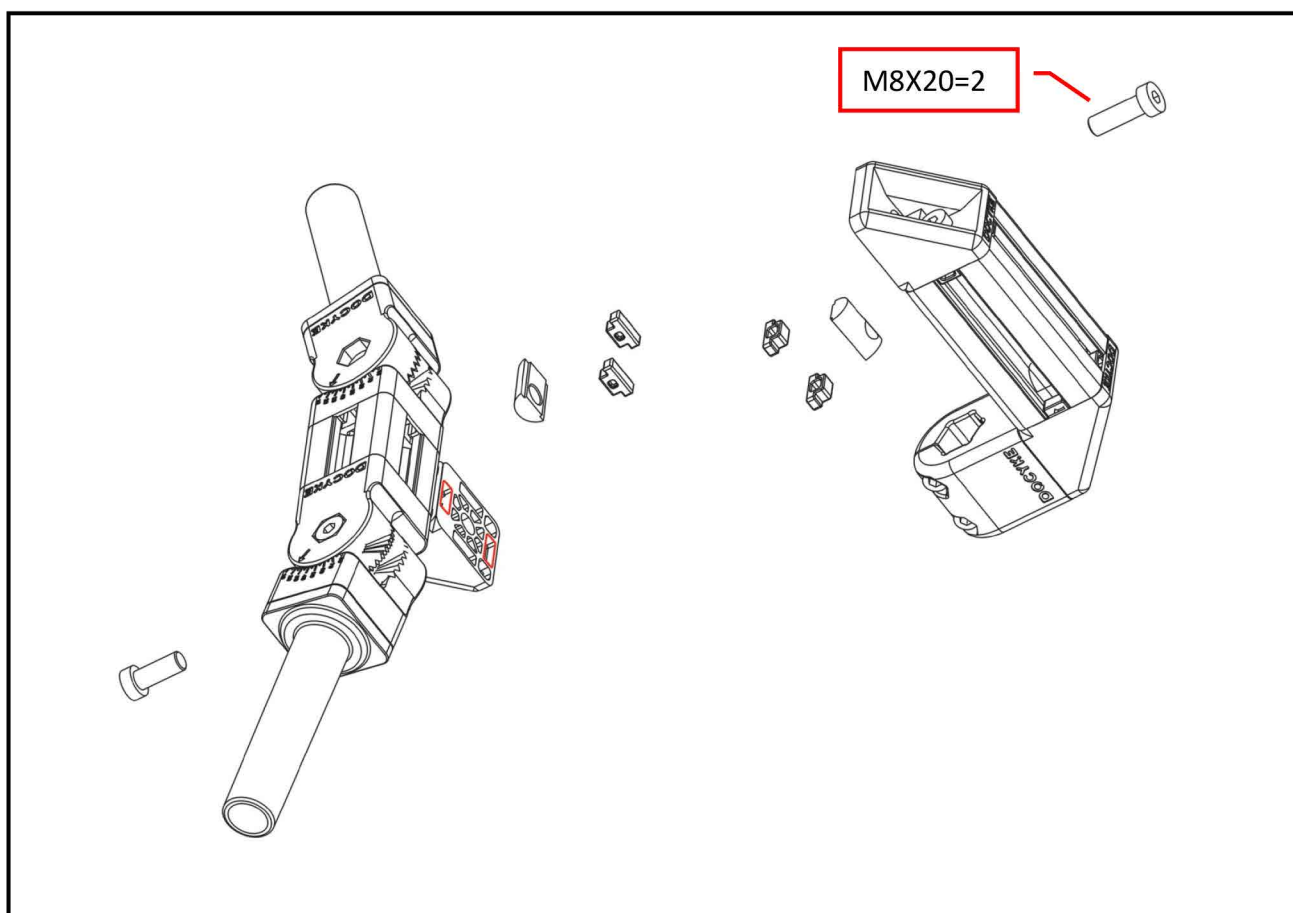


A

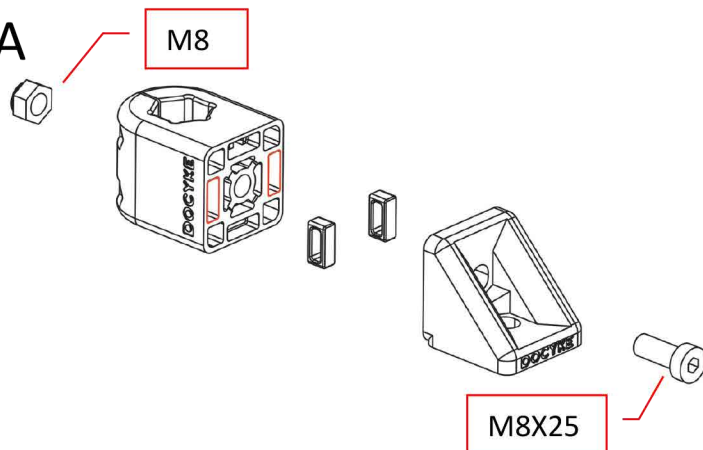


B

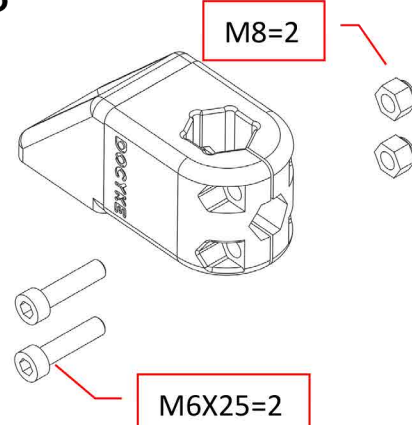

C


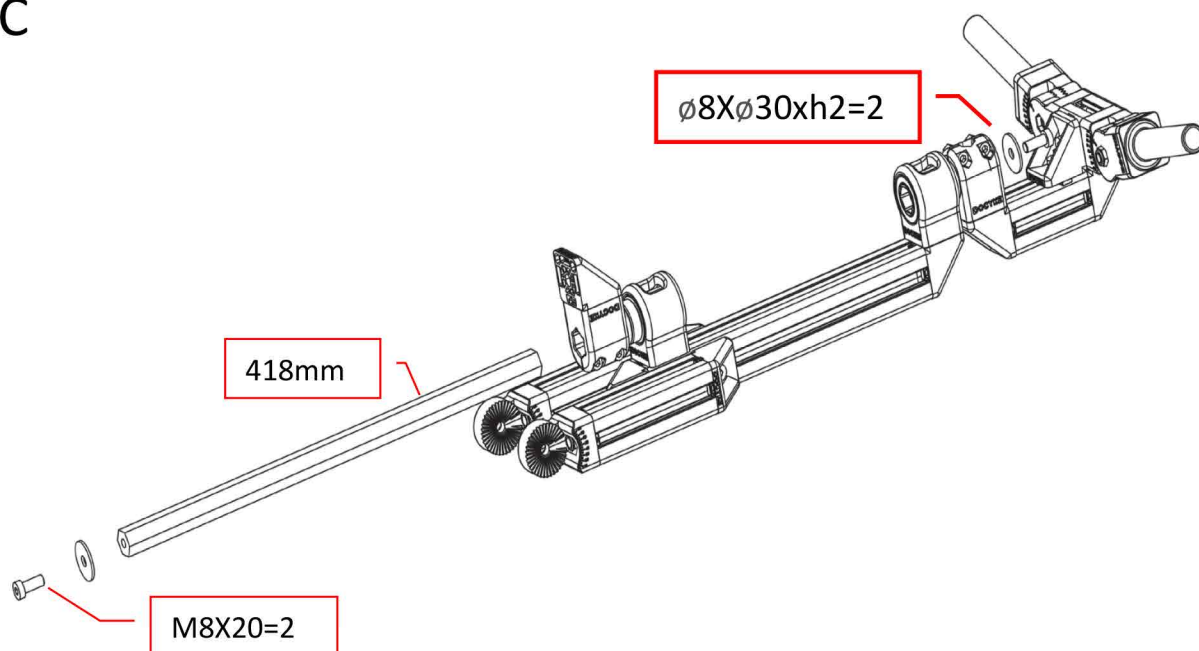


D


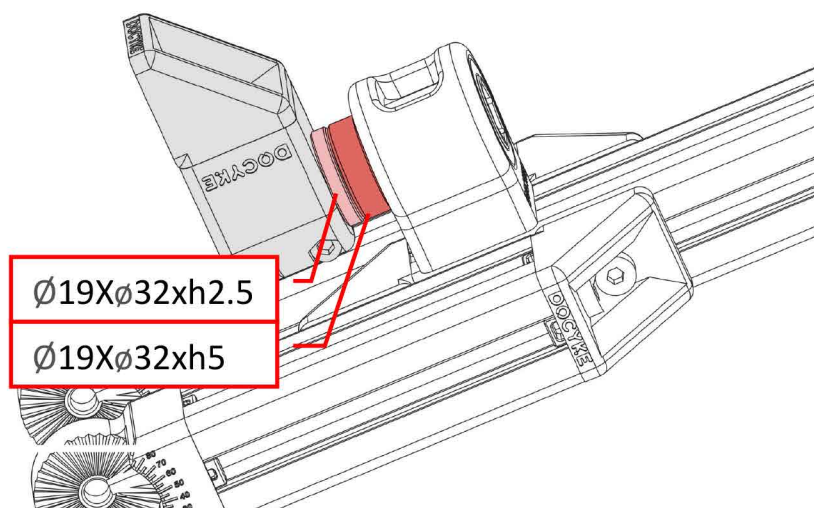


E


Ø19XØ32xh2.5

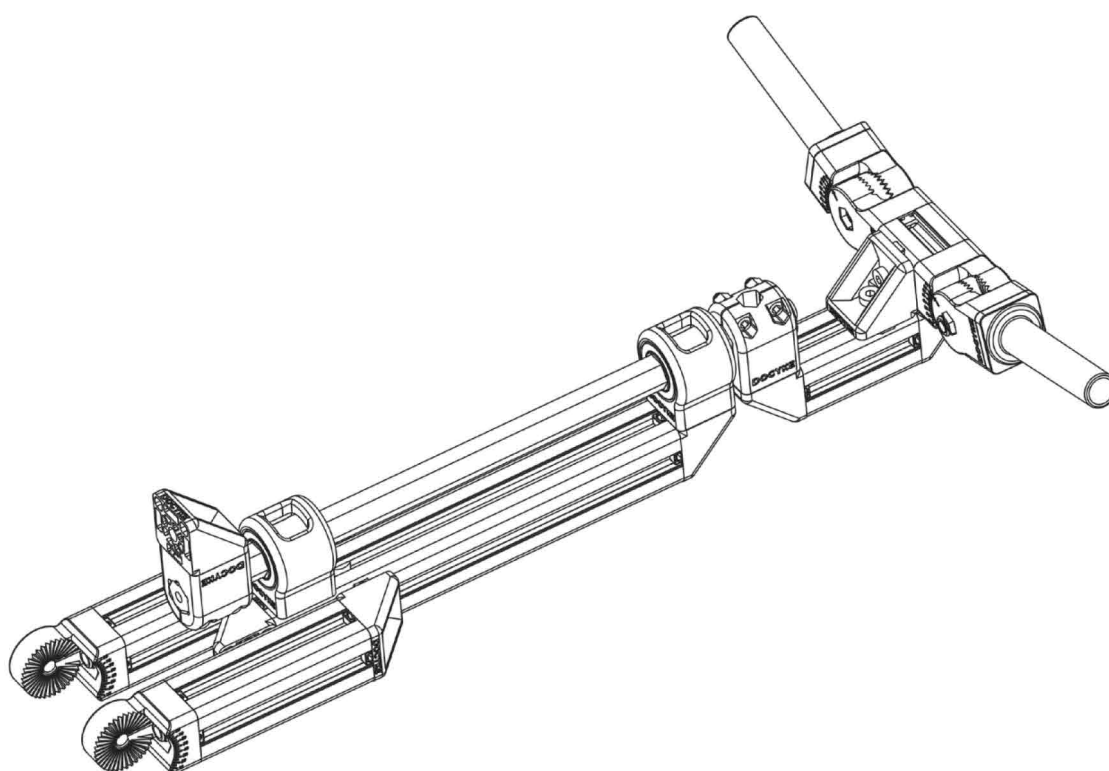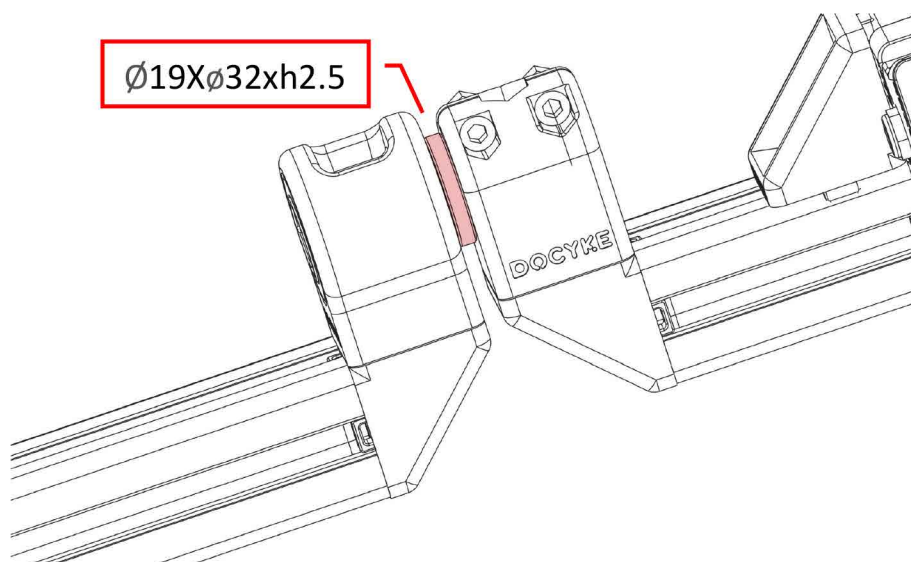


A

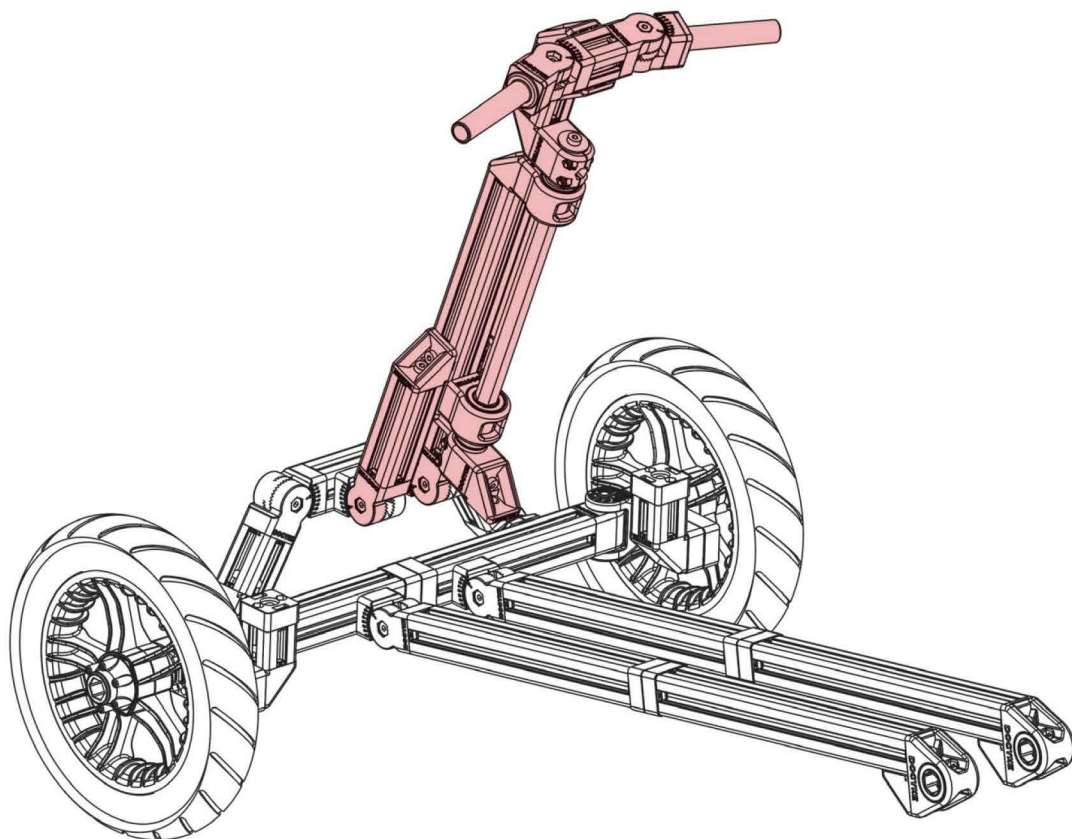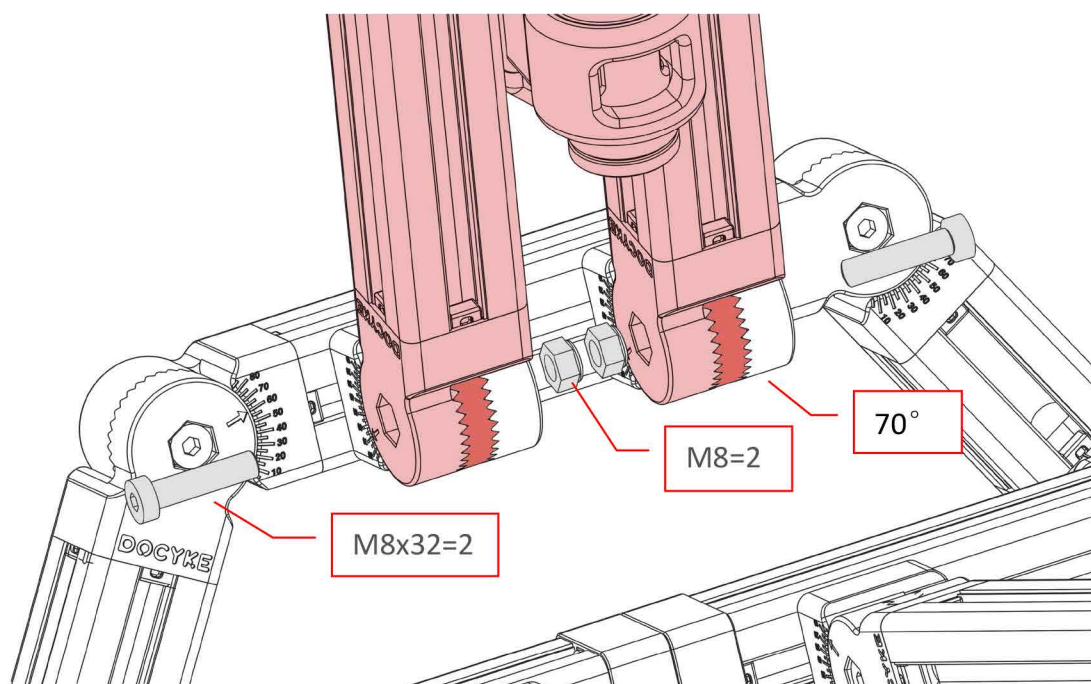


A

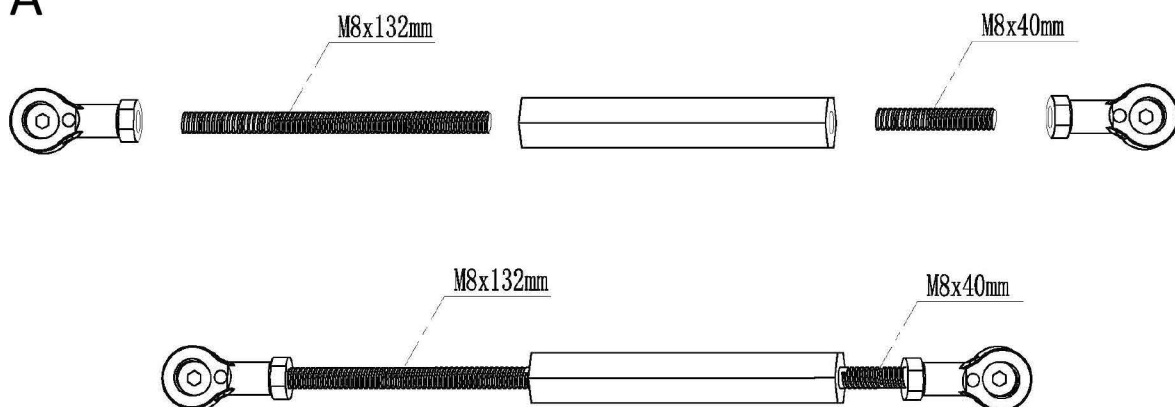


B

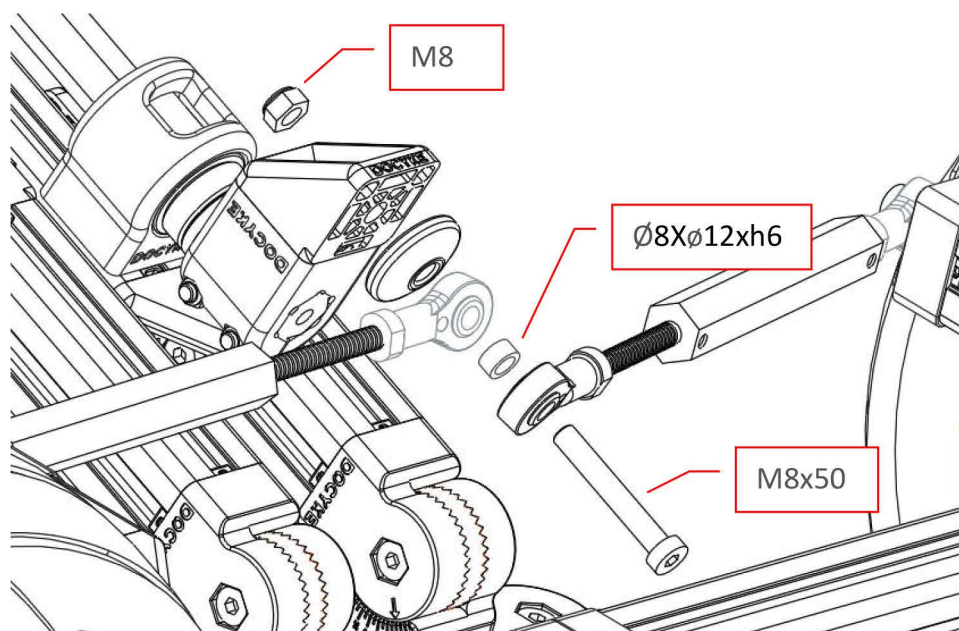

C

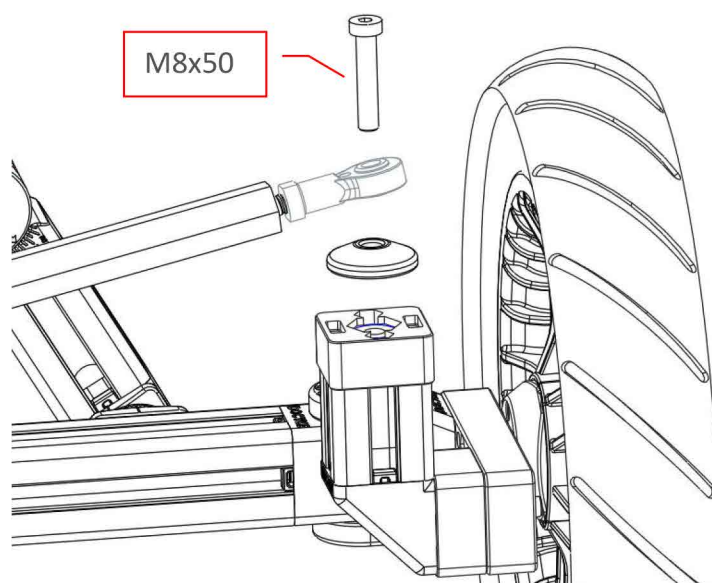

调整轮子的平行度，调毕螺母锁紧，避免松动。
Adjust the parallelism of the wheel, then lock the nut, to avoid loose.

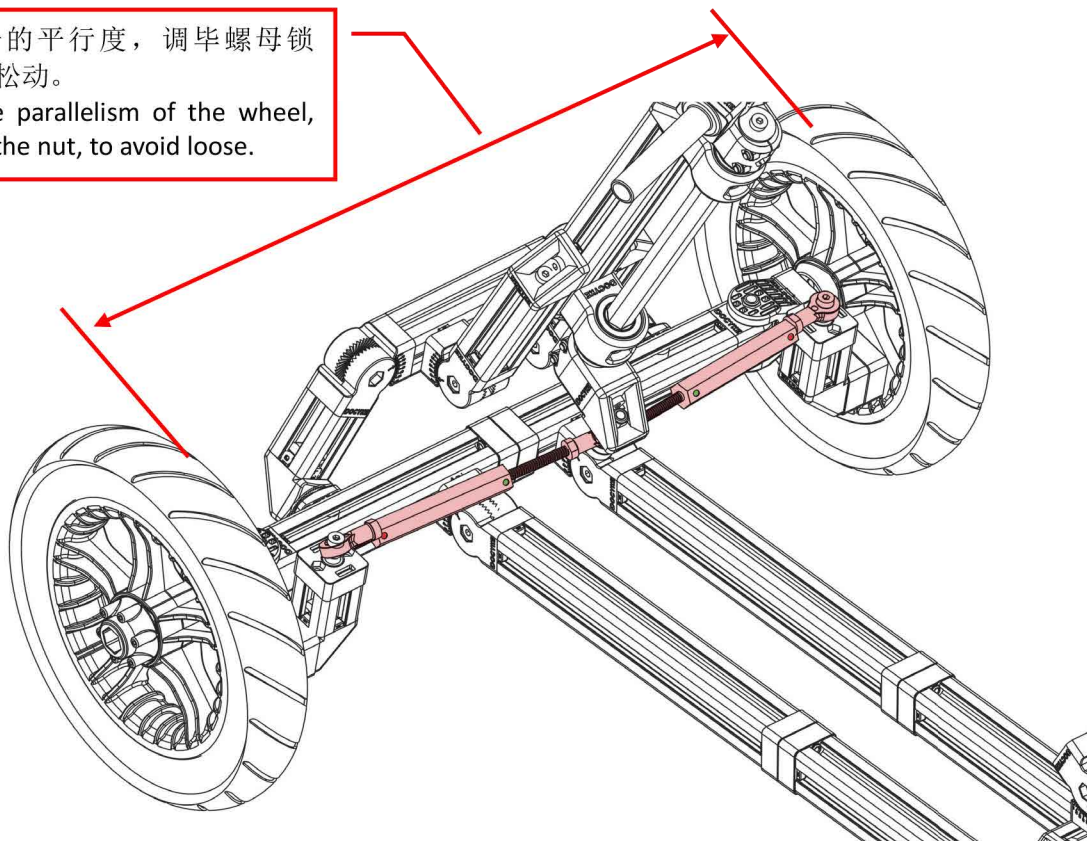



21

A

X2

240mm


M8x20=2

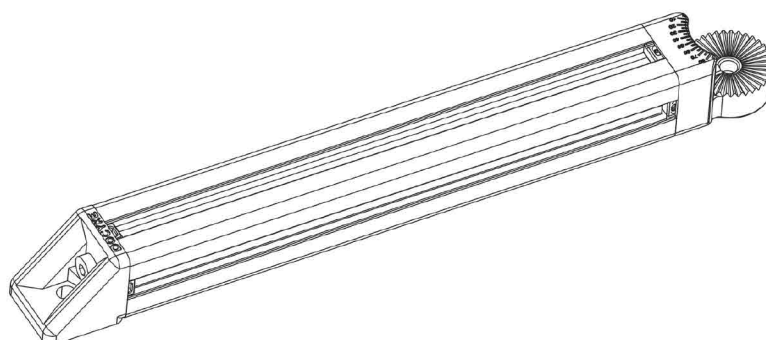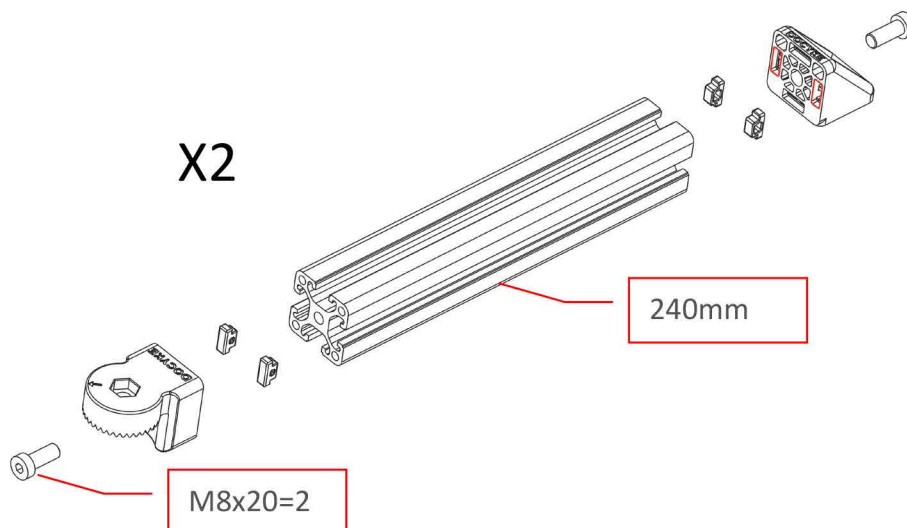

B

X2

M8X25


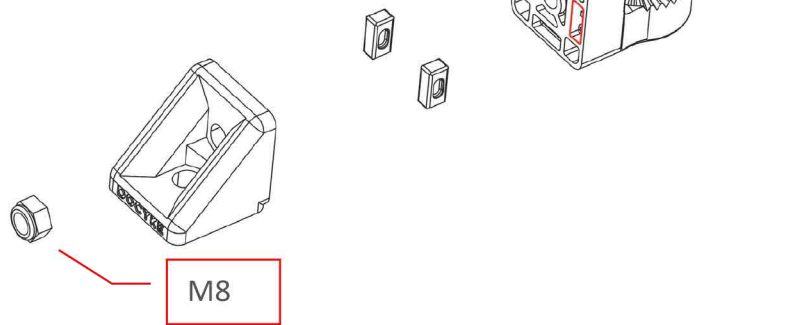


C


M8

X2



M8X32

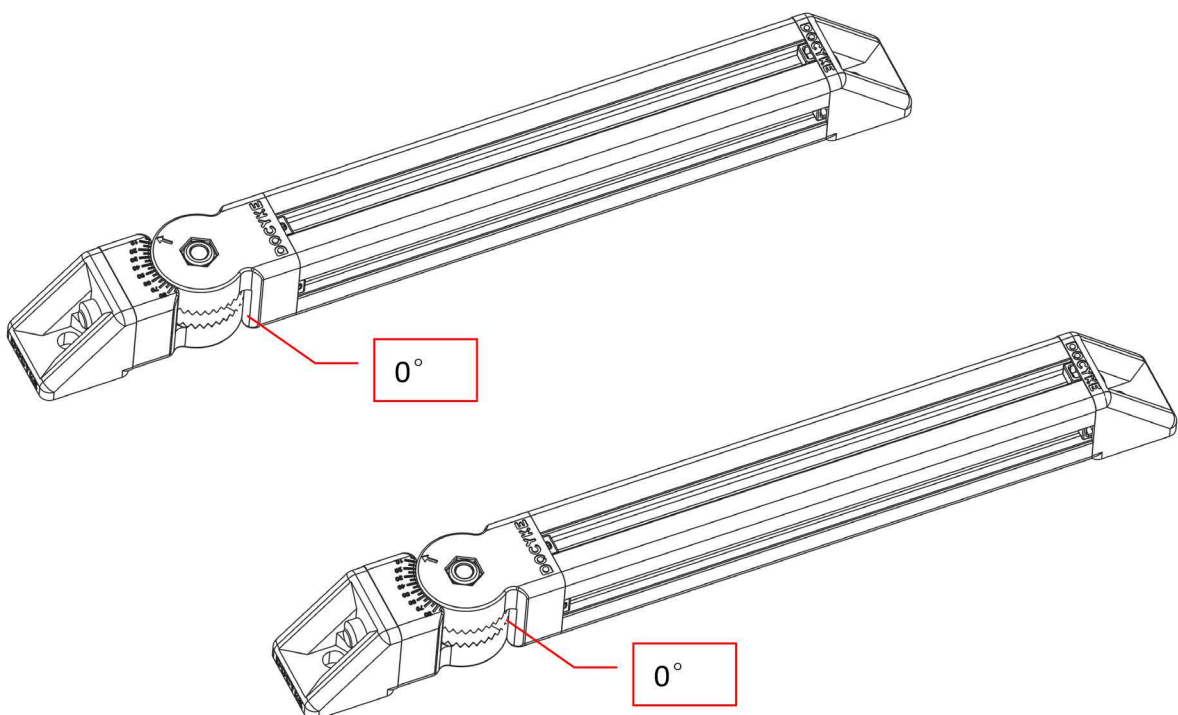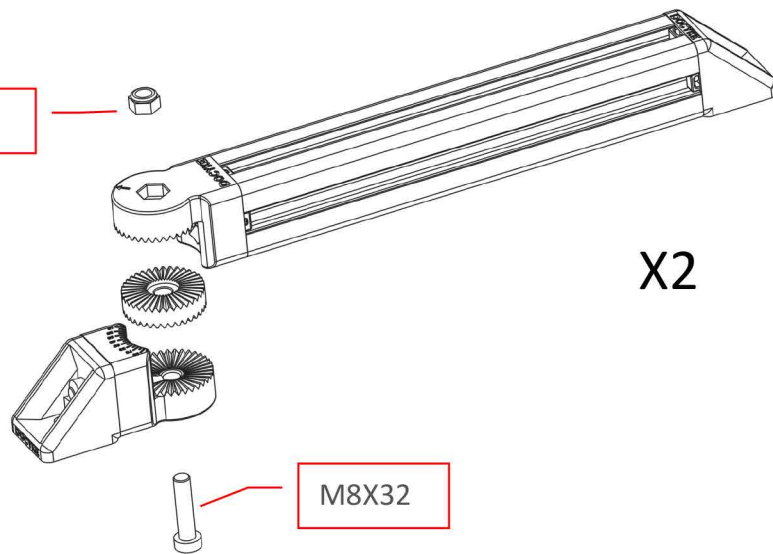


A

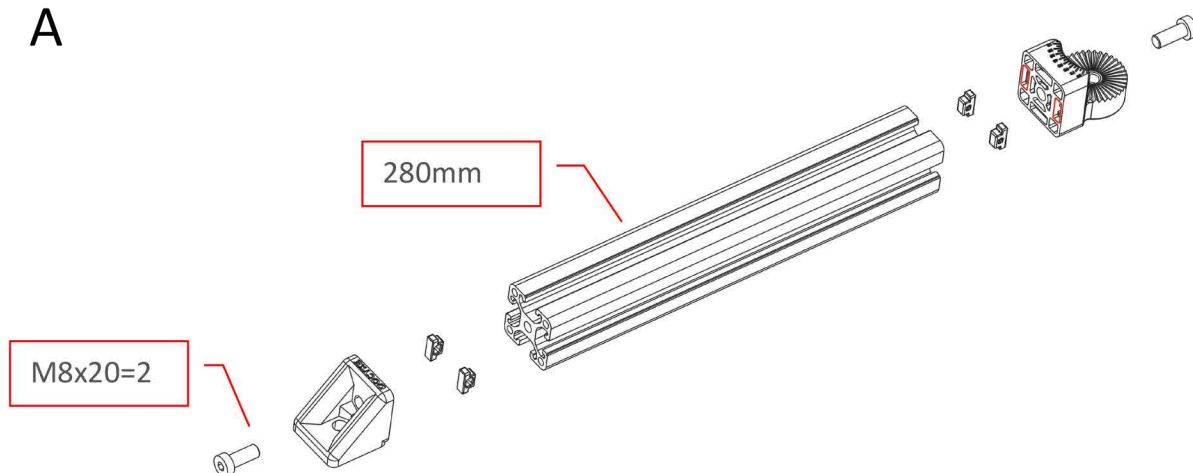



B

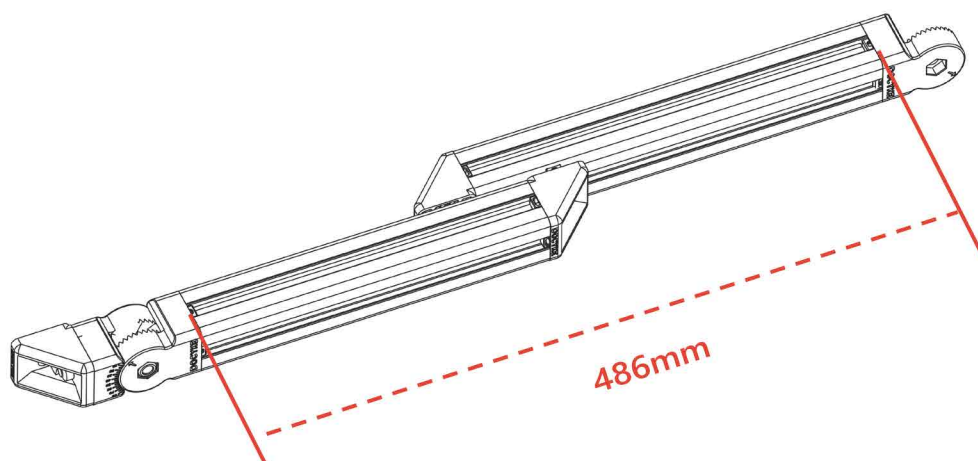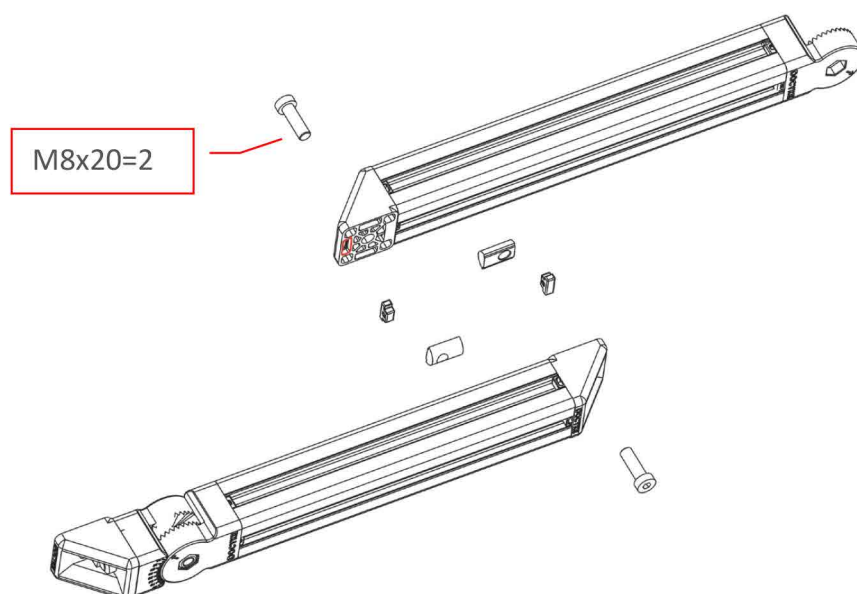



A

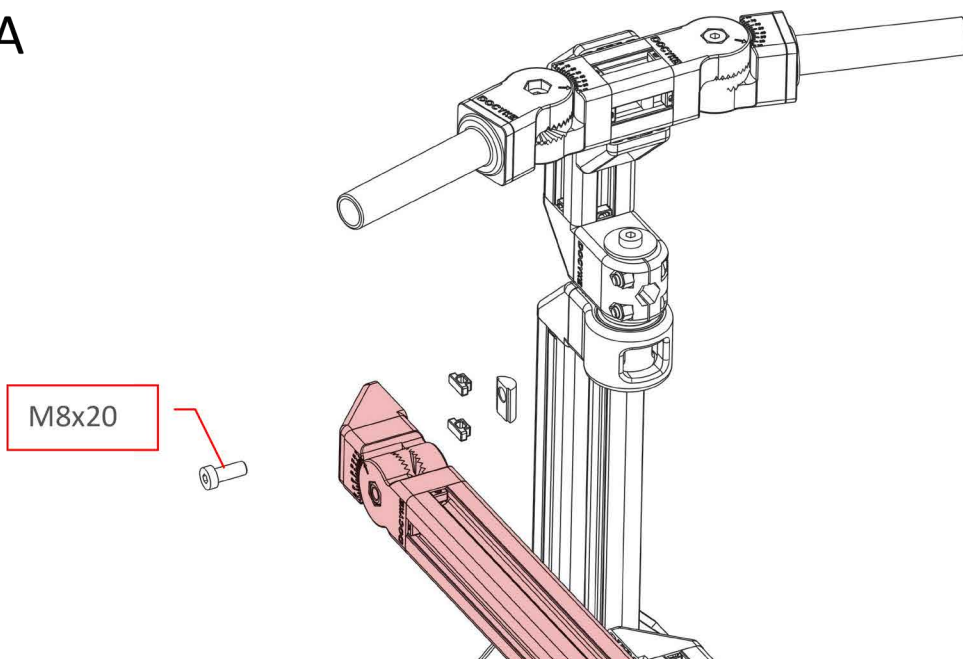

B

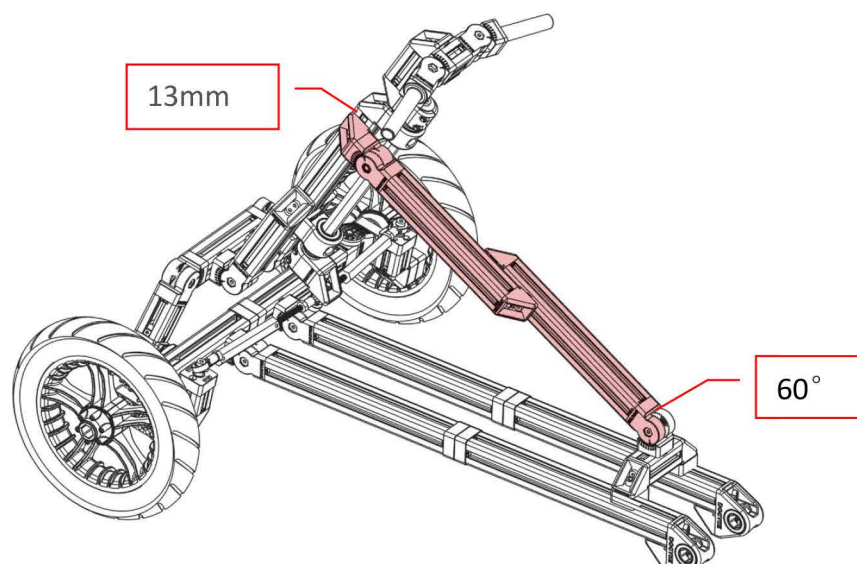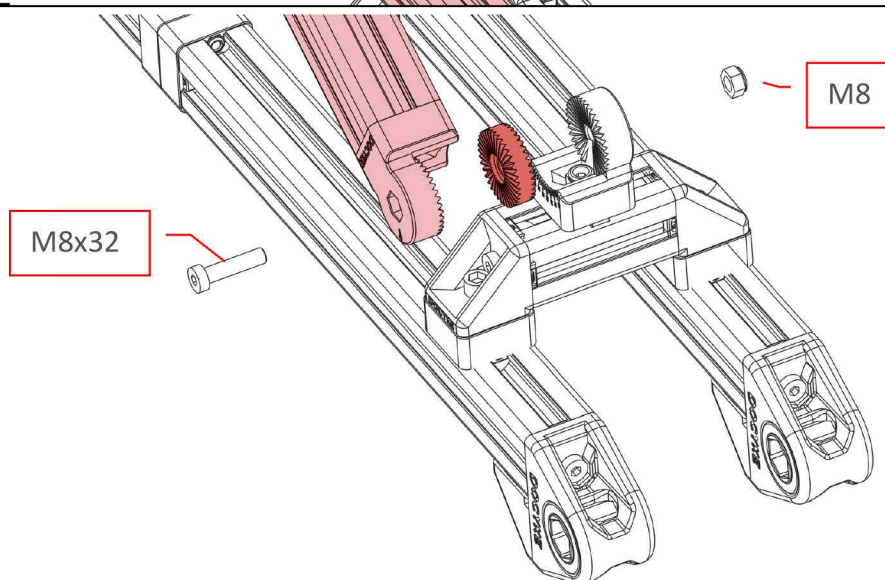


C

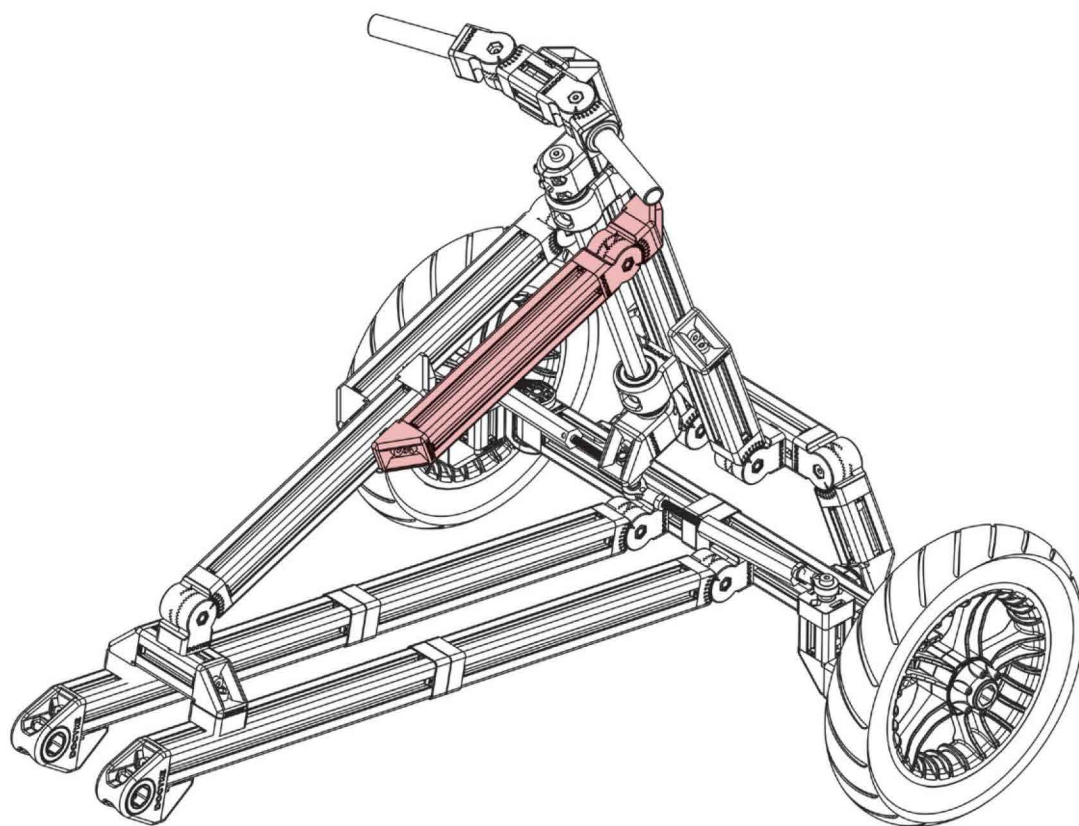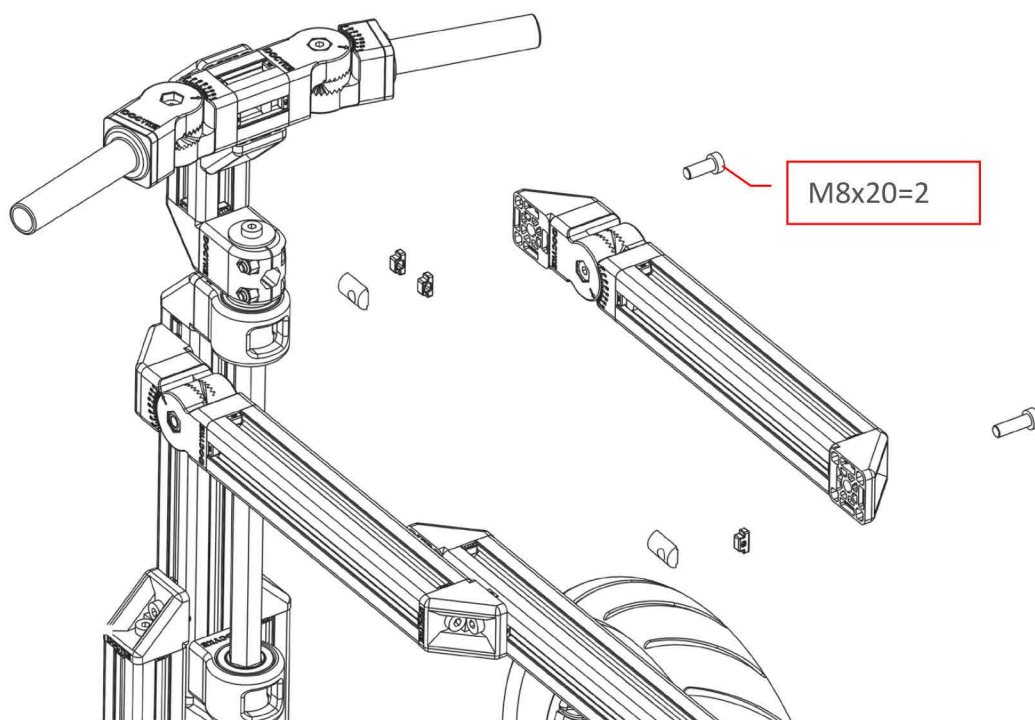


螺丝先不拧紧，待齿带拉紧后，再拧紧固定。

The screws are not tightened until hold tooth belt is tensioned with full force, then tightened bolts well.


A

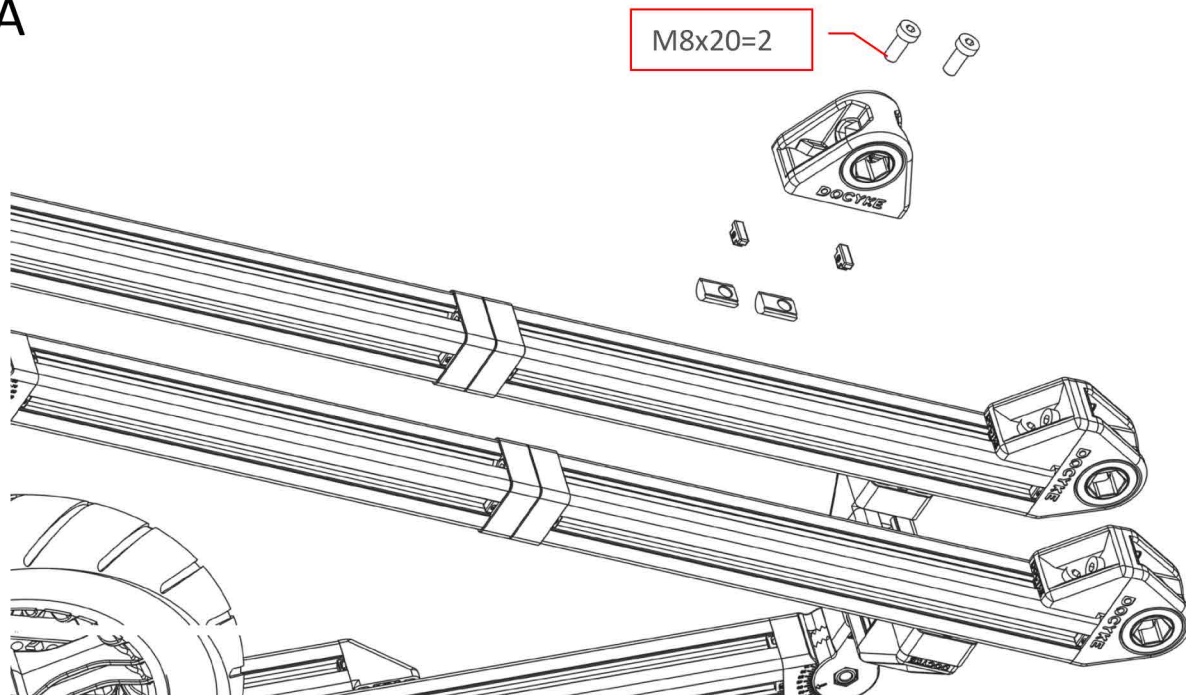


B

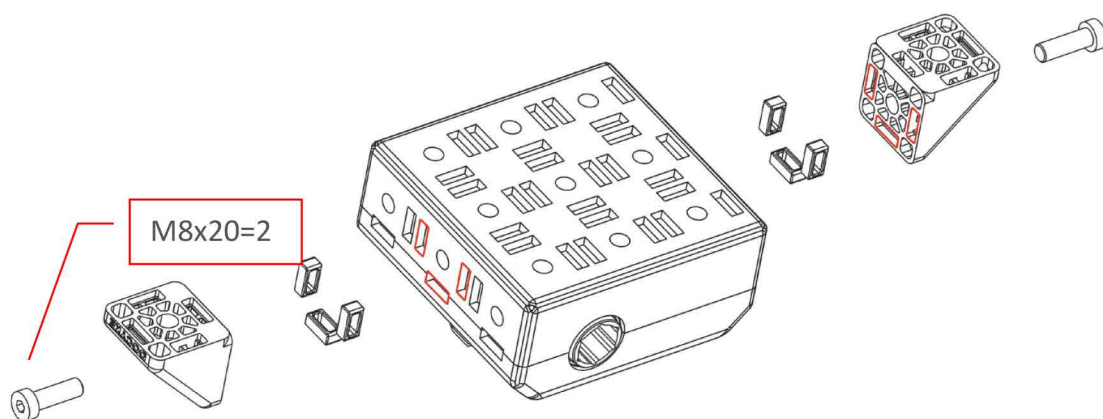


C


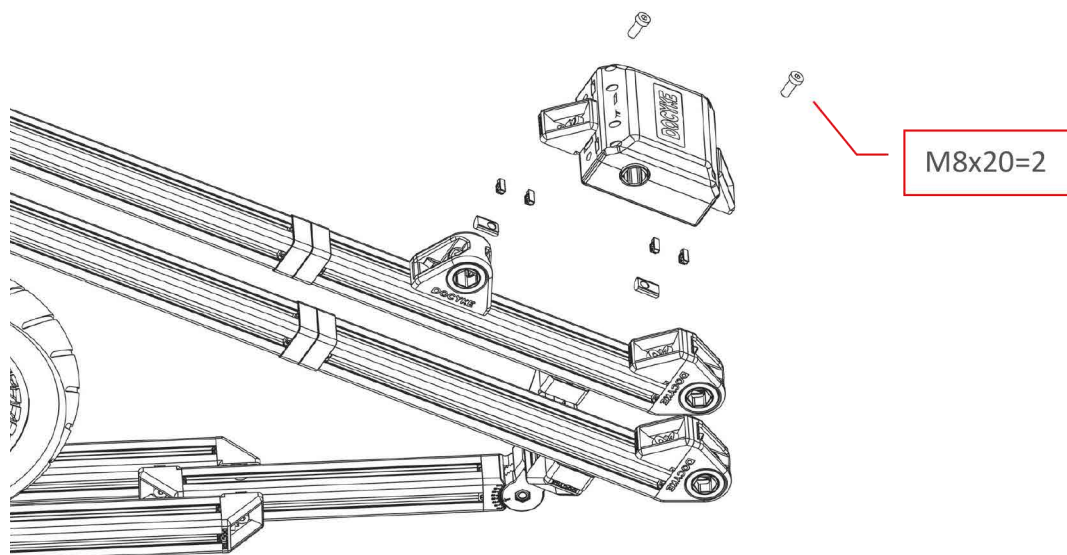


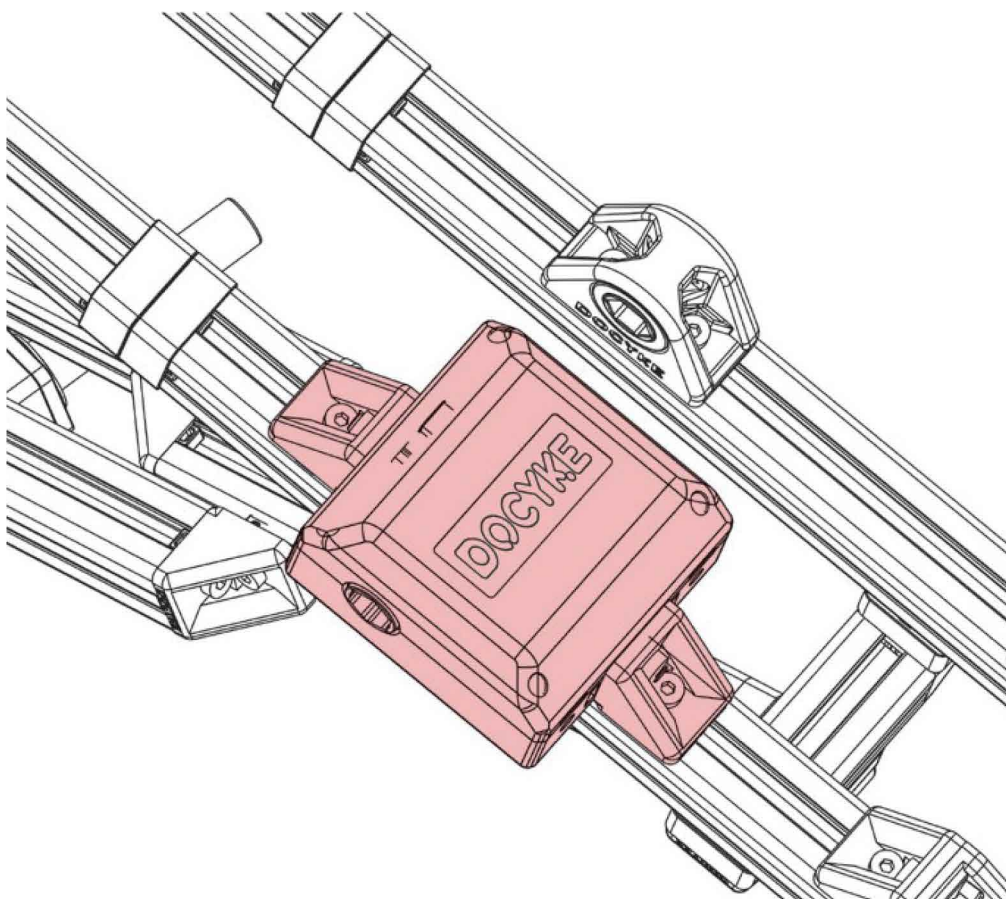



25

A

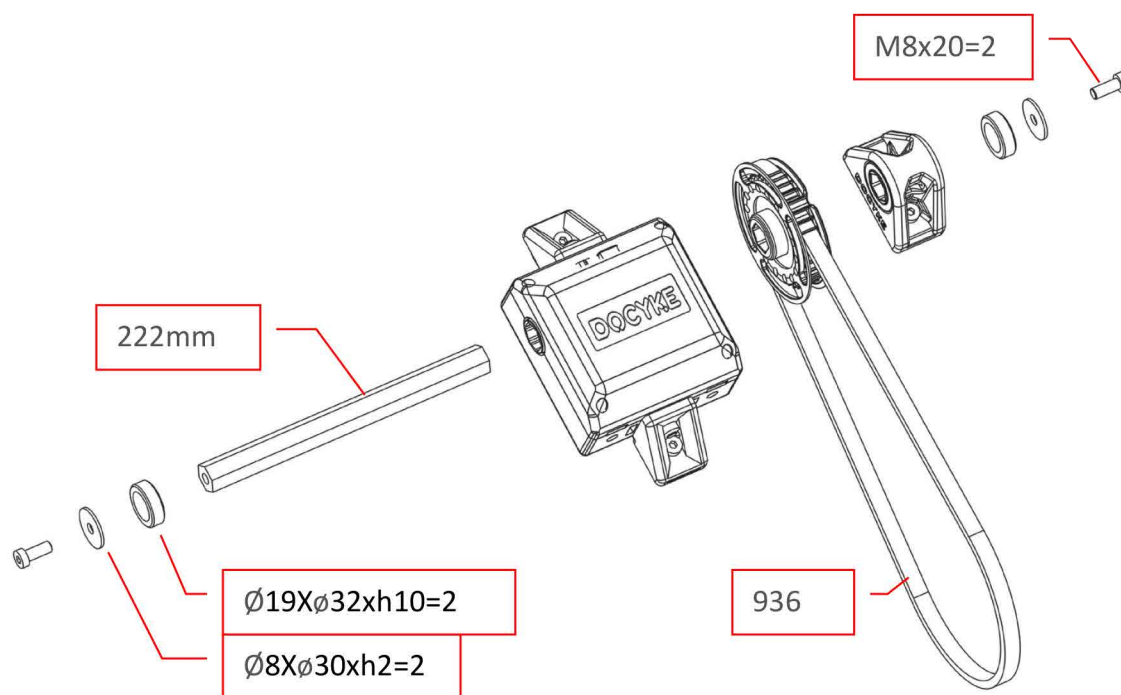


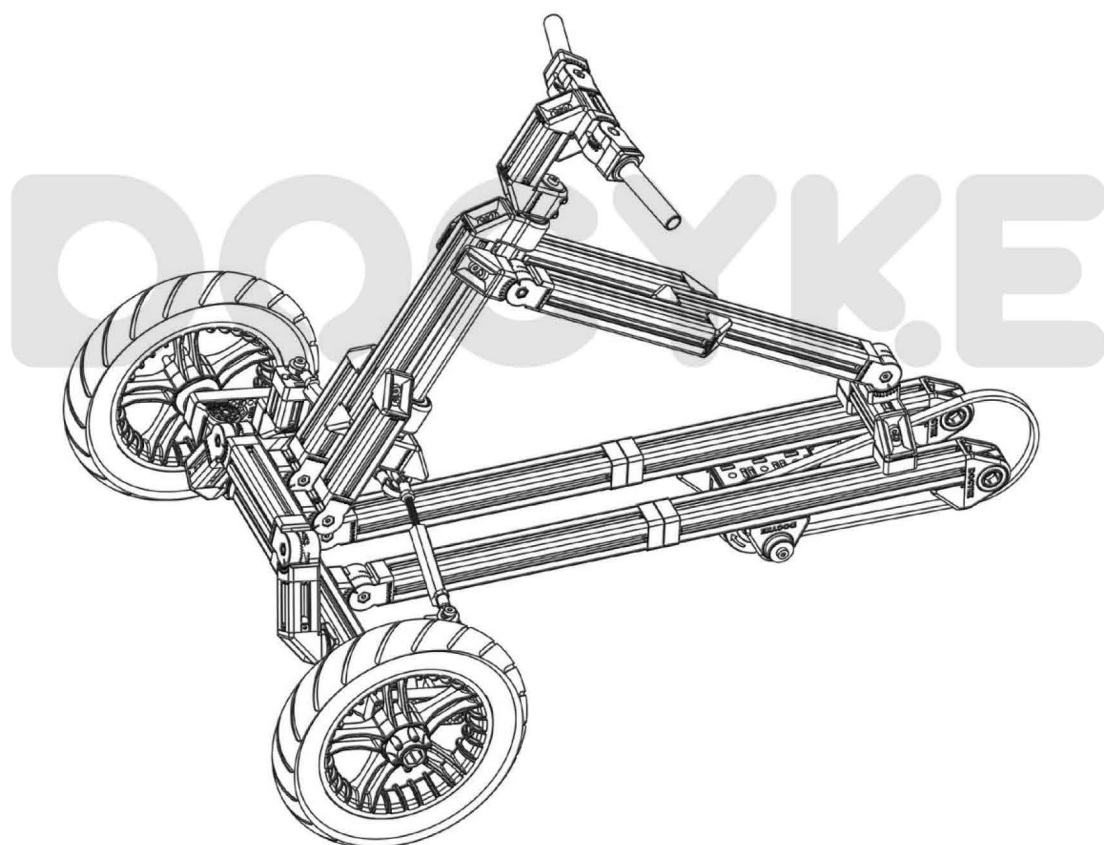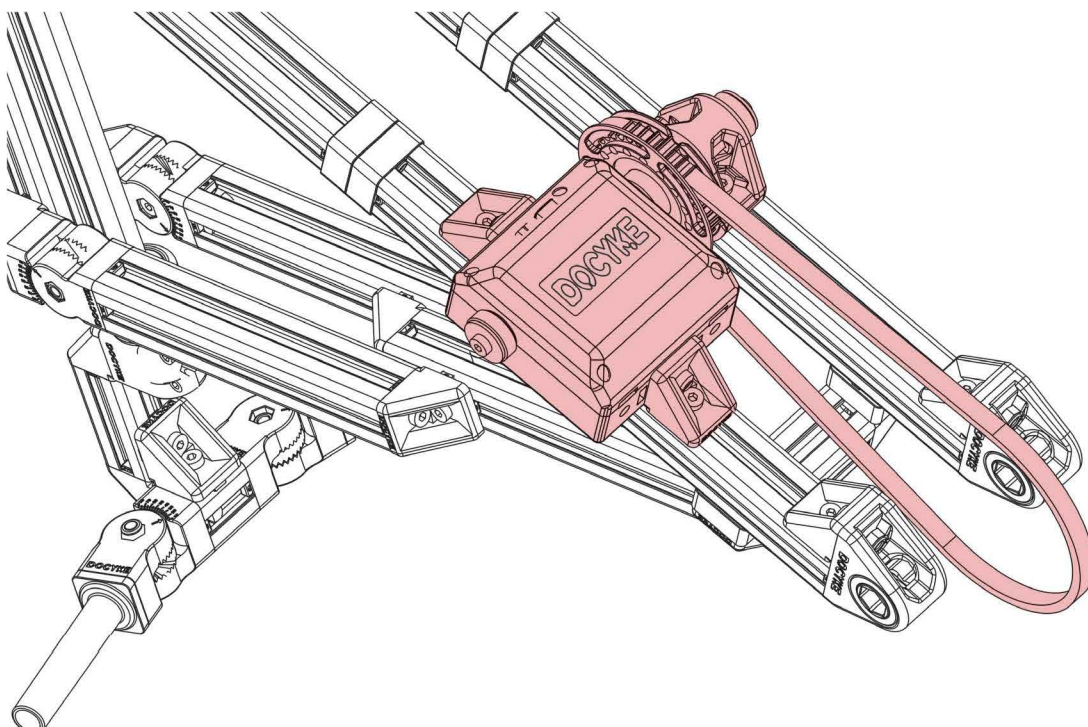


A

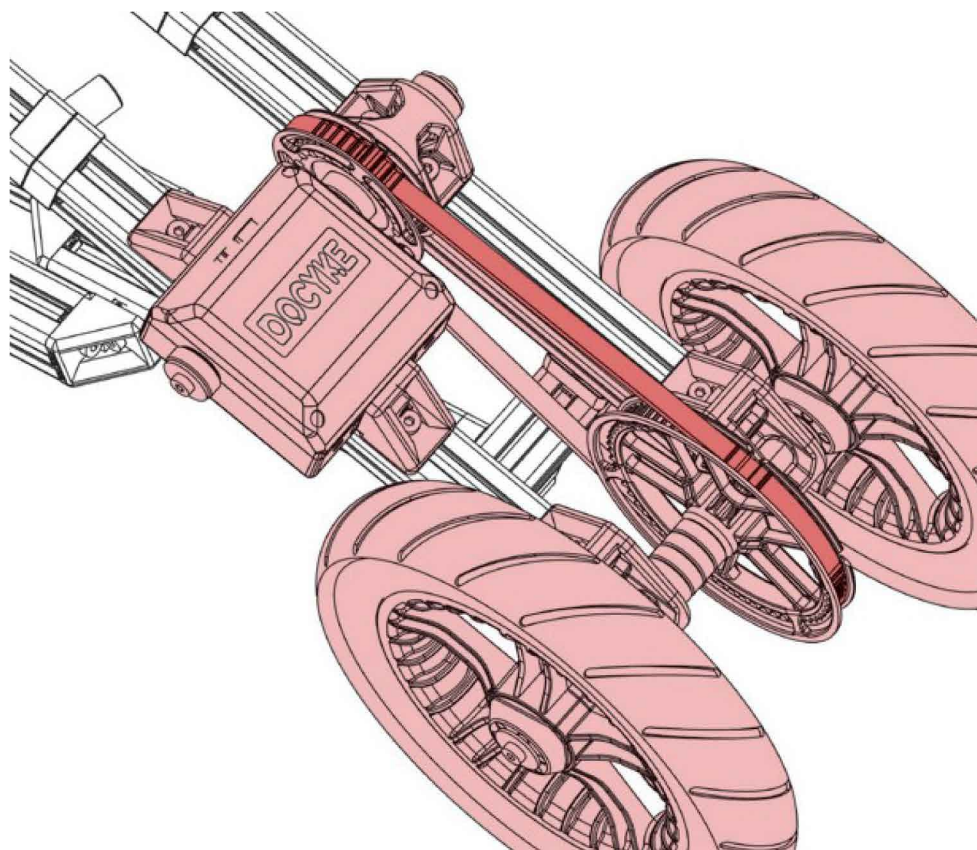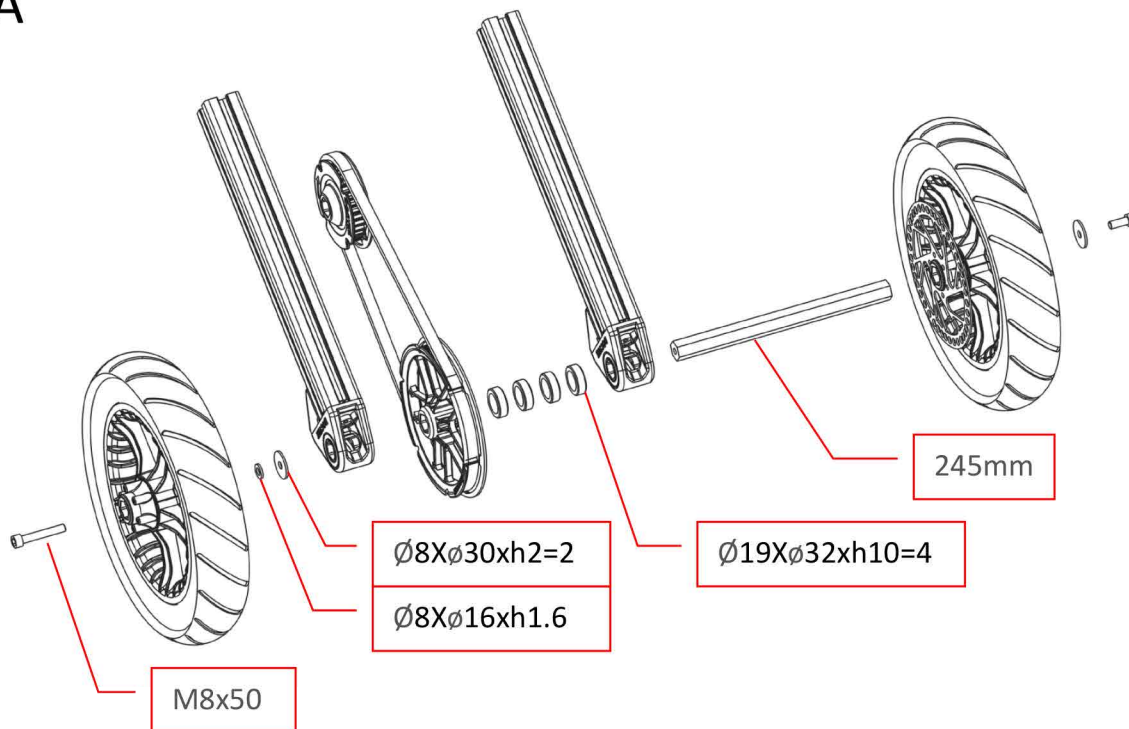


A

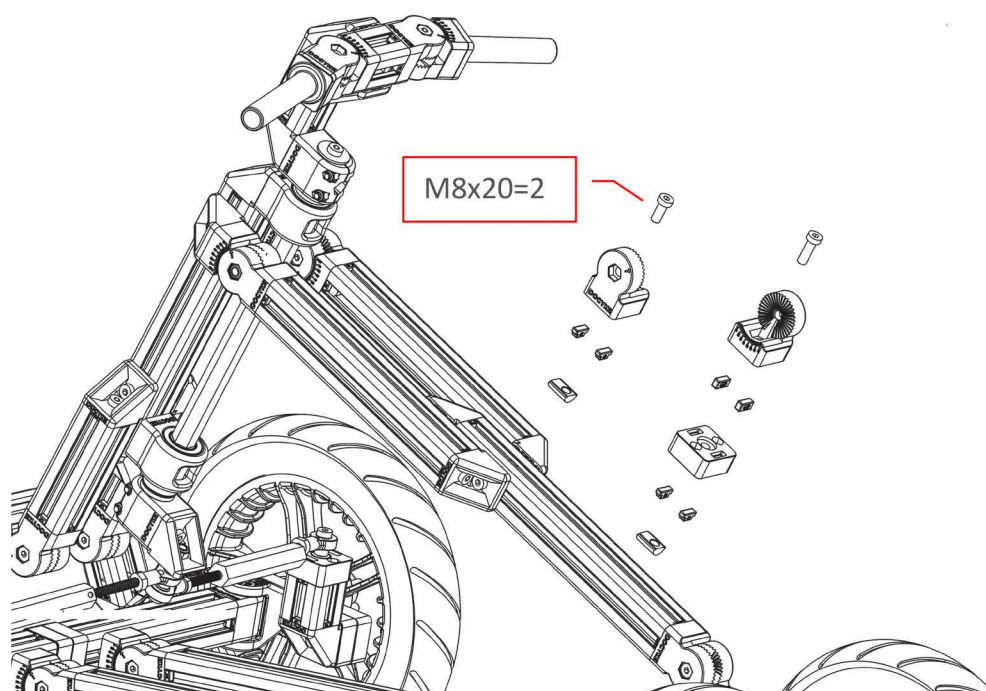


B

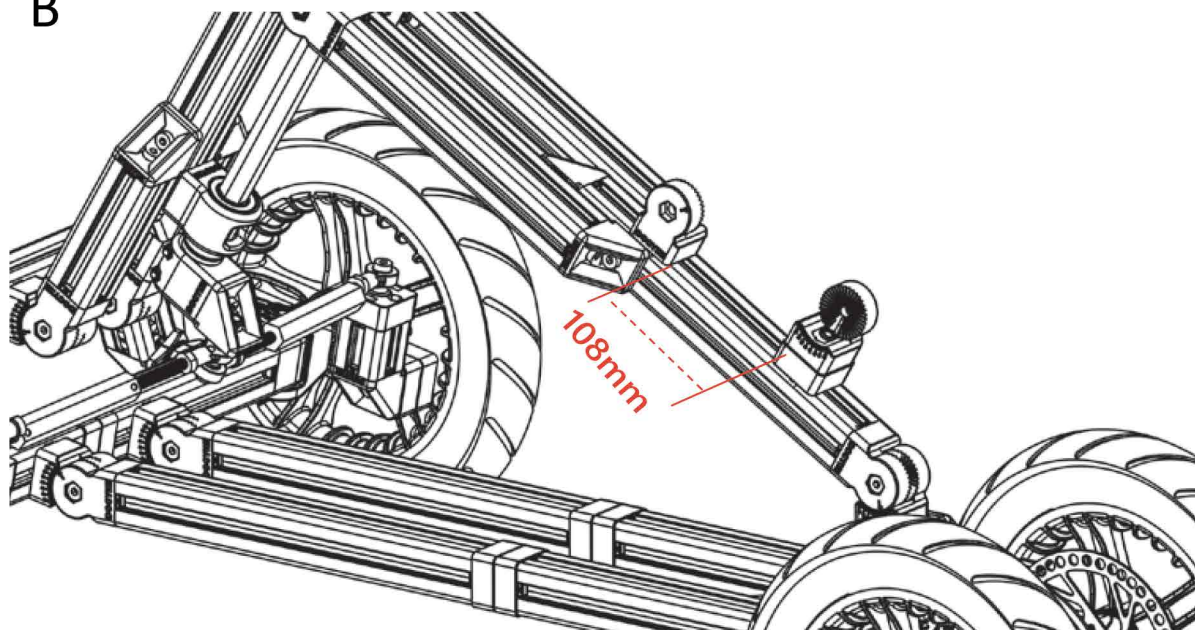

A


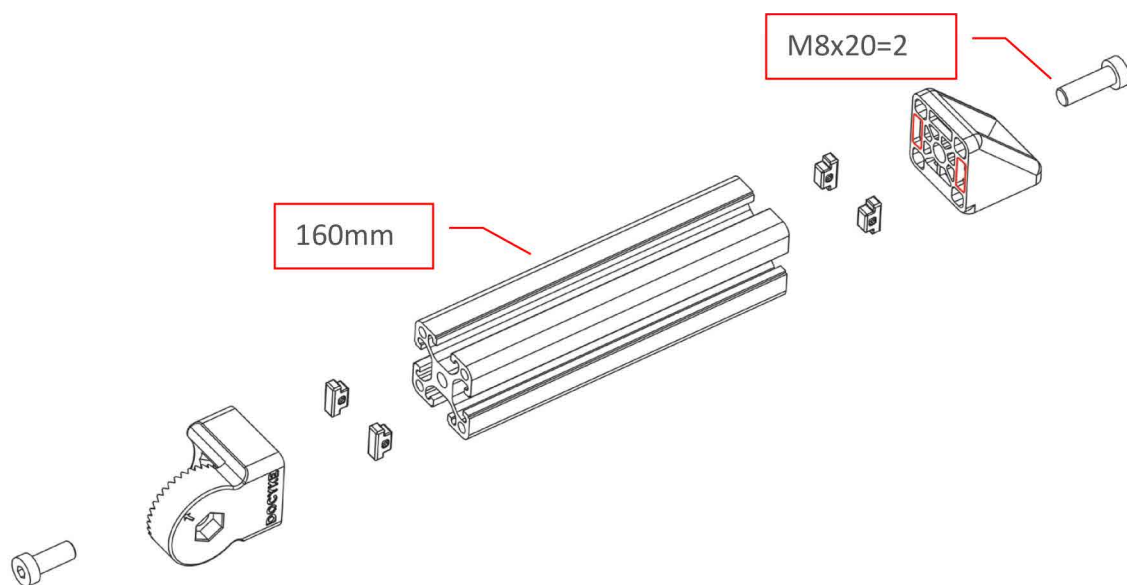


B


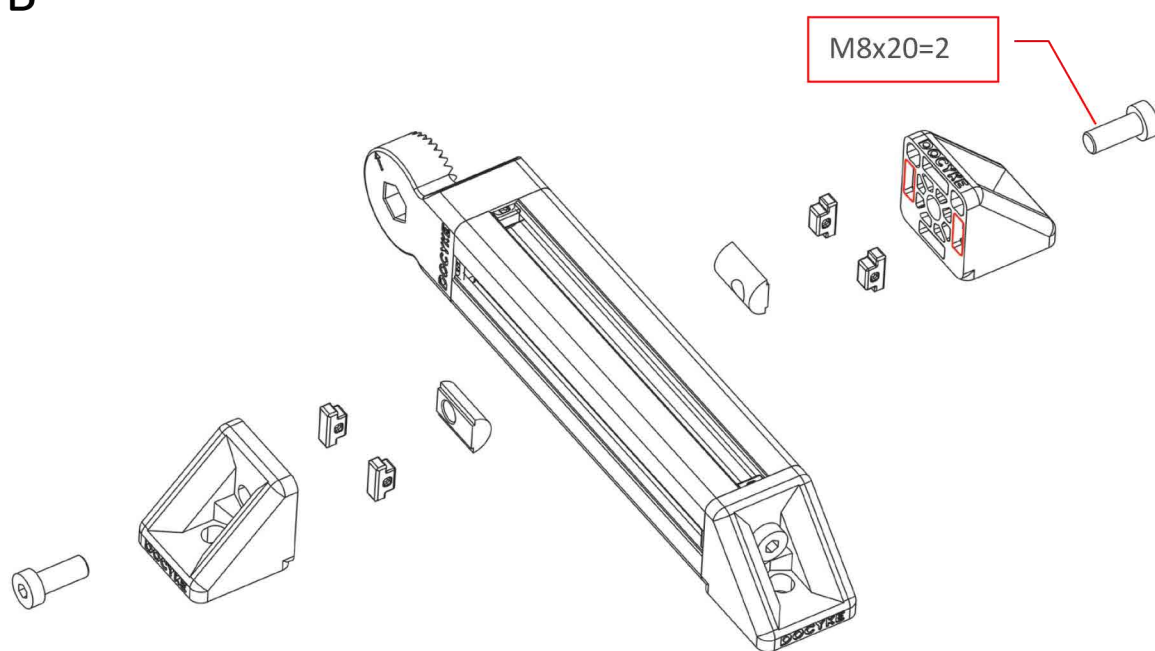



C

M8x20

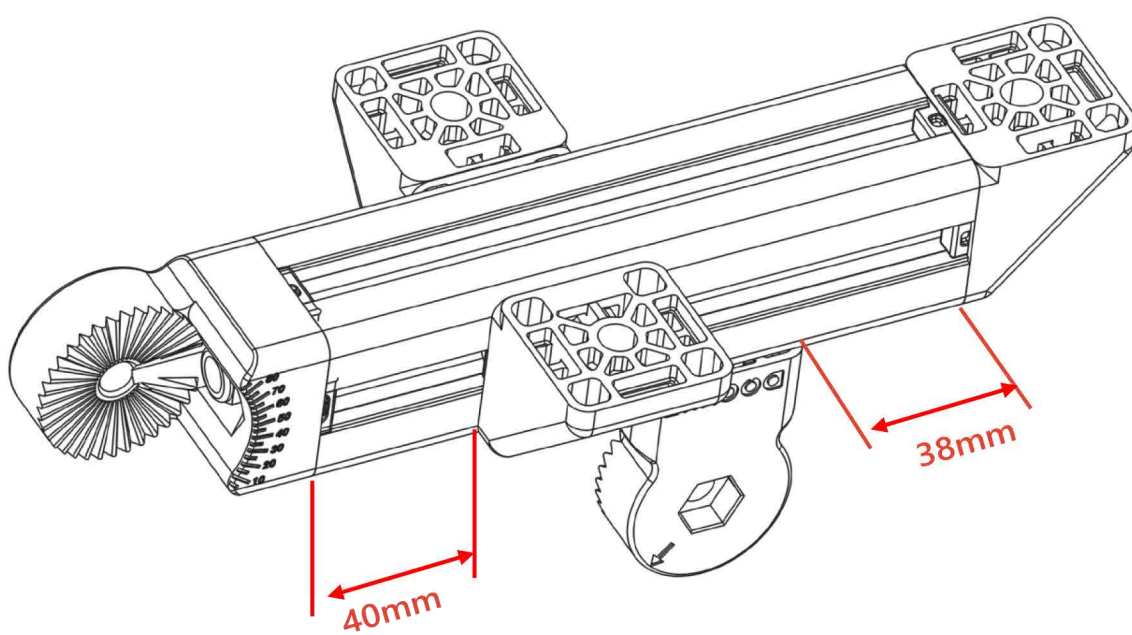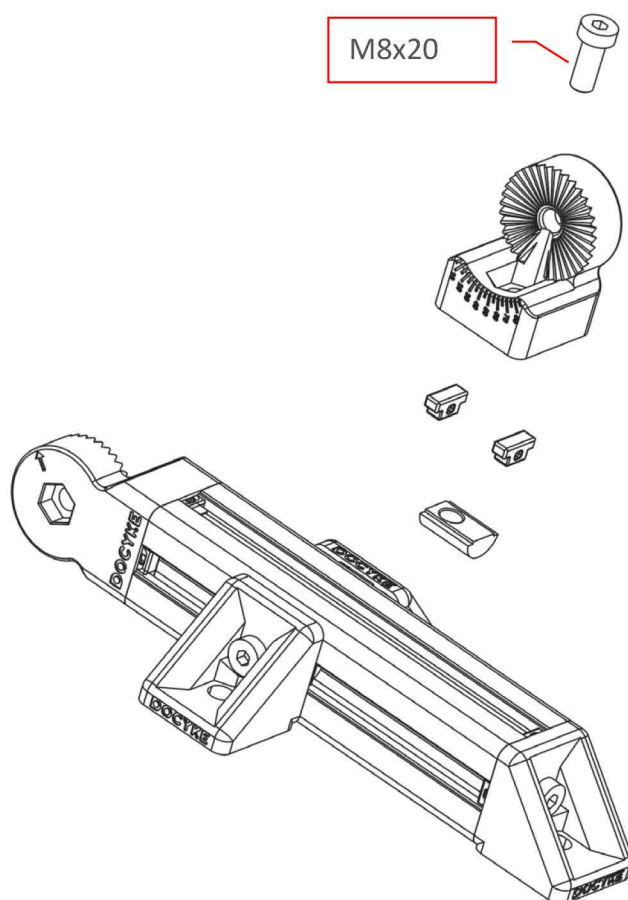


A

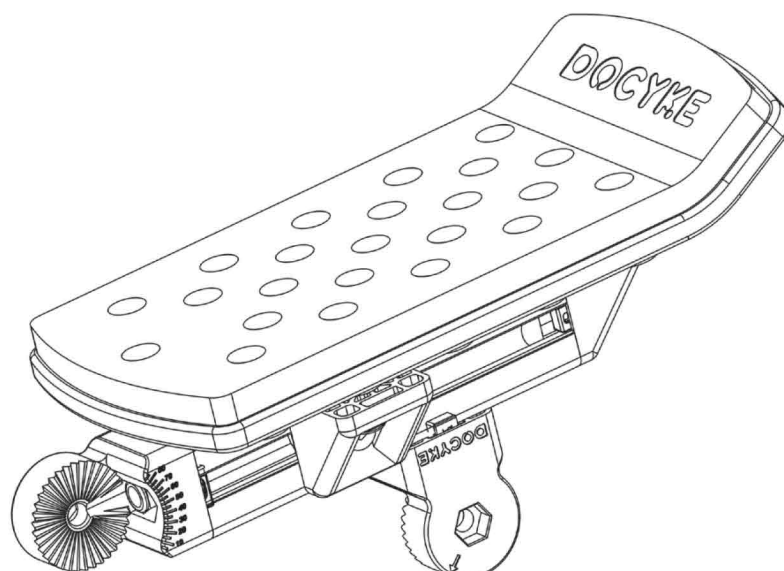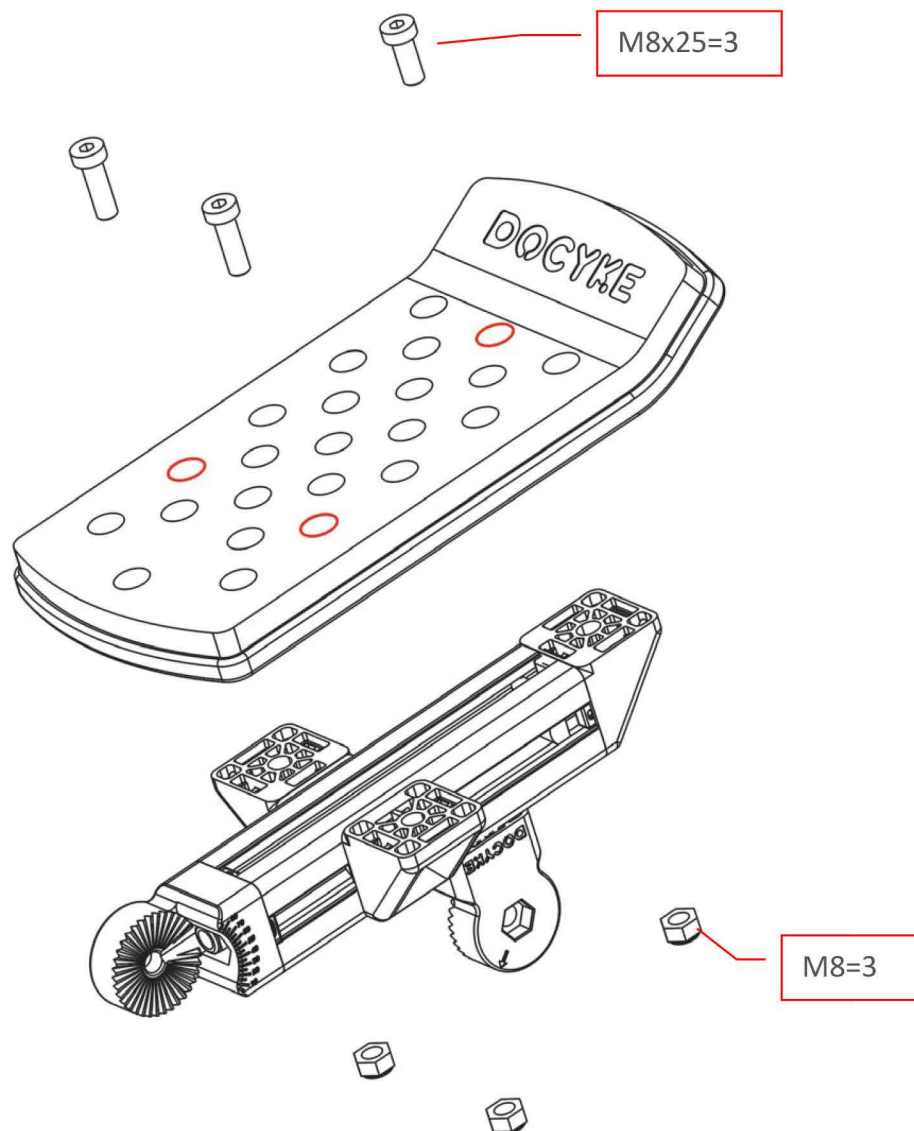


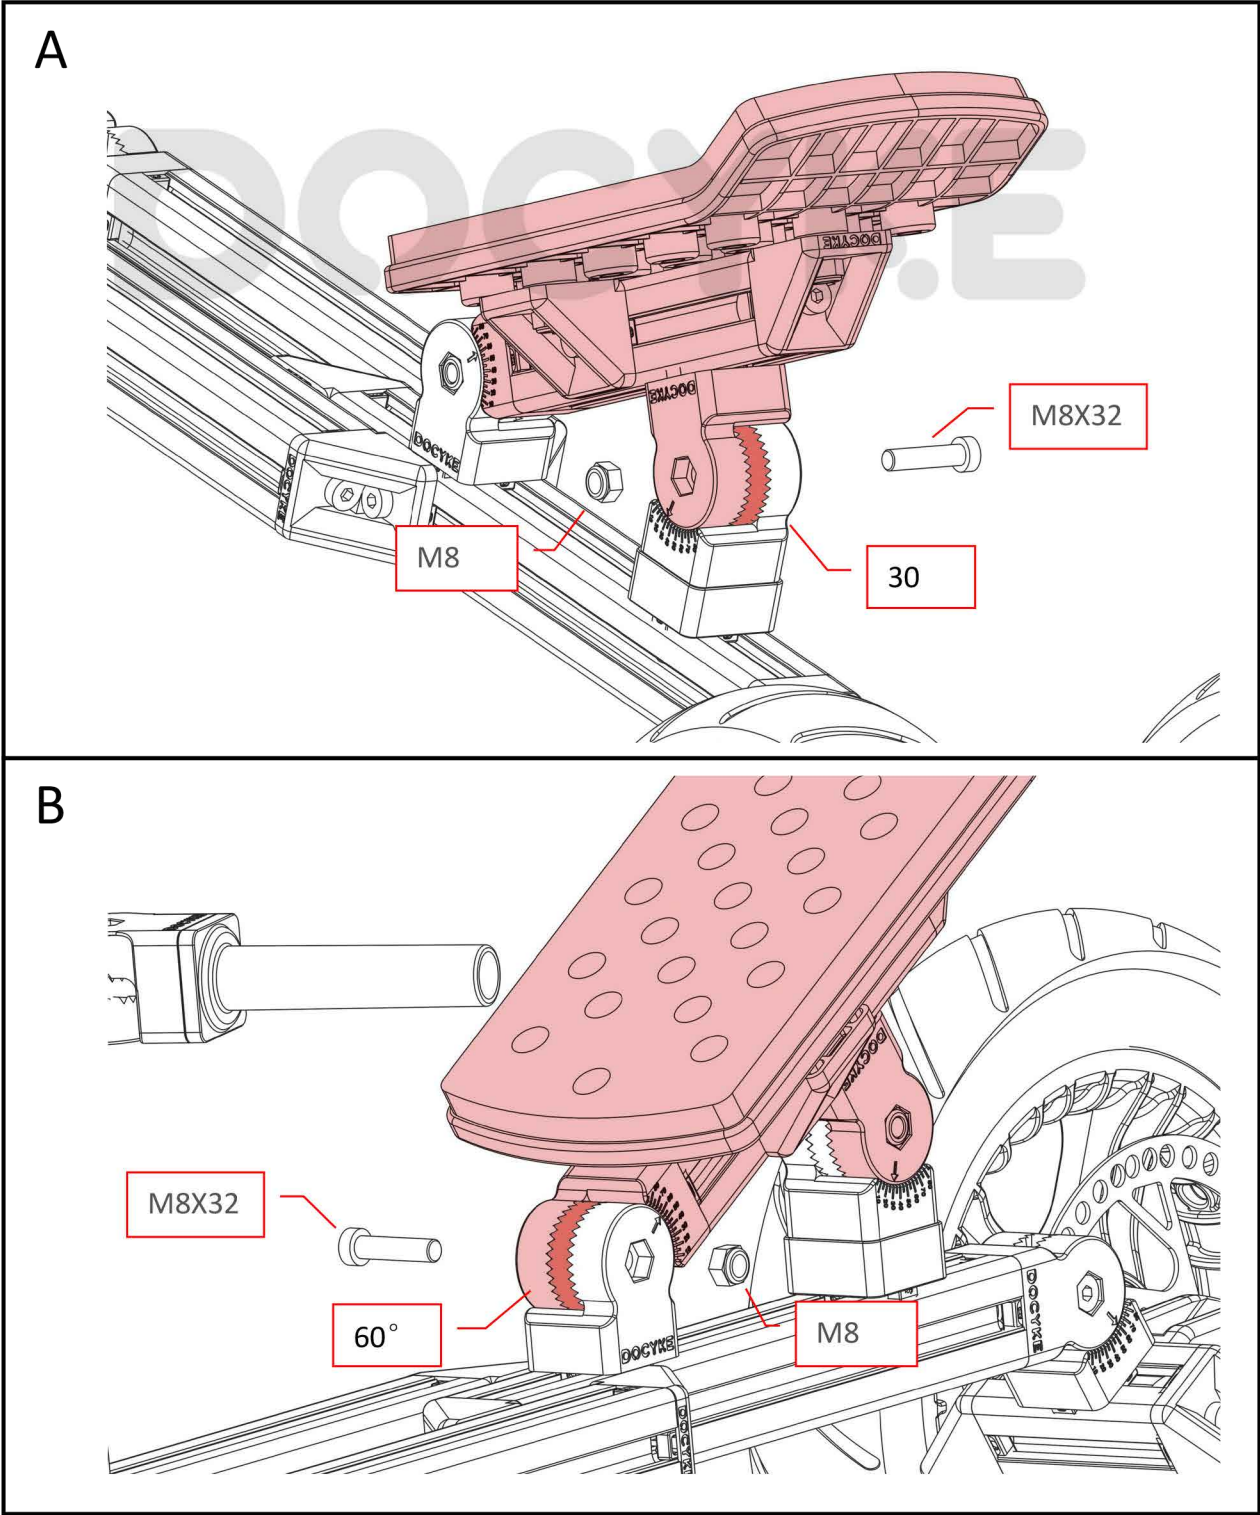


A

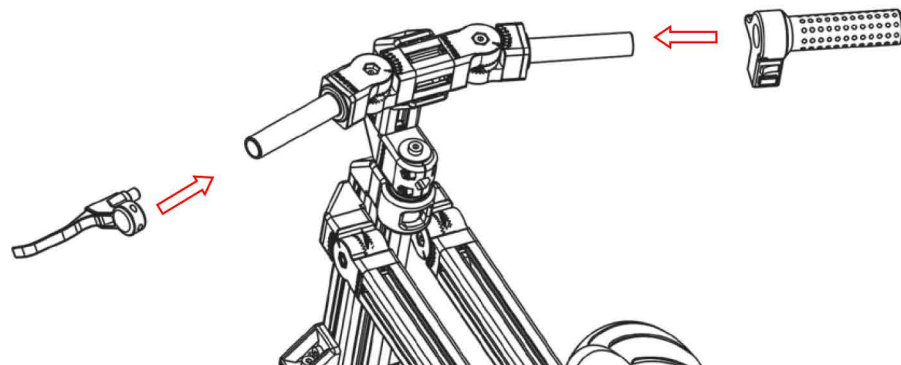



B

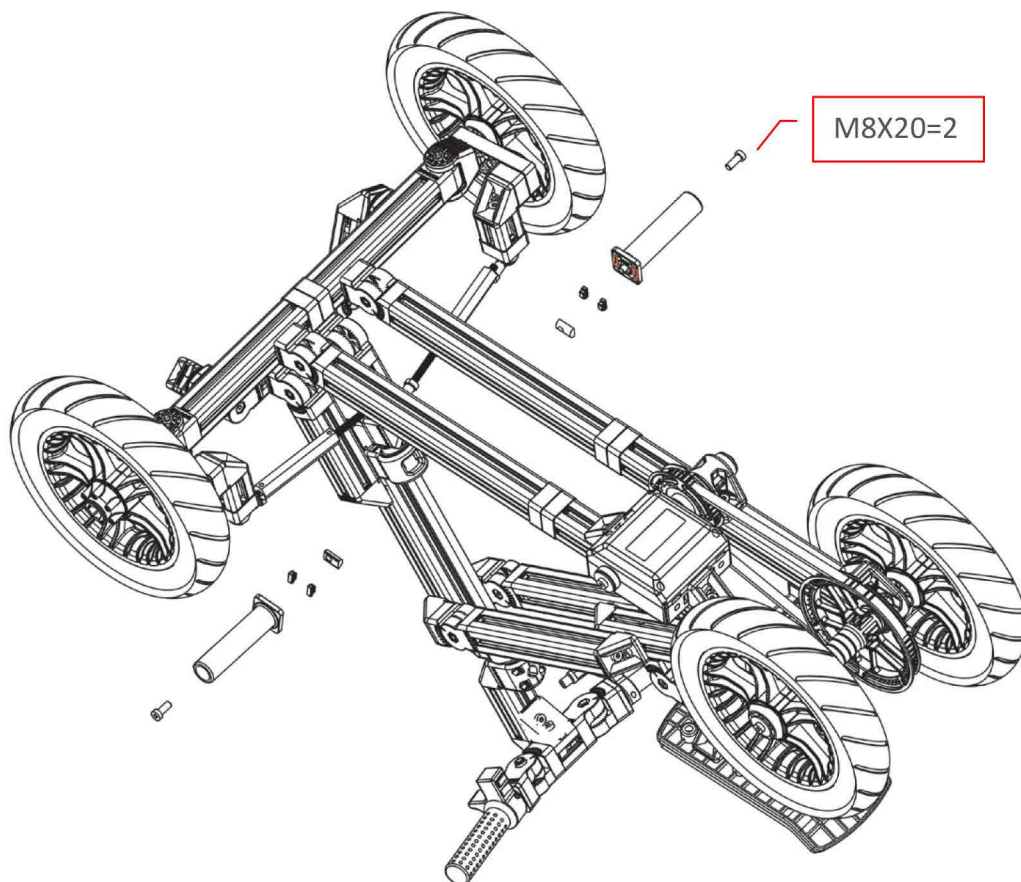


A

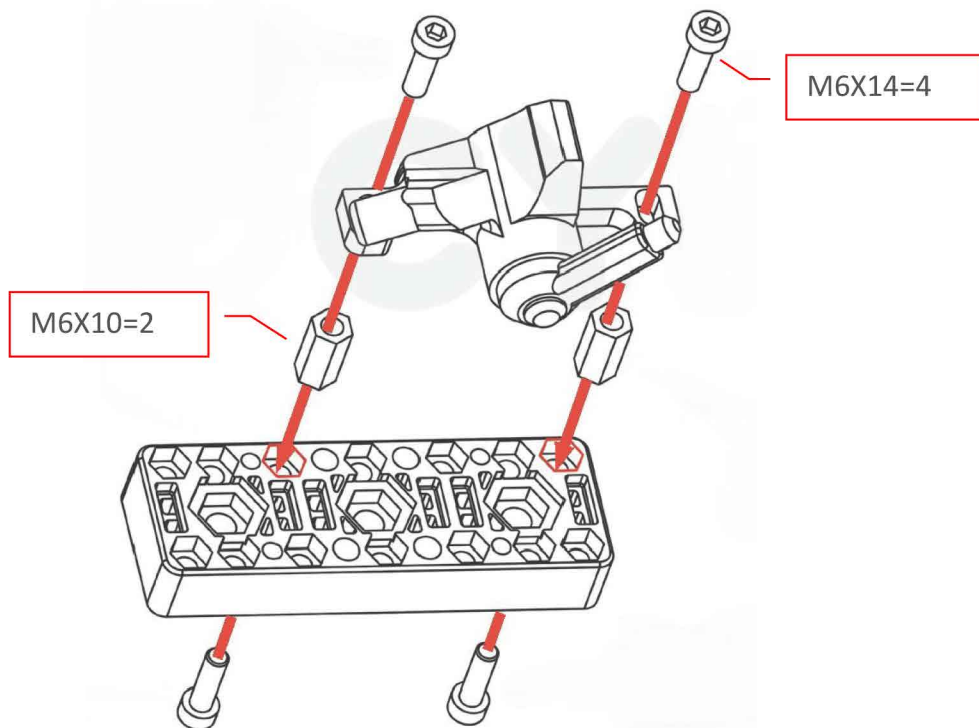


M8X20

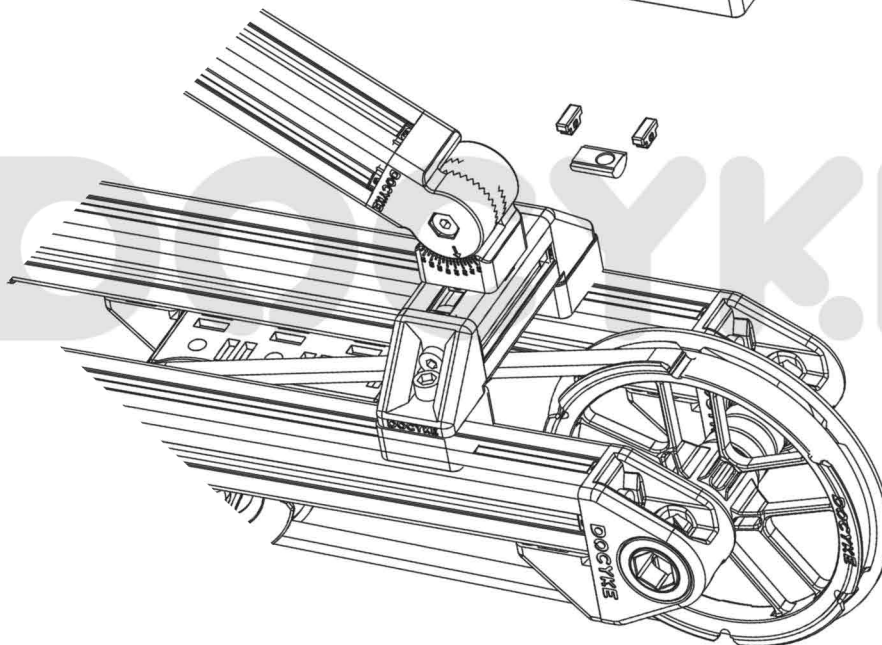



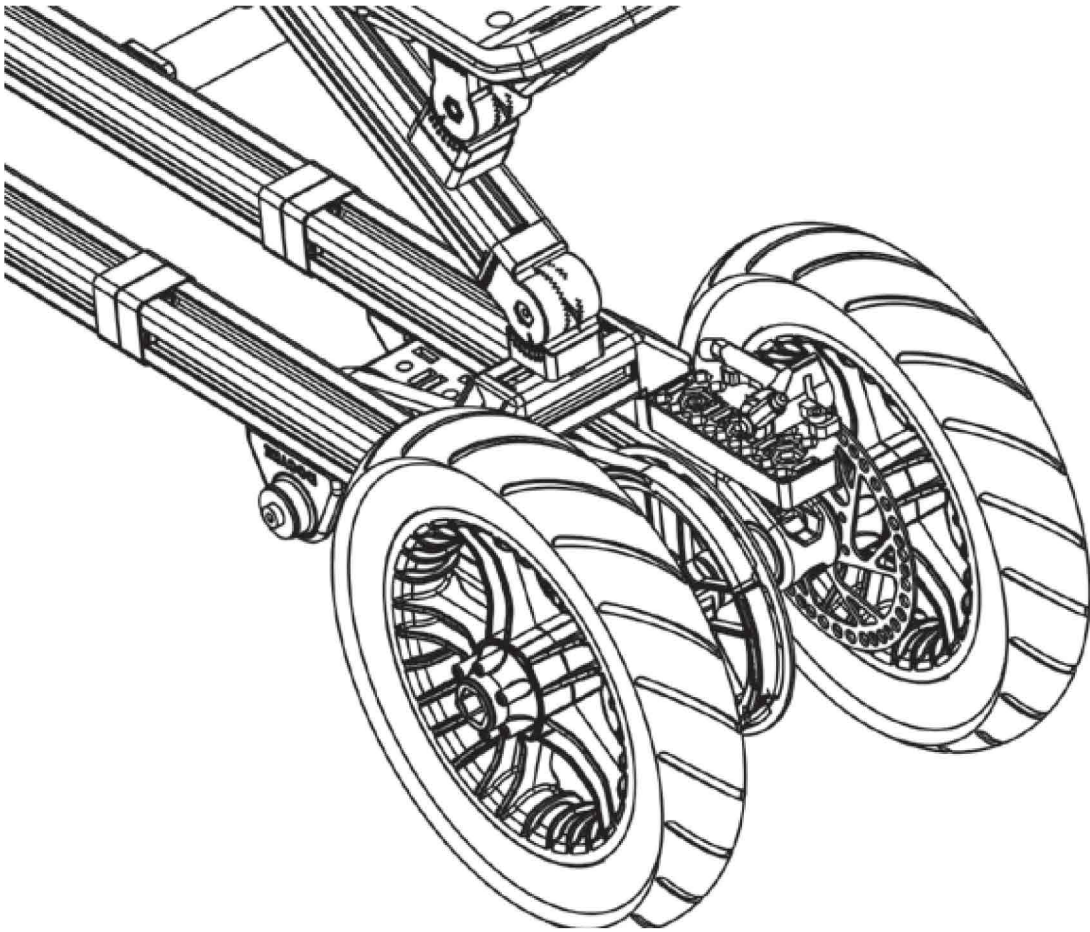


33

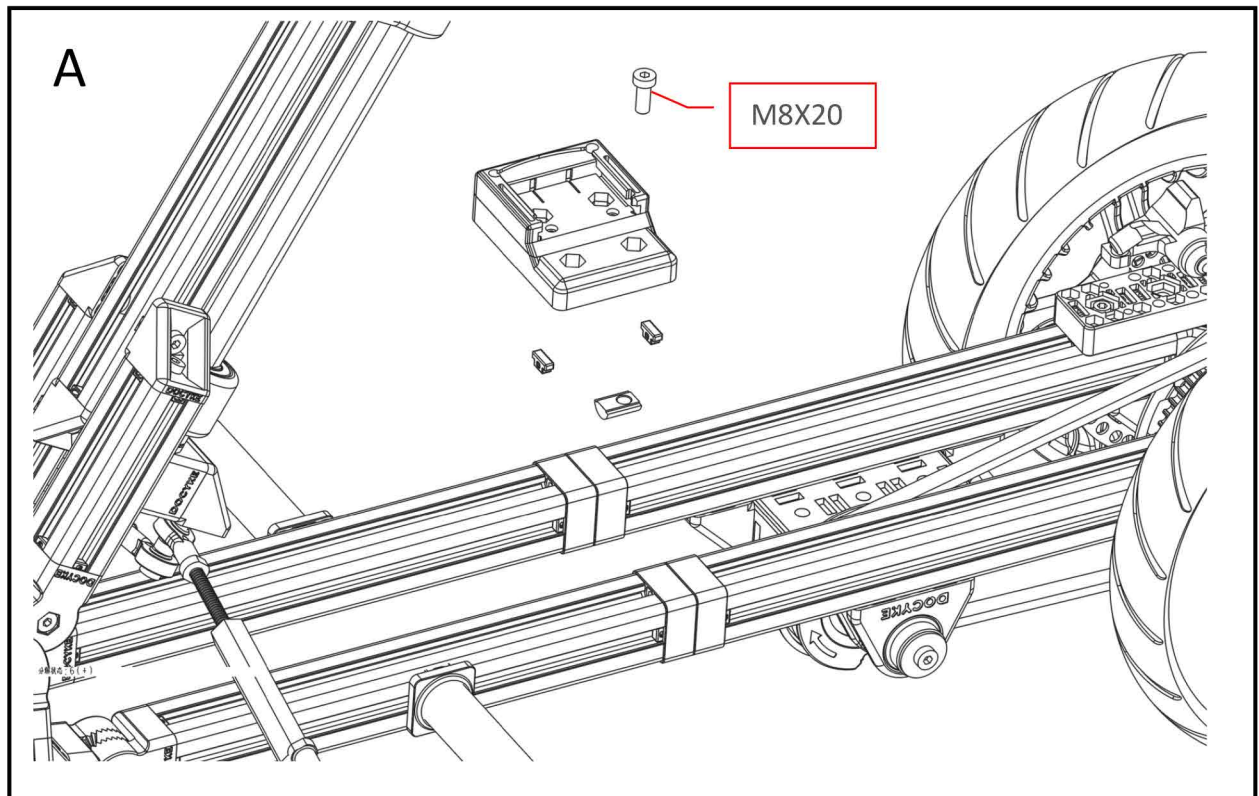


B

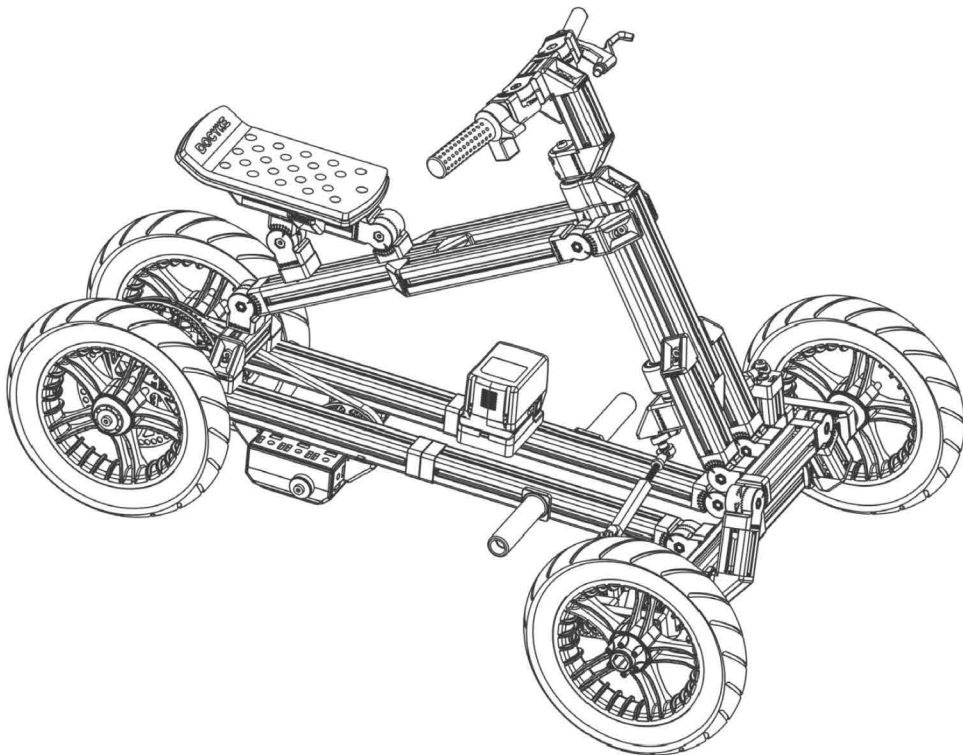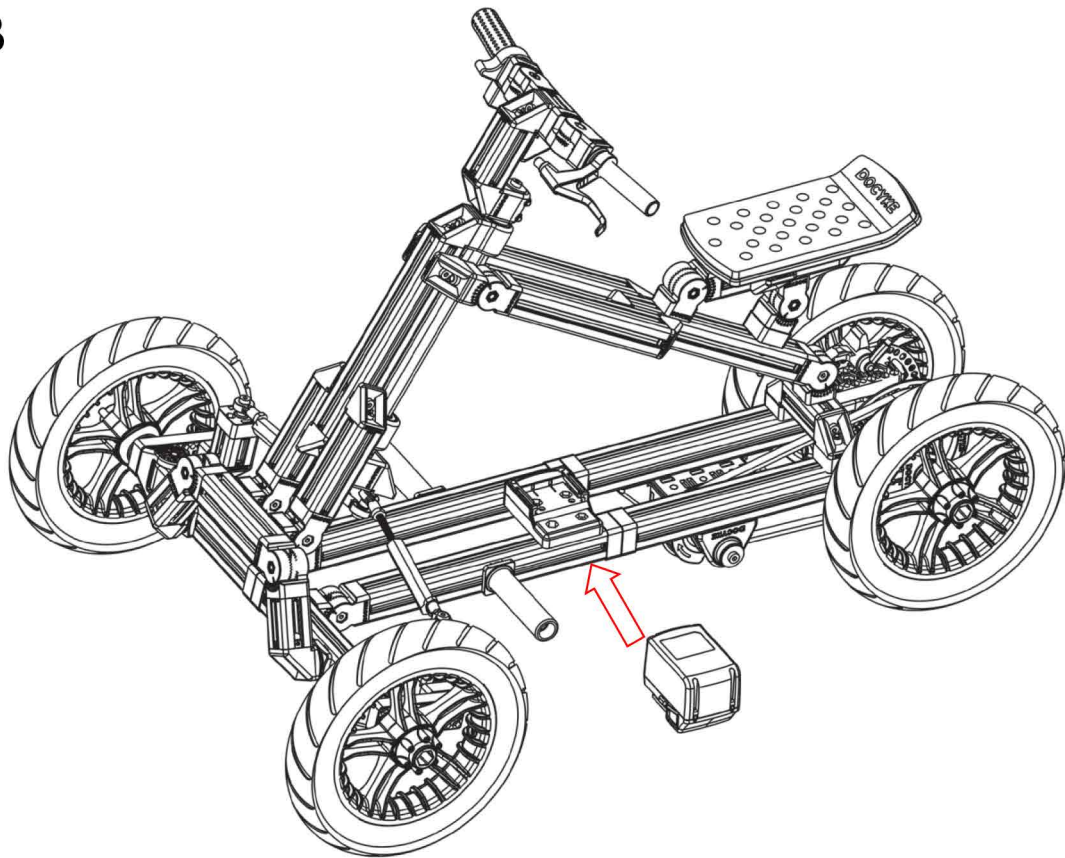

A

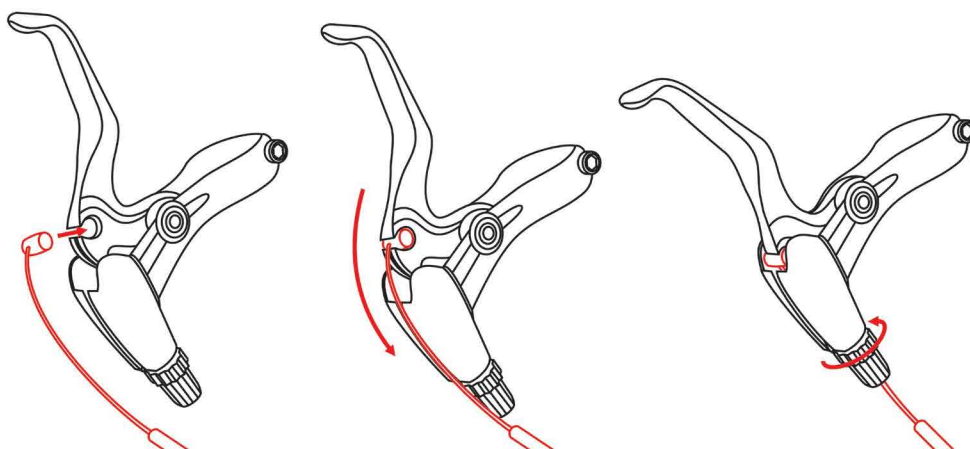

B

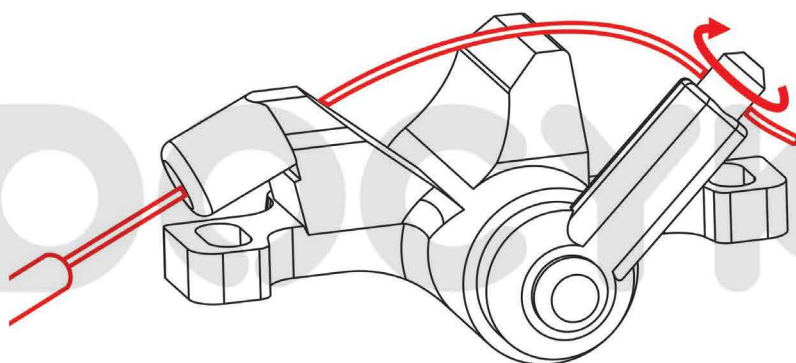

1.5m

