


PRODUCTS INSTALLATION INSTRUCTIONS

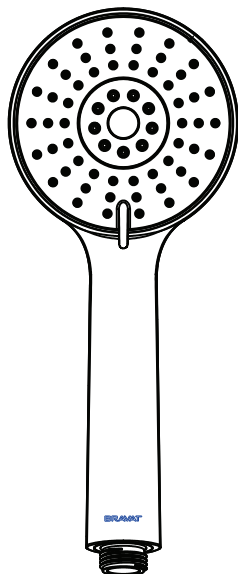

MODEL: AF-8100HS

Description: Hand Shower Set

GB

This technical product information is exclusively for the installer or trained specialists.

Please pass these instructions on to the users.

Application:

Operation with unpressurized storage heaters is not possible.

Products are used in indoor public places and residential.

Specifications

Flow pressure:

min. 0.05 MPa—recommended 0.1 – 0.5 MPa

Operating pressure:

max. 1.0 MPa

Test pressure:

1.6 MPa

Hot water inlet temperature:

max. 80 °C

Recommended(energy saving):

60 °C

Temperature:

5 °C ~ 45 °C

If static pressure exceeds 5 bar, a pressure-reducing valve must be fitted.

Avoid major pressure differences between hot and cold water supply. Care must be taken when installing to prevent damage to the incorporated flow controller.

Installation shall be in accordance with the AS/NZS3500 series of Standards.

**Color Code must be specified when ordering

AP Brushed Nickel

BW Spraying Black

CP Polished Nickel & Chrome

KVF Gold

NP Shining White

BAF Roman Golden



INSTALLATION DIMENSION

Unit:mm

