BRAVAT
BY DIETSCHE 1873

PRODUCTS INSTALLATION INSTRUCTIONS

MODEL: SH-8803
Description: Shower Head Set

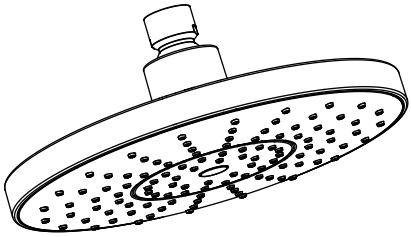

GB This technical product information is exclusively for the installer or trained specialists.
Please pass these instructions on to the users.

Application:
Operation with unpressurized storage heaters is not possible.
Products are used in indoor public places and residential.

Specifications

Flow pressure:	
min. 0.05 MPa—recommended 0.1 – 0.5 MPa	
Operating pressure:	max. 1.0 MPa
Test pressure:	1.6 MPa
Hot water inlet temperature:	max. 80 ℃
Recommended(energy saving):	60 ℃
Temperature:	5℃～45℃

If static pressure exceeds 5 bar, a pressure-reducing valve must be fitted.
Avoid major pressure differences between hot and cold water supply.Care must be taken when installing to prevent damage to the incorporated flow controller.

Installation shall be in accordance with the AS/NZS3500 series of Standards.

**Color Code must be specified when ordering

AP	Brushed Nickel
BW	Spraying Black
CP	Polished Nickel & Chrome
KVF	Gold
NP	Shining White
BAF	Romen Golden

A INSTALLATION DIMENSION
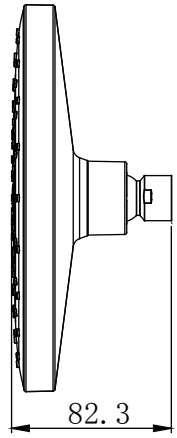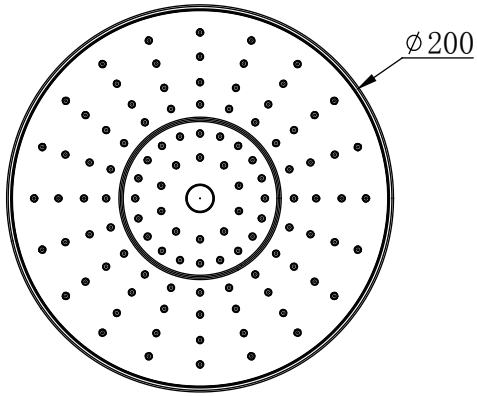
Unit:mm