


User's Manual



INSTALLATION INSTRUCTIONS

Installation Manual

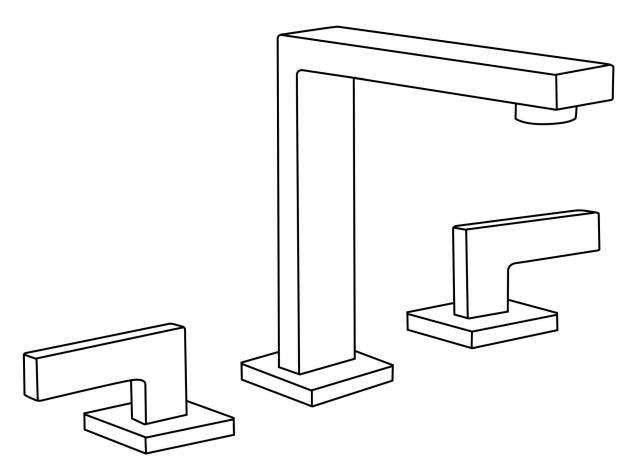

RB0727

IAPMO RESEARCH AND TESTING, INC.










CERTIFICATE OF LISTING

Plumbing Fixture Fittings

File No. 8737









IAPMO RESEARCH AND TESTING, INC.









CERTIFICATE OF LISTING







IAPMO RESEARCH AND TESTING, INC.

CERTIFICATE OF LISTING














INSTALLATION STEPS


This product has been inspected and debugged by the factory to the best condition. Please do not disassemble and assemble it yourself.



Before installing the faucet, please be sure to remove sundries and sludge from the water pipe to prevent sundries from blocking the faucet.




INSTALLATION MANUAL Tools You will need




Adjustable Wrench




Hexagon wrench




Philips Screwdriver




1.Remove the T-valve, lock nut and washer from the spout body. Place spout in center hole of sink. Assembly washer and tighten the lock nut to it. Connect the T-valve to the spout body using the wrench.




2. Remove mounting hardware from handle body. Connect water supply tube to valve body and tighten with lock nut. Do not allow the water supply brass trbe to twist. Use two wrenches, as shown in the diagram, tighten the flexible hose.



3.Place the spout in center hole of sink and handle body though right hole. (Left is red, right is blue). Assemble the rubber washer, washer and tighten with lock nut.



4.Connect handle body and faucet body with braided hoses. Tighten wrench tight.



5.Screw and tighten the flexible hose to the faucet. Left is red, right is blue. Do not allow the water supply brass tube to twist.

CLEANING CARE

In order to keep the appearance of faucet clean, bright and good performance, please take care of the faucet as follows;

- 1. Rinse with water only and dry with soff cotton cloth;
- 2.Use mild liquid and colorless glass cleaner to remove surface dirt and scale film, or use polish without abrasive effect;
- 3.Do not use abrasive deterfgent, polish, emery cloth, paper towel or scraper, etc.;
- 4.Do not use acid cleaner or cleaner and soap with insoluble gran etc.;
- 5.In the process of use, mud my accumulate in the bubbler and make the water flow show, The bubbler can be unscrewed, rinsed with water, and then installed back in place.







Service Contact:

+1(801) 800-9309 services@rbrohant.com

Made in China