


# **User's Manual**



# **Installation Manual**

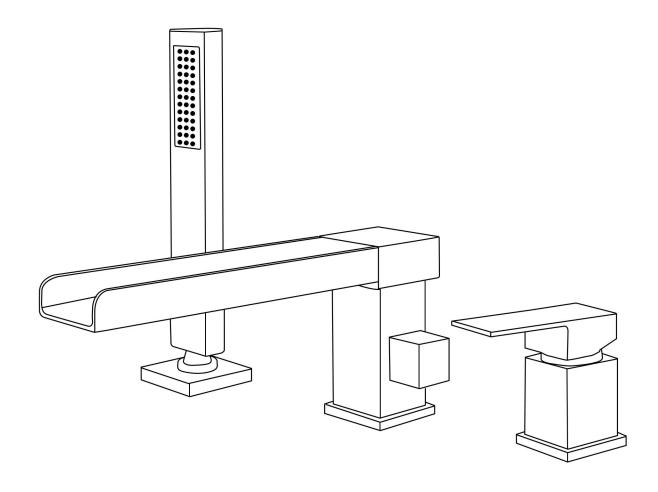

# **RB0728**











#### CERTIFICATE OF LISTING

File No. 8737

Plumbing Fixture Fittings







#### IAPMO RESEARCH AND TESTING, INC.









### CERTIFICATE OF LISTING







#### IAPMO RESEARCH AND TESTING, INC.














## **BEFORE INSTALLATION**

This product has been inspected and debugged by the factory to the best condition. Please do not disassemble and assemble it yourself.



Before installing the faucet, please be sure to remove sundries and sludge from the water pipe to prevent sundries from blocking the faucet.



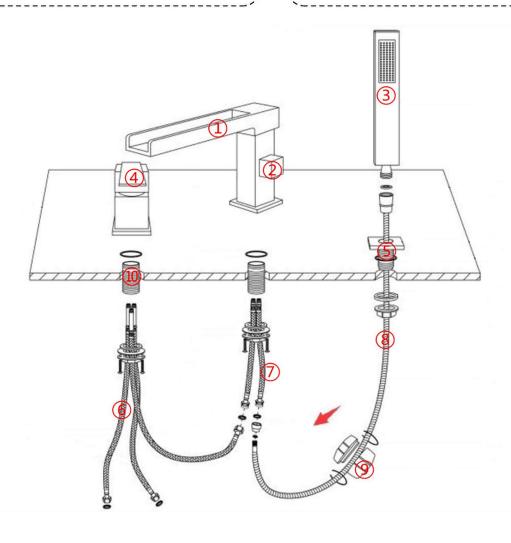

- 1)25cm tub spout
- **2) BATH and SHOWER switch**
- 3handheld shower head
- 4) Hot and cold water switch
- (5) handheld shower holder bracket

- 6 Hot and cold water inlet pipe
- 7 Connecting pipe
- **®1.5 m Shower hose**
- <sup>10</sup>Brass bracket

## Check accessories

Standard List of Accessories:

When you open the product packaing, please check whether the objects in it are consistent with the main body and accessories you purchased. If there is any inconsistency, please contact our company or our distributor.


Note: 1.Accessories are subject to change without prior notice if the change does not affect usage;

2. The appearance of the product is subject to the physical objects you receive, and the schematic diagram is only for reference.

# **INSTALLATION STEPS**

TIPS:

- ①Red as hot water pipe,Blue as cold water pipe
- ②Cleaning the hot and cold water inlet pipe to prevent debris from entering the inside, damaging the valve body and affecting the use.

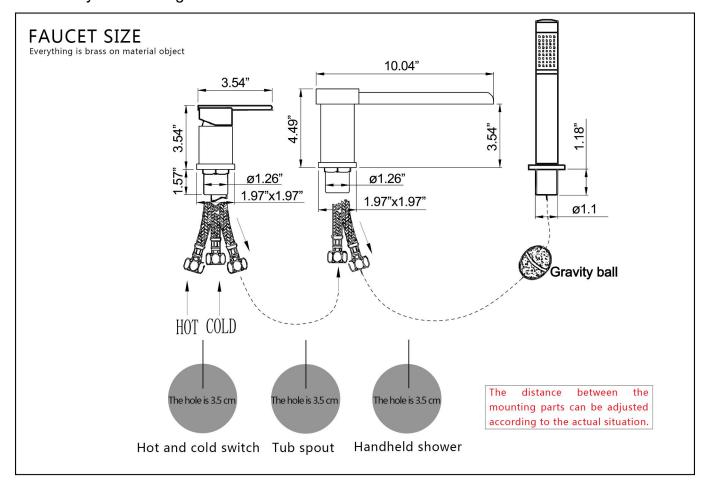

- 1.Take the tub faucet set in the corresponding hole on the bathtub. Fix the faucet body to the pipe.and put the base cover over the base.
- 2. Screw the pipe to the corresponding base.
  - ①Install the flexible hose and ensure the flexible hoses are hand tightened into place. The flexible hoses are to be fitted into the correct inlets for hot water and for cold water. (DO NOT USE SPANNER TO TIGHTEN AS IT CAN DAMAGE THE O-RING).
  - ②Connect another side of the flexible hose to the water supply pipe. Make sure they are to be fitted into the correct outlets for hot water and cold water.
  - ③Connect the shower hose and hand shower.
- 3. Finish.

#### **CLEANING CARE**

In order to keep the appearance of faucet clean, bright and good performance, please take care of the faucet as follows;



- 1. Rinse with water only and dry with soff cotton cloth;
- 2.Use mild liquid and colorless glass cleaner to remove surface dirt and scale film, or use polish without abrasive effect;
- 3.Do not use abrasive deterfgent, polish, emery cloth, paper towel or scraper, etc.;
- 4.Do not use acid cleaner or cleaner and soap with insoluble gran etc.;
- 5.In the process of use, mud my accumulate in the bubbler and make the water flow show, The bubbler can be unscrewed, rinsed with water, and then installed back in place.

Please feel free to contact us if you have any questions. We will help to solve the issue together with you. OUR EMAIL: services@rbrohant.com





Service Contact:

+1(801) 800-9309 services@rbrohant.com

Made in China