EAGLE STAR

Classical Standard LED Wall Pack

Product Description

Eagle Star LED wall pack series of luminaries provides an architectural style with super bright, energy efficient LEDs. The low-profile, rugged die-cast aluminum construction along with a sealed and gasketed optical compartment make the light impervious to contaminants. It is ideal for wall/surface. Typical applications include building entrances, multi-use facilities, apartment buildings, institutions, schools, stairways and loading docks.




- Voltage 100-277V AV 50Hz/60Hz
- Light Efficiency 130lm/w
- Lifespan above 50,000 hours
- Qualifed with CE, RoHS, cETL, ETL, DLC
- UL certificated LED driver
- 5 years warranty
- IP 65


- Heavy-duty cast aluminum housing is polyester powder coated to be rust and corrosion proof
- Sealed fixture is dirt and bug free
- Multiple knockouts for mounting convenience
- Photocell is available
- Die-casting aluminum alloy & PC
- Ambient temperature from -30°C to 50°C

Product Parameters


Product Parameters					
Input Power	40W	62W	80W	100W	120W
LED Chips	PHILIPS LEDS				
Initital Lumens	5,200lm	8,060lm	10,400lm	13,000lm	15,600
Efficacy	130lm/w	130lm/w	130lm/w	130lm/w	130lm/w
CRI	> 75Ra				
ССТ	5000k				
Beam Angle	110°*130°				
Input Voltage	100-277V AV 50/60Hz				
Working Temperature	-30°C Up to 50°C (-22°Fup to122°F)				
Certification	CE, RoHS, cETL, ETL, DLC				
Warranty	5 years				
Carton/Pieces	1	1	1	1	1
G.W	4.5kg	4.6kg	4.7kg	5.2kg	5.6kg
Carton Size	44*32*29CM	44*32*29CM	44*32*29CM	44*32*29CM	44*32*29CM

Dimensions






Photometrics

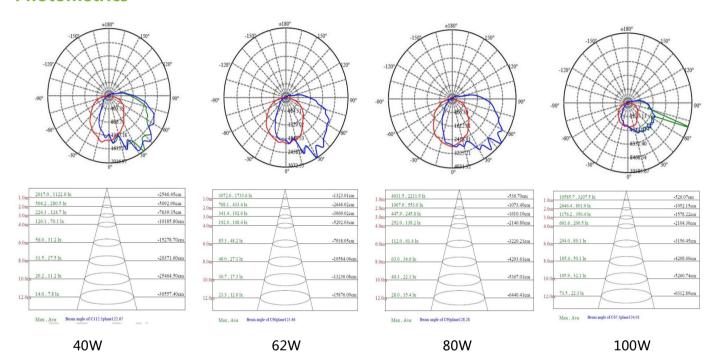

Installation

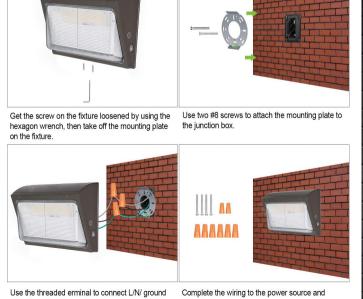

ground.

wire, dim+/dim-(if not, please ignore) separately.

