

0203 PM Coupler

C3010-P



2x2 780 nm PM Filter Coupler, 1/99

The coupler offers very low insertion loss, high return loss and high extinction ratio. It can be used for fiber sensor, fiber optical instrument, EDFA & raman amplifier.



FEATURES

- Low Insertion Loss
- High Return Loss
- High Extinction Ratio

USE IN

- EDFA & Raman Amplifier
- Fiber Sensor
- Fiber Optical Instrument

MECHANICAL DRAWING

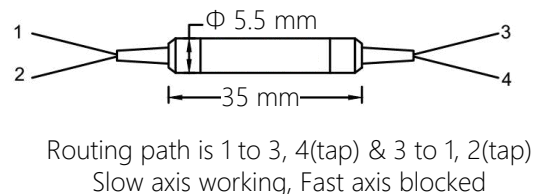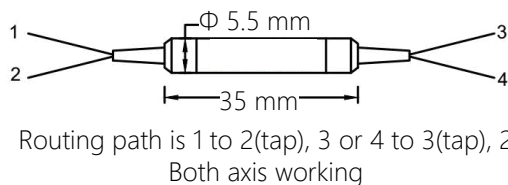

Type	2x2	
Center Wavelength	780 nm	
Operating Bandwidth Range	±10 nm	
Excess Loss	1.2 dB max.	
Coupling Ratio	01/99	
Extinction Ratio	Both Axis Working	20 dB min.
	Fast Axis Blocked	22 dB min.
Return Loss	50 dB min.	
Power Handling	500 mW max.	
Tensile Load	5 N max.	
Fiber Type	In & Out	PM Panda Fiber
	Tap	PM Panda Fiber or 780-HP or Specified
Operating Temperature	-5°C to +70°C	
Storage Temperature	-40°C to +85°C	

* With connectors, IL is 0.3 dB higher, RL is 5 dB lower, and ER is 2 dB lower.

Order notes to our customers: The default parameters are as follows. For special needs, please contact sales.

1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.

2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.