

0204 1xN Coupler Array

C9000-P

1x4 780 nm Polarization Maintaining Fiber Coupler Module

The C9000-P has low insertion loss, high return loss, high extinction ratio and high stability & reliability. It can be used for EDFA & raman amplifier, fiber sensor and fiber optical instrument and power monitoring system.


FEATURES

- High Return Loss
- Low Insertion Loss
- High Extinction Ratio
- High Stability & Reliability

USE IN

- EDFA & Raman Amplifier
- Fiber Sensor
- Fiber Optical Instrument
- Power Monitoring System

MECHANICAL DRAWING

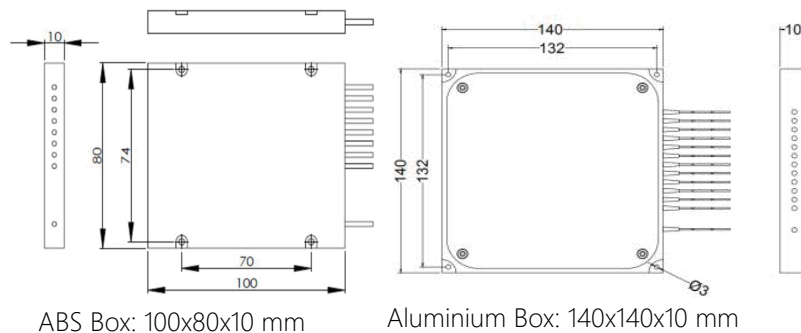

Center Wavelength	780 nm
Insertion Loss @23°C	8.5 dB max.
Wavelength Dependent Loss	0.8 dB max.
Extinction Ratio @23°C	Both Axis Working Fast Axis Blocked
	18 dB min. 22 dB min.
Return Loss	50 dB min.
Insertion Temperature Stability (-40°C to +85°C)	0.5 dB max.
Optical Power(CW)	300 mW max.
Tensile Load	5 N max.
Fiber Type	PM Panda Fiber
Package Dimensions	ABS Box Aluminium Box
	100x80x10 mm or 120x80x10 mm 140x140x10 mm or Customized
Operating Temperature	-5°C to +70°C
Storage Temperature	-40°C to +85°C