




OPT22-100

Calcium Fluoride (CaF₂) Optical Window

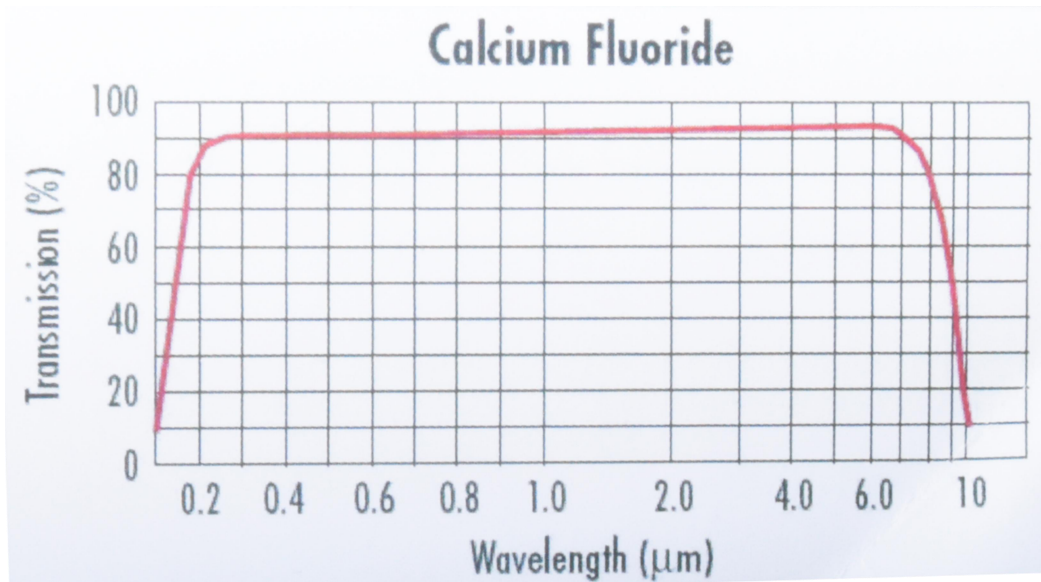

Diameter (mm)	Thickness (mm)	Waveband Range
5.0 mm	1.0 mm	250 nm to 7000 nm
10.0 mm	1.5 mm	250 nm to 7000 nm
12.5 mm	2.0 mm	250 nm to 7000 nm
15.0 mm	2.0 mm	250 nm to 7000 nm
20.0 mm	2.0 mm	250 nm to 7000 nm
25.0 mm	3.0 mm	250 nm to 7000 nm
30.0 mm	3.0 mm	250 nm to 7000 nm
40.0 mm	3.0 mm	250 nm to 7000 nm
50.0 mm	3.0 mm	250 nm to 7000 nm

Order notes to our customers: The default parameters are as follows. For special needs, please contact sales.

- 1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.
- 2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.