

# 0104 PM Circulator

R3000-P



## 2x2 1064 nm PM Fiber Circulator, 300 mW

The PM circulator is a compact, high-performance component, with low insertion loss and high return loss, isolation, stability and reliability. It is widely used in EDFA & Raman amplifiers, fiber sensors, testing instruments and medical equipment.


### FEATURES

- Low Insertion Loss
- High Return Loss
- High Isolation
- High Stability and Reliability

### USE IN

- EDFA & Raman Amplifier
- Fiber Instrument
- Fiber Sensor

### MECHANICAL DRAWING

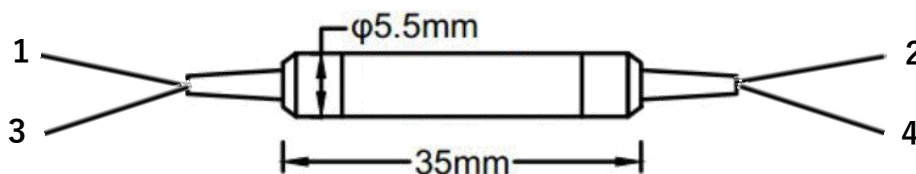

Configuration	Port 1 to Port 2, Port 2 to Port 3, Port 3 to Port 4
Center Wavelength	1064 nm
Operating Wavelength Range	±5 nm
Insertion	2.2 dB typ.; 2.5 dB max.
Isolation	30 dB typ. @Peak, 25 dB min.
Extinction Ratio	20 dB min.
Cross Talk	50 dB min.
Return Loss	50 dB min.
Power Handling	300 mW max.
Tensile Load	5 N max.
Fiber Type	PM Fiber
Operating Temperature	-5°C to +70°C
Storage Temperature	-40°C to +85°C
Dimension	5.5x5.5x35 mm

**Order notes to our customers:** The default parameters are as follows. For special needs, please contact sales.

**1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.**

**2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.**