

0205 1xN PLC Splitter

S2100-S



2x4 Planar Lightwave Circuit (PLC) Splitter

The planar lightwave circuit (PLC) splitter is a type of optical power management device that is fabricated using silica optical waveguide technology. It features a small size, high reliability, wide operating wavelength range and good channel-to-channel uniformity.


FEATURES

- Low Insertion Loss
- Low PDL
- Good Channel-to-channel Uniformity
- Compact Design
- Wide Operating Temperature: From -40°C to +85°C
- High Stability and Reliability

USE IN

- FTTX Systems
- PON Networks
- Optical Signal Distribution
- HFC Links

MECHANICAL DRAWING

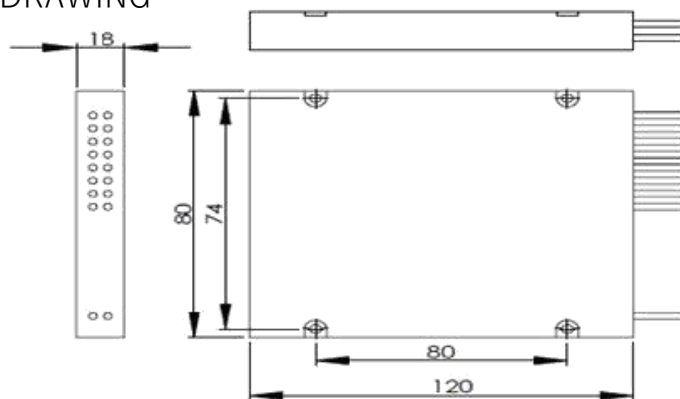

Unit: mm

Operating Wavelength	1260 nm to 1650 nm
Loss Uniformity	1.0 dB max.
Insertion Loss	7.3 dB
Return Loss	55 dB min.
Directivity	55 dB
Wavelength Dependent Loss	0.4 dB max.
PDL	0.2 dB max.
Temperature Stability (-40°C to +85°C)	0.5 dB max.
Operating Temperature	-20°C to +75°C
Fiber Type	G657A1
ABS Box Dimension	120x80x18 mm
Power Handling	500 mW max.

Order notes to our customers: The default parameters are as follows. For special needs, please contact sales.

1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.

2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.