

0605 1310 nm to 1610 nm WDM

W1048-S



1617 nm to 1623 nm Bandpass Filter, 2 Port

This bandpass filter utilizes thin-film technology to notch filter wavelengths of 1617 nm to 1623 nm, ideal for C-band EDFA ASE filtering. It offers low insertion loss, flat response, and high isolation.


FEATURES

- Low Excess Loss
- Flat Response
- High Isolation
- High Stability and Reliability

USE IN

- C-band EDFA ASE Filtering

FUNCTIONAL DIAGRAM

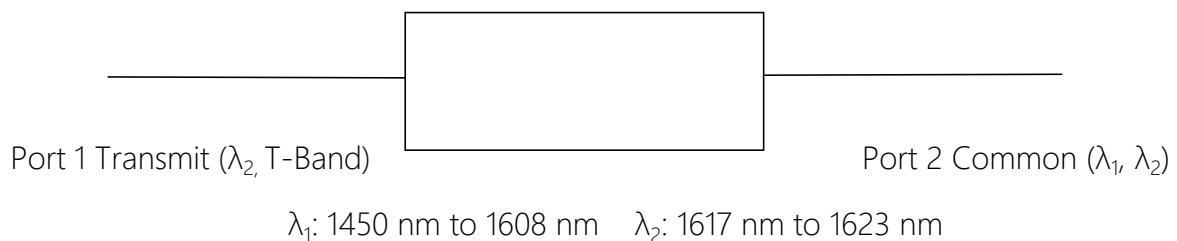

Insertion Loss	Port 2-1 @ λ_2	0.8 dB
Isolation	Port 2-1@1450 nm to 1608 nm	35 dB
Flatness	Port 2-1 @ λ_2	0.15 dB
Fiber Type	SMF-28, 9/125/250 μ m, No Connector	