

## 0701 Bare FBG

W8206-S



### 1535 nm/1540 nm/1545 nm/1550 nm/1555 nm FBG, Acrylate Coating, FCA-FCA

FBG(Fiber Bragg Grating) array is a series of Bragg grating written on a single optical fiber. It can meet the requirements for long monitoring and multi-points monitoring. It can improve stability and reliability, as well as simplify the system.


#### FEATURES

- No Splicing Point
- Customer Defined Grating Characteristics and Spacing
- High Stability and Reliability
- Long Fiber Distance

#### USE IN

- Distributed Sensing Measurement
- Wavelength Reference
- Aerospace Engineering
- Load Monitoring for Power Transmission

#### Spectrum

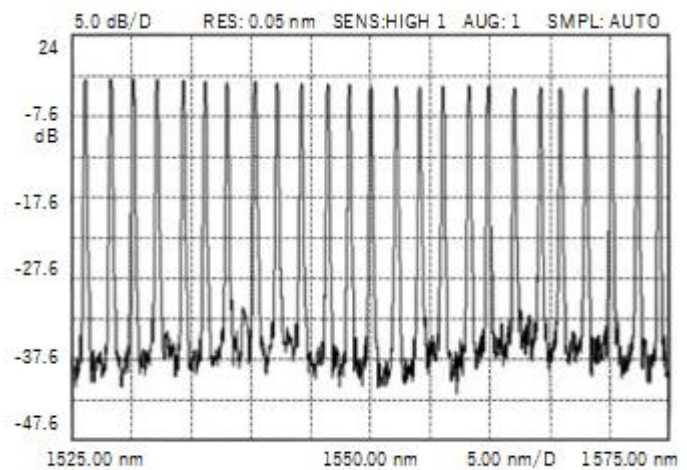

Center Wavelength	1535 nm/1540 nm/1545 nm/1550 nm/1555 nm			
Wavelength Tolerance	±0.5 nm			
FBG Length	3 mm	5 mm	10 mm	15 mm
Reflectivity	70% min.	75% min.	90% min.	90% min.
Bandwidth at -3 dB	0.7 nm max.	0.7 nm max.	0.3 nm max.	0.3 nm max.
SLSR	15 dB min.			
Spacing	10 mm min.			
Spacing Accuracy	1 mm max.			
Proof Test	100 Kpsi min.			
Fiber Type	SMF-28e or Polyimide Fiber			
Fiber Termination	FCA-FCA			
Storage Temperature	-40°C to +120°C			

**Order notes to our customers:** The default parameters are as follows. For special needs, please contact sales.

**1) Connector FC/APC, 900 um, 1 m by default for all devices except for high power devices.**

**2) Slow axis working, fast axis blocked, connector key is aligned to slow axis by default for PM devices.**