


CARBON DIOXIDE DETECTOR

PTH-9C




USER MANUAL

Product Introduction

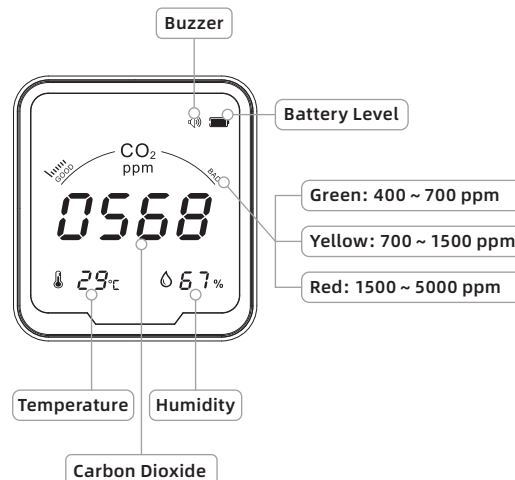

01

TYPE-C Charging
(5 V=1 A)

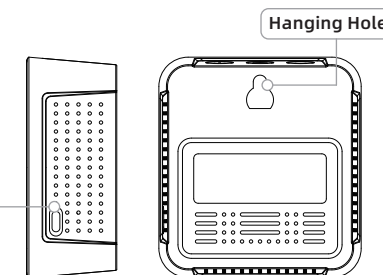

Specification

Carbon Dioxide Range: 400 ~ 5000 ppm
 Temperature Range: -10°C ~ 40°C (±1°C) / 14°F ~ 104°F (±1.8°F)
 Humidity Range: 20 ~ 80 % RH
 Produce Size: 98 × 90 × 40 mm
 Power Supply: Built-in Lithium Battery (2400mAh)
 Input: 5 V=1 A
 Packing List:
 PTH-9C × 1; User Manual × 1; USB Cable × 1


02

Operation

Press to turn on/off the backlight in the normal mode, or to minus one in the setting mode.

Double click it to custom CO₂ alarm threshold.

Long press it to turn on or off.



Press to switch °C or °F in the normal mode, or to plus one in the setting mode.

Long press it to turn on or off the buzzer.

After powering off, long press the 3 buttons to enter calibration mode then the device begins to count down 200s on the screen. Pay attention to doing it outdoors without people.

Note: When the carbon dioxide concentration value exceeds 1500ppm, and when the buzzer is on, the buzzer will sound an alarm. Long press "+" button to stop the alarm.

03

Customize Sound Alarm Value

Tips:

You can customize the sound alarm value for this meter.

How to set the sound alarm value?

Double click "0" to enter the setting. Then click "+" or "-". Click "0" to confirm setting and go back to home page.

04

Limited Warranty

Note:

1. Do not expose this product to water, nor place it in a high temperature environment exceeding 60°C, and keep it away from fire;
2. This product is a precision measuring instrument, and it is not allowed to disassemble the machine without authorization;
3. Can not be placed in an environment full of dust or corrosive gas for measurement;
4. When measuring the environment in the car, please do not expose this product directly to the sun for a long time.

1 year warranty against any manufacturing defects or faulty workmanship. This warranty does not cover fuses, disposable batteries or damage from accident, neglect, misuse, alteration, contamination or abnormal conditions of operation or handling.



WEEE Directive 2012/19/EU At the end of the product life, dispose of the instrument & batteries in a corresponding recycling centre. Do not dispose of the unit with the usual domestic refuse. Do not burn the product.

1 YEAR
GUARANTEE
Made in China



05