



# QUICK START GUIDE



# Introduction

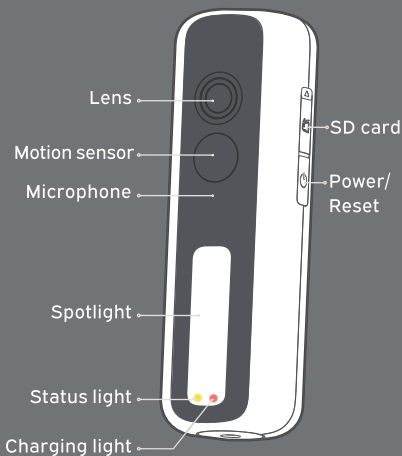

# Introduction

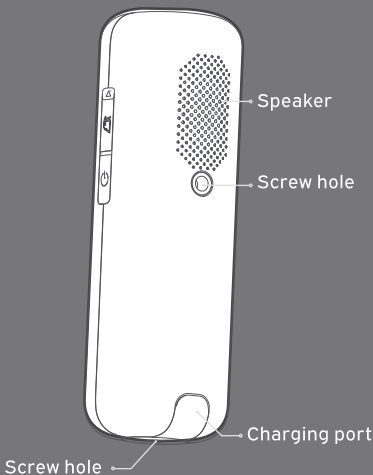

# Quick setup

## 1 Download the Reli Up App

The **Reli Up** App can be downloaded through App Store or Google Play by searching **Reli Up**. Or scan the QR code to download the **Reli Up**. Follow the in-app instructions to sign in or create an account.



Please note: Reli Up App is only compatible with Android 9.0, iOS 12.0 or above, otherwise the App may not be functional.

## Quick setup

2

### Set up and connect your camera

Open the Reli Up app and swipe right on the home page, tap "Add a new device" on the top of the device page.



Add a new device



Reli Light Cam Battery D1 >

Choose a method to connect the camera.  
Please note: ONLY 2.4GHz Wi-Fi OR hotspot,  
5GHz Wi-Fi is NOT supported.

3

### Let's get started!

After setup, tap the live button in the app to see the video from your camera.

# Install on the wall


## 1. Using self-tapping screws

(This method is suitable for cement walls or similar surfaces.)


- a** Select a suitable installation location, stick the install paper and use an impact drill to drill two holes with a diameter of approximately 6 mm.

Insert the 2 expansion tubes into each hole, respectively.

- b** Fix the mounting bracket to the wall with the self-tapping screws.



C Place the camera on the wall mounting bracket and tighten the bottom screw.

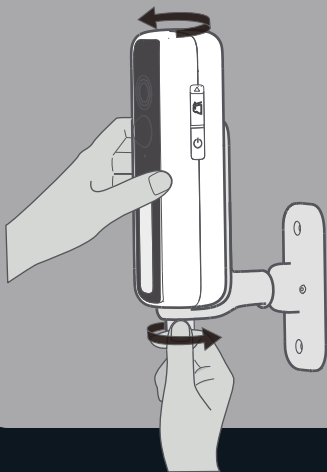

Note: Please use the included expansion tubes and self-tapping screws for installation.

# Install on the wall

## 2. Using double-sided tape


(This method is suitable for smooth marble, wooden or metallic surfaces.)

- a Clean the installation location so that it is flat, smooth, and dust-free.
- b Peel off the release liner from the double-sided tape and stick the mounting bracket on the selected location, press down firmly on the mounting bracket for 30 seconds to ensure it is installed securely.





- C** Place the camera on the mounting bracket and tighten the bottom screw.



### 3. Adjust the camera angle

- a** After installing the camera, tap the live button to see if the angle is suitable.
- b** The viewing angle of the camera can be adjusted by adjusting the mounting bracket.

# Where you can use D1

(Accessories need to be purchased additionally)

## 1. Installed in the yard

- a Connect the camera and the ground stand through the nut at the bottom of the camera.
- b Face the camera to the area you want to monitor.
- c Insert the stand into the ground.



# Where you can use D1

(Accessories need to be purchased additionally)

## 2. Installed on a tree

- a Connect the camera and the strap mount through the nut at the back of the camera.
- b Wrap the strap mount around a branch.
- c Tighten the strap mount.



# Where you can use D1

(Accessories need to be purchased additionally)

## 3. Installed on a baby's crib

- a Connect the camera and the tripod bracket through the nut at the back or the bottom of the camera.
- b Secure the bracket.

Note: We do recommend to turn off the spotlight when facing the babies.




# Where you can use D1

(Accessories need to be purchased additionally)

## 4. Installed on a table

- a Connect the camera and the desk and fence stand through the nut at the bottom of the camera.
- b Clip the clip to the edge of the table or fence.
- c The angle can be adjusted by bending the rod.

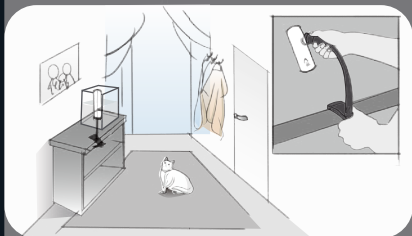

# Lights

## Status light

- Flashing yellow light: waiting for connection
- Solid blue light: connected

## Charging light

- Red light: charging
- Green light: charging completed




Status light

Charging light

## Power on, reset, or power off your device

### Power on your device

Press and hold the  button on the right of the device, you will hear the voice prompt "Welcome to the Reli Light Cam Battery D1".

### Reset your device

Make sure your device is powered on, press and hold the Power button until your device prompts that reset successfully.

### Power off your device

Press the Power button and your device will prompt that it is shutting down.

## What's in the box

Reli Light Cam Battery D1, Mounting Bracket, Screw Packs, Charging Cable, Quick Start Guide, Frequently Asked Questions, Security Sign, Screw Hole Positioning-Card, Double Sided Tape.

# Specifications

Name:	Reli Light Cam Battery D1
Model:	FJ11HWXJ
Battery Capacity:	7800 mAh(TYP)
Rated Input:	Max 5V --- 2A
Resolution:	1920 * 1080
Lens Viewing Angle:	155°
Storage:	Cloud storage, SD card
Audio System:	Two-way audio
Night Vision Lights:	white lights * 12 infrared lights * 4
Operating Temperature:	-20℃~50℃ (-4℉~122℉)
Compatible with:	Android 9.0, iOS12.0 or above
Wireless Connectivity:	Wi-Fi IEEE 802.11 b/g/n 2.4GHz



# Precautions

1. The camera only supports 2.4 GHz wireless networks.
  2. Please install the camera in areas within the range of the Wi-Fi coverage, and try to place the camera where the Wi-Fi signal is strong.
  3. Avoid exposing the lens to direct sunlight to prevent recording abnormal images.
  4. When enabling or disabling night vision, the infrared cut-off filter is switched, and the camera makes a slight clicking sound. This is normal.
  5. This camera is for residential use only, do not use it for illegal purposes.
  6. This device is equipped with a built-in battery that can not be removed or replaced. Do not disassemble or modify the battery by yourself.
  7. Do not use the battery after it is soaked in water.
- Note: Illustrations of the product, accessories, and user interface in the user manual are only for reference purposes. The actual product and functions may vary due to product enhancements.

## Warning

1. Only use batteries approved by the manufacturer. Replacement of the wrong type of battery may result in failure of safety protection and risk of explosion, fire, etc.
2. Do not put the battery in an extremely high-temperature environment, such as sunshine, fire, microwave oven, oven, etc. High temperatures may cause an explosion or leakage of flammable liquid or gas.
3. Do not disassemble, squeeze or cut the battery. It may cause an explosion.
4. Do not place the battery at extremely low pressure, which may cause the battery to explode or leak flammable liquids and gases.
5. Do not continue to use the battery if it is severely swollen.
6. Do not swallow batteries, which can cause chemical burns.

## Warning

7. If you think the battery may have been swallowed or placed in any part of the body, seek medical help immediately.
8. If the battery compartment is not securely closed, discontinue using the product and keep it away from children.
9. Keep children away from new and used batteries.
10. Please do not throw the battery anywhere. Please comply with the relevant national regulations, the safe disposal of used batteries.
11. If this product contains button batteries, do not swallow. Swallowed button batteries can cause severe internal burns and potentially death within 2 hours.

## FCC Warning

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.

## FCC Warning

3.Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

4.Consult the dealer or an experienced radio/TV technician for help.

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules. The equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## IC Warning

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) L'appareil ne doit pas produire de brouillage;
- (2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

## IC Warning

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la section 2.5 de RSS 102 et la conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne sur l'exposition et la conformité de rf.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

Cet émetteur ne doit pas être Co-placé ou ne fonctionnant en même temps qu'aucune autre antenne ou émetteur.

Cet équipement devrait être installé et actionné avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

# NEED HELP ?



Scan the QR code to learn more

Reli Technologies LLC

Contact us: [service@reliup.com](mailto:service@reliup.com)

919 N Market St Suite 950, Wilmington,  
DE 19801

[www.reliup.com](http://www.reliup.com)



@ReliGlobal



@ReliGlobal