

Product Specifications

Receiving card

HD-R508T

V0.1 20210525

Shenzhen Huidu Technology Co., Ltd

www.huidu.cn

1



1. Overview

R508Ton-board 8*HUB75E ports, compatible with R series receiving card, it work with asynchronous sending card, synchronous sending card and all-in-one LED controller.

2. Parameters


| With sending | Dual-mode sending box, Asynchronous sending card, | | | |
|------------------------|--|--|--|--|
| card | Synchronous sending card, Video processor of VP series. | | | |
| Module type | Compatible with all common IC module, supported most PWM IC module. | | | |
| Scan mode | Supports any scanning method from static to 1/64 scan | | | |
| Communication method | Gigabit Ethernet | | | |
| Control range | Recommend: 65,536 pixels (128*512) | | | |
| | Outdoor module width \leq 256, Indoor module width \leq 128 | | | |
| Multi-card | Receiving card can be put in any sequence | | | |
| connection | | | | |
| Gray scale | 256~65536 | | | |
| Smart setting | A few simple steps to complete the smart settings, through the screen layout can be set to go with any alignment of the screen unit board. | | | |
| Test functions | Receiving card integrated screen test function, Test display brightness uniformity and display module flatness. | | | |
| Communication distance | Super Cat5,Cat6 network cable within 80 meters | | | |
| Port | 5V DC Power*2,1Gbps Ethernet port*2, HUB75E*8 | | | |
| Input voltage | 4V-6V | | | |
| Power | 5W | | | |
| 10000 | | | | |

www.huidu.cn




3. Connection method

Connection diagram of connecting R508T with player A6:

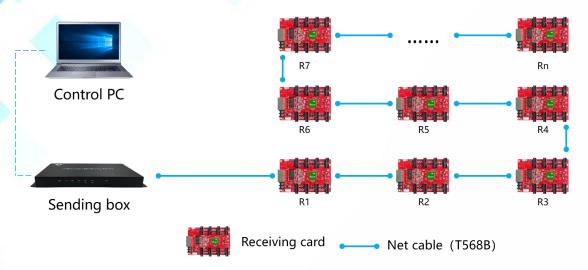


4. Dimensions

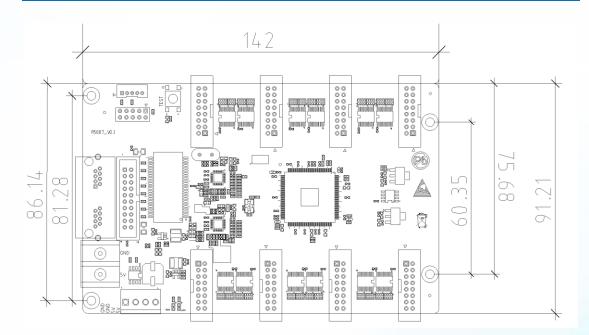




5. Interface definition



6. Appearance Description

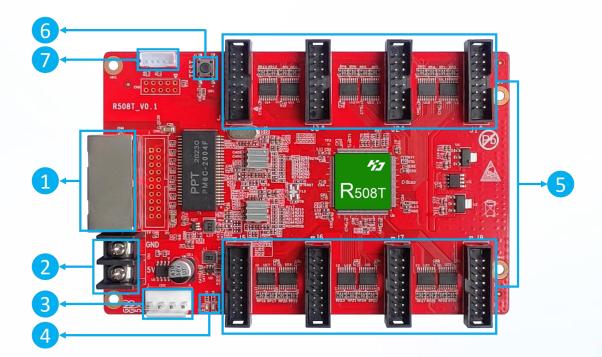

(1): Gigabit Ethernet port, used to connect the sending card or receiving card, the same two network ports are interchangeable,

(2): Power interface, can be accessed with $4.5V \sim 5.5V$ DC voltage;

4

(3): Power interface, can be accessed with $4.5V \sim 5.5V$ DC voltage; (\emptyset , \Im connect one of them is ok.)

(4): Work indicator, D1 flashes to indicate that the control card is running normally; D2 flashes quickly to indicate that Gigabit has been recognized and data is being received.

(5): HUB75Eport, connect to the modules,

灰度科技

(6): Test button, used to test display brightness uniformity and display module flatness.

(7): External indicator light, run light and data light.

| | Minimum | Typical | Maximum | |
|-------------------------------------|---------------|---------|---------|--|
| Rated voltage(V) | 4.2 | 5.0 | 5.5 | |
| Storage temperature(°C) | -40 | 25 | 105 | |
| Work environment temperature(°C) | -40 | 25 | 80 | |
| Work environment humidity (%) | 0.0 | 30 | 95 | |
| Net weight (kg) | ≈0.086 | | | |
| Certificate | CE, FCC, RoHS | | | |

7. Technical Parameters

Precautions

1) ensure the system long-term stable running, please keep to use the standard 5V power supply voltage.

2) Different production batches, color appearance and labels may be different.