

Specification

4-Network-Port Controller TS952Plus

V1.3 2018.SEP

Summary:

TS952Plus is a controller with four network ports, and supports single, double and full color LED screen. Its capacity is 2.6 million pixels and supports cascade function. In addition, it auto-adjusts brightness via connecting with an extra light sensor

Official website: www.linsn.com


Add: Floor 15&16, Jiajiahao Business Building, No. 10168, Shennan Blvd,
Nanshan District, Shenzhen

Tel: +86-0755-86183590/ 4008836968

Features:

- 1) One Audio signal input;
- 2) One DVI video signal input;
- 3) One HDMI video signal input;
- 4) Supports RCG file read-back function;
- 5) Supports RCG file broadcasting function;
- 6) Supports CON file broadcasting function;
- 7) With four network outputs, supports common video source, like 2560x1024, 1920x1200, 2048x1152, etc.;
- 8) Supports cascade function;
- 9) Supports brightness auto-adjustment (requires light sensor).

Appearance: _____

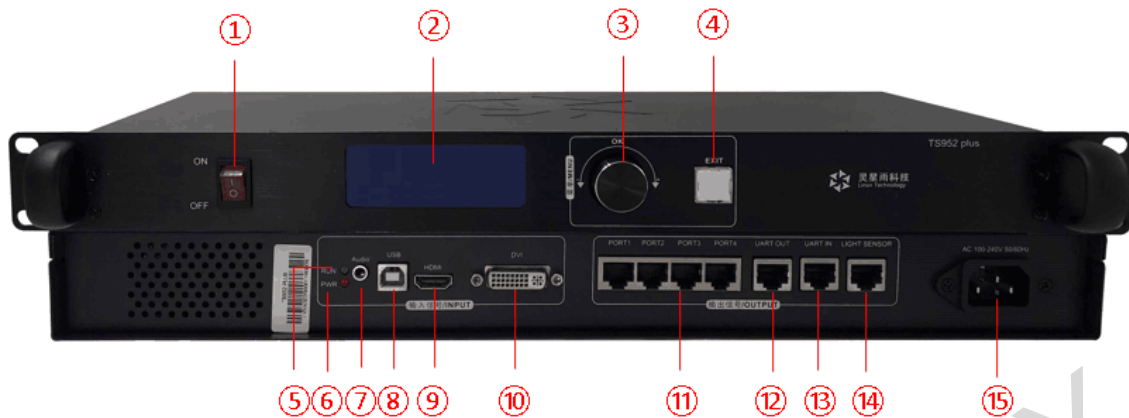

Interface introduction	
①	Power switch
②	LCD interactive panel
③	Control knob: rotate to navigate; push in to make selection
④	Exit
⑤	Signal indicator
⑥	Power indicator
⑦	3.5mm audio input
⑧	USB connector for setup
⑨	HDMI signal input
⑩	DVI signal input
⑪	4 gigabit network ports


Official website: www.linsn.com

Add: Floor 15&16, Jiajiahao Business Building, No. 10168, Shennan Blvd,
Nanshan District, Shenzhen

Tel: +86-0755-86183590/ 4008836968

⑫	UART-OUT: cascade output
⑬	UART-IN: cascade input
⑭	Light sensor connector for brightness auto-adjustment Power input: AC100~240V
⑮	Power input: AC100~240V

Dimensions:

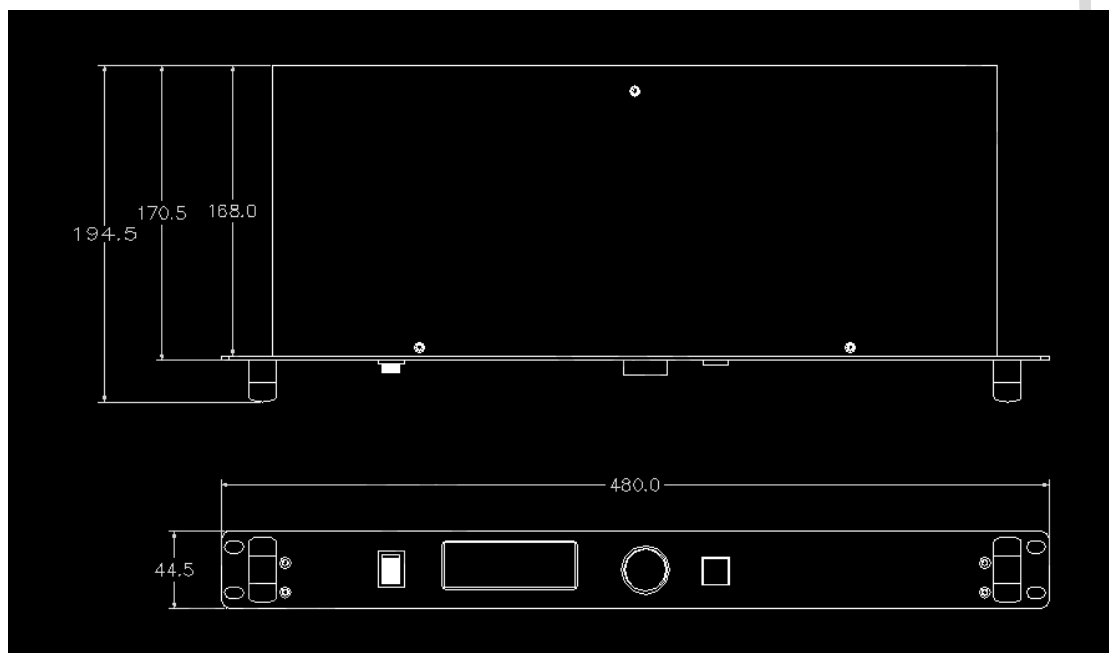

Working conditions:

Rated power consumption (W)	20
Working temperature (°C)	-20°C ~ 75°C
Working humidity (%)	0% ~ 95%
Weight (KG)	3

END

Official website: www.linsn.com

Add: Floor 15&16, Jiajiahao Business Building, No. 10168, Shennan Blvd,
Nanshan District, Shenzhen

Tel: +86-0755-86183590/ 4008836968