

Sending card

TS902

V1.1

Jan 2019

TS902 is a sending card with four network ports, and supports single, double and full color LED screen. It also supports 4K video source input and its maximum capability is 2.6 million pixels.

1. Features:

- 1) One Audio signal input;
- 2) One PCI-E 1X interface;
- 3) One DVI video signal input;
- 4) One HDMI video signal input;
- 5) Supports 4K video source input;
- 6) Supports RCG file read-back function;
- 7) Supports RCG file broadcasting function;
- 8) Supports CON file broadcasting function;
- 9) Supports 12bit/10bit/8bit video input;
- 10) Supports 16bit grey scale;


Official website: www.linsn.com

Add: Floor 15&16, Jiajiahao Business Building, No. 10168, Shennan Blvd,
Nanshan District, Shenzhen

Tel: +86-0755-86183590/ 4008836968

- 11) With four network output ports, supports common video source, like 2560x1024, 1920x1200, 2048x1152, etc;
- 12) Supported video format: RGB, YCrCb4:2:2, YCrCb4:4:4.

2. Appearance

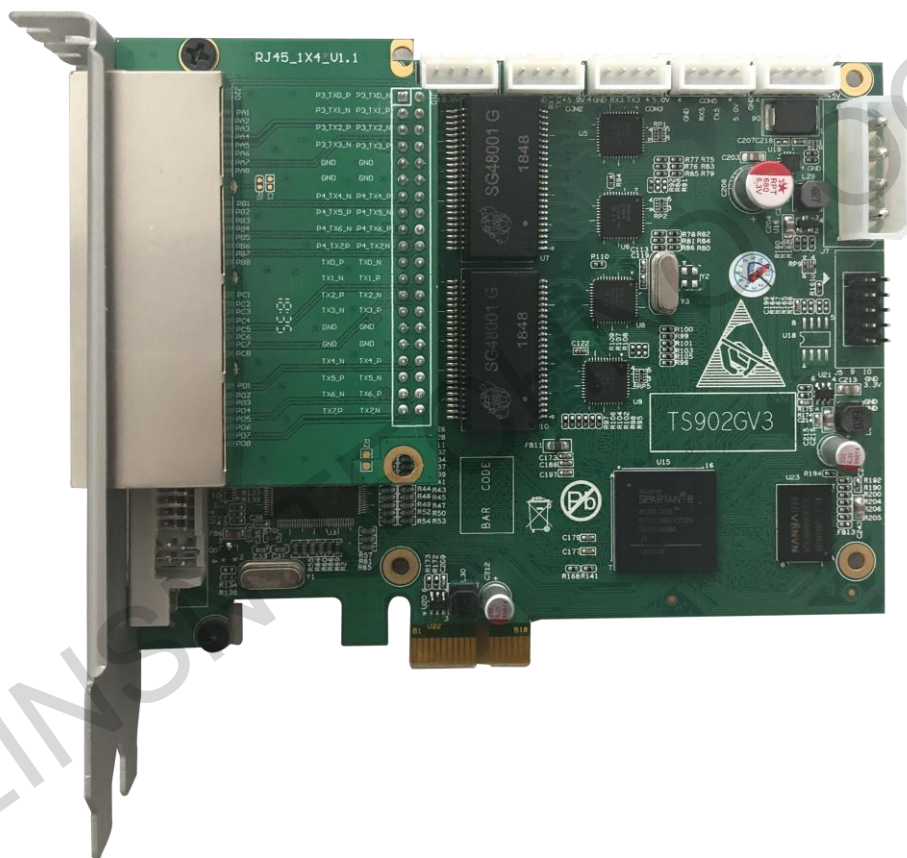



3. Working conditions

Rated voltage (V)	5	maximum	5.5	minimum	4.5
Rated current (A)	0.50	maximum	0.57	minimum	0.46
Rated power consumption(W)	2.5	maximum	3.1	minimum	2.1
Working temperature (°C)	-20°C ~ 70°C				
Working humidity (%)	0% ~ 95%				

END