


P1.667 240x120mm Indoor Flexible Soft LED Display

Module Specification


Model No.: **P1.667-ISF36S-SMD1010-144x72-E**


LED Lamp Specification





Color	Package	Intensity	Viewing Angle	Wavelength	Testing Conditions
Red	SMD1010	10-22mcd	110°	620-625nm	25°C,5mA
Green		30-80mcd	110°	515-535nm	25°C,3mA
Blue		4.5-9.9mcd	110°	460-475nm	25°C,2mA

Module Photo

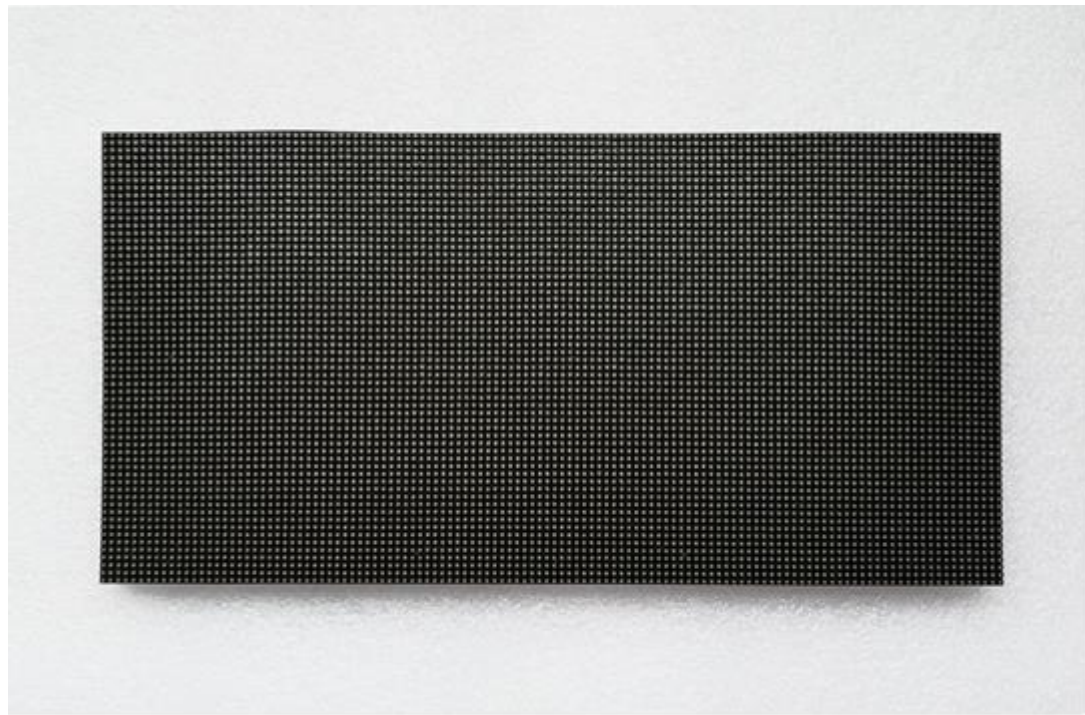

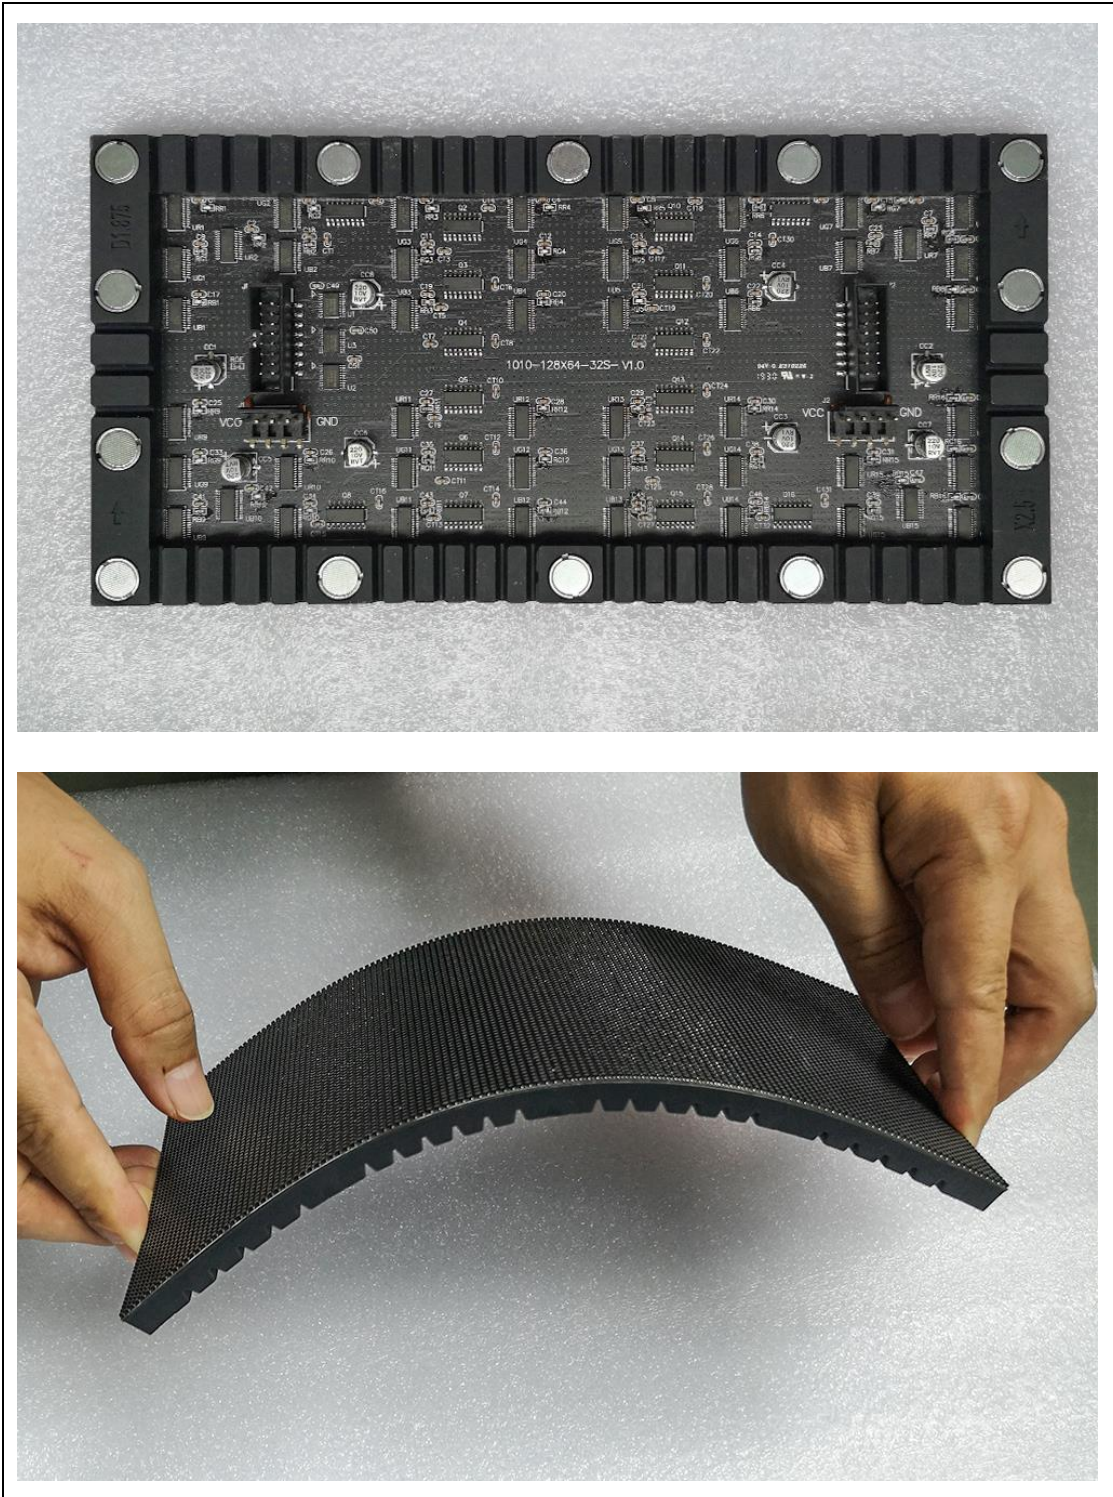

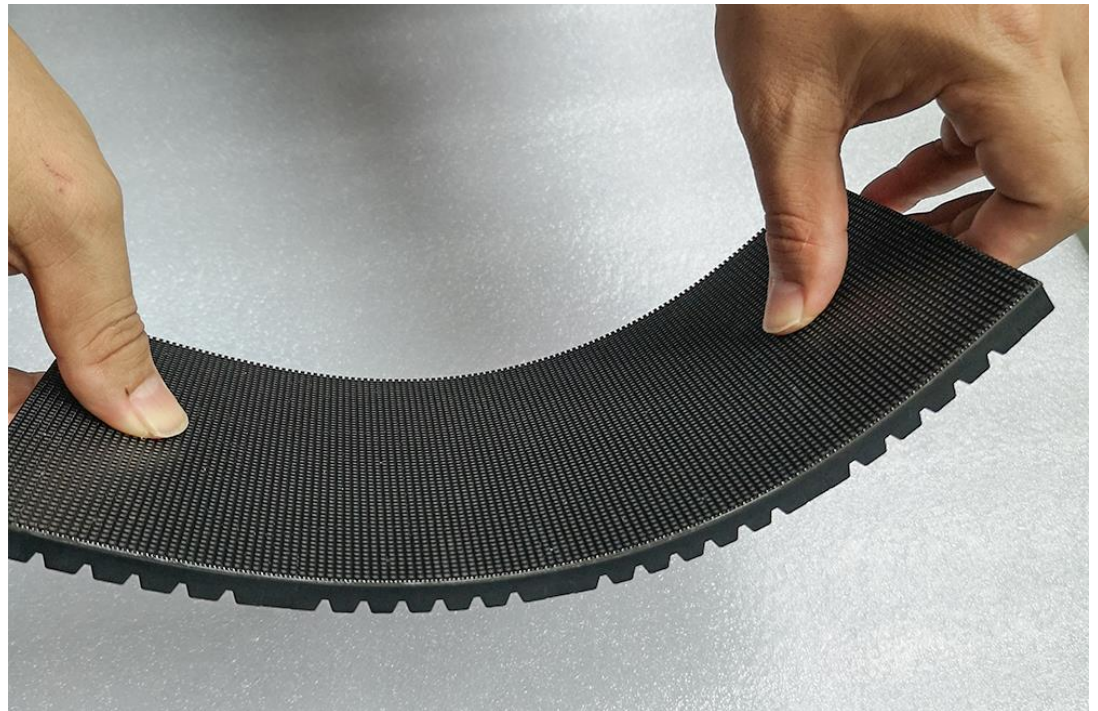

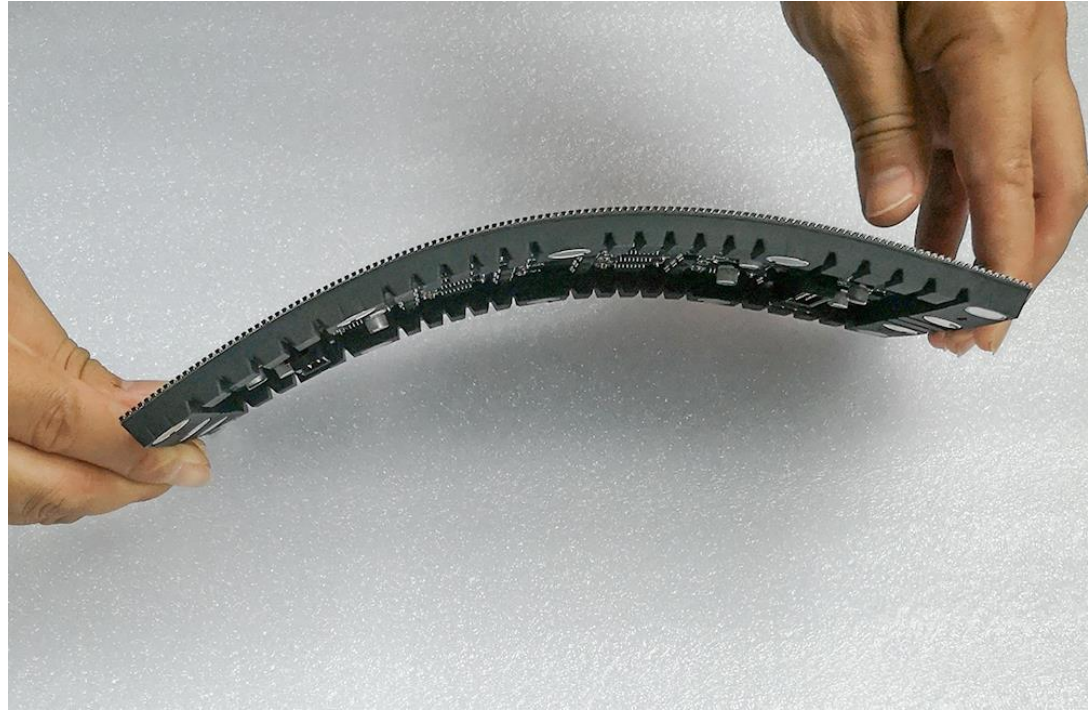

Module Parameter

Pixel Pitch	1.667mm
Pixel Configuration	SMD1010
Density	359,856 pixels/m ²
Module Resolution	144pixel(L) * 72pixel(H)
Module Dimension	240mm(L) * 120mm(H) * 8.5mm(D)
Driving Mode	Constant current, 1/36 duty

Electricity Parameter

Optical Ratings


Brightness	≥800 cd/m ²
Viewing Angle	140 °(Horizontal); 140 °(Vertical)
Best Viewing Distance	≥1.6m
Gray Grade	14 bits
Display Color	4.4 trillion colors
Brightness Adjustment	100 grades by software or automatically by sensor
Max. Power Consumption	15 W

Control System

Frame Frequency	≥60Hz
Refresh Frequency	≥3840Hz
Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI
Control Distance	100m(Ethernet cable); 20KM(optical fiber cable)
Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200
Color Temperature	5000—9300 adjustable

Brightness Correction	Pixel by pixel, module by module, cabinet by cabinet
Reliability	
Working Temperature	-20~+60 ℃
Storage Temperature	-30~+70 ℃
Working Humidity	10%~90% RH
Lifetime	100,000 hours
MTBF	5000 hours
Continuous Operating Time	≥72 hours
Protection Grade	IP31
Out-of-Control Pixel Rate	≤0.01%

Assembly diagram

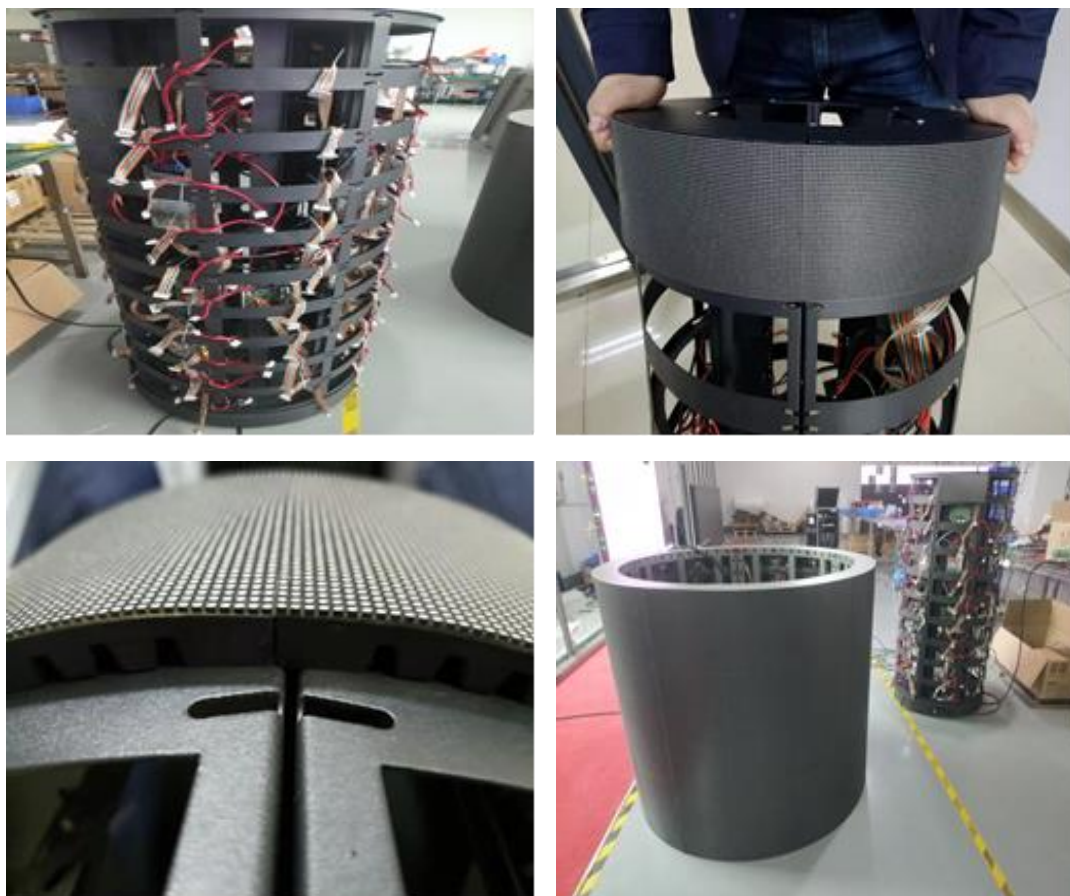

Application

