


## P2.5 Indoor 320\*160mm Soft Flexible LED Module

### Specification

Model No.: **P2.5-ISF32S-SMD1515-128x64**


#### LED Lamp Specification



Color	Package	Intensity	Viewing Angle	Wavelength	Testing Conditions
Red	SMD1515	45-65mcd	110°/110°	620-625nm	25°C, 10mA
Green		120-200mcd	110°/110°	516-530nm	25°C, 5mA
Blue		20-40mcd	110°/110°	465-475nm	25°C, 5mA

#### Module Photo



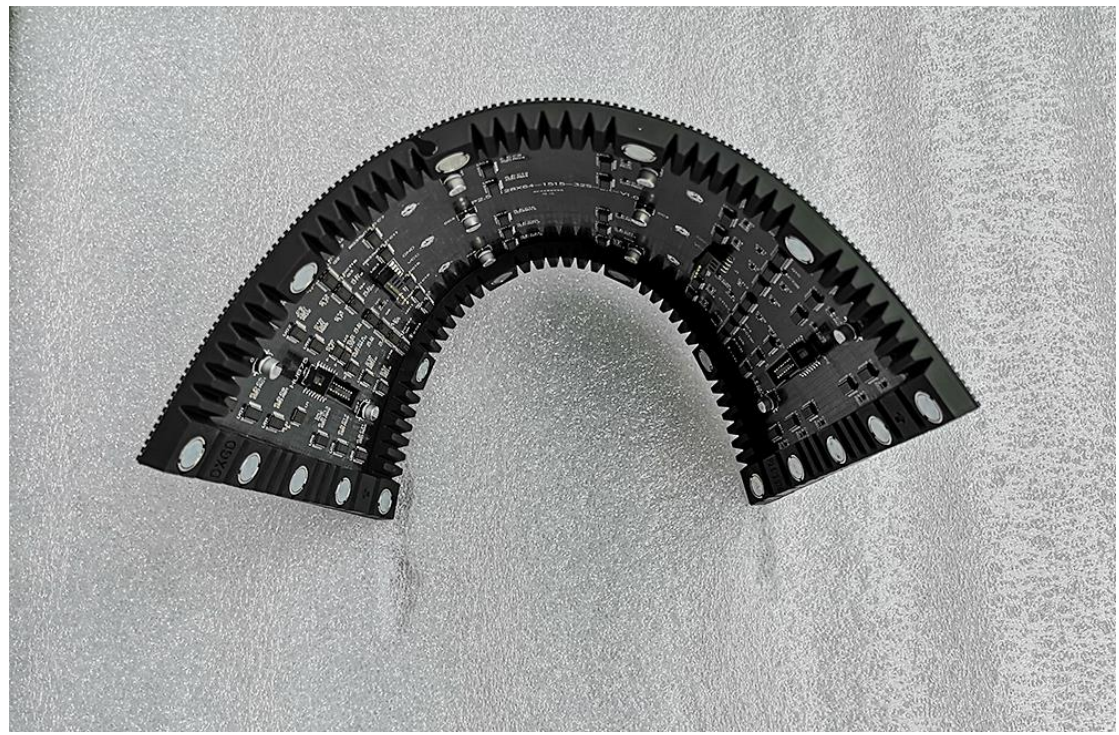

### Module Parameter


Pixel Pitch	2.5mm
Pixel Configuration	SMD1515
Density	160,000 pixels/m <sup>2</sup>
Module Resolution	128pixel(L) * 64pixel(H)
Module Dimension	320mm(L) * 160mm(H) * 8.5mm(D)
Driving Mode	Constant current, 1/32 duty


### Electricity Parameter



Optical Ratings	
Brightness	≥800 cd/m <sup>2</sup>
Viewing Angle	140 °(Horizontal); 140 °(Vertical)
Best Viewing Distance	≥2.5m
Gray Grade	14 bits
Display Color	4.4 trillion colors
Brightness Adjustment	100 grades by software or automatically by sensor
Max. Power Consumption	20W



Control System	
Frame Frequency	≥60Hz
Refresh Frequency	≥1,920Hz
Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI
Control Distance	100M (Ethernet cable); 20KM (Optical fiber cable)
Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200
Color Temperature	5000—9300 adjustable

Brightness Correction	Pixel by pixel, module by module, cabinet by cabinet
<b>Reliability</b>	
Working Temperature	-20~+60 ℃
Storage Temperature	-30~+70 ℃
Working Humidity	10%~90% RH
Lifetime	100,000 hours
MTBF	5000 hours
Continuous Operating Time	≥72 hours
Protection Grade	IP31
Out-of-Control Pixel Rate	≤0.01%


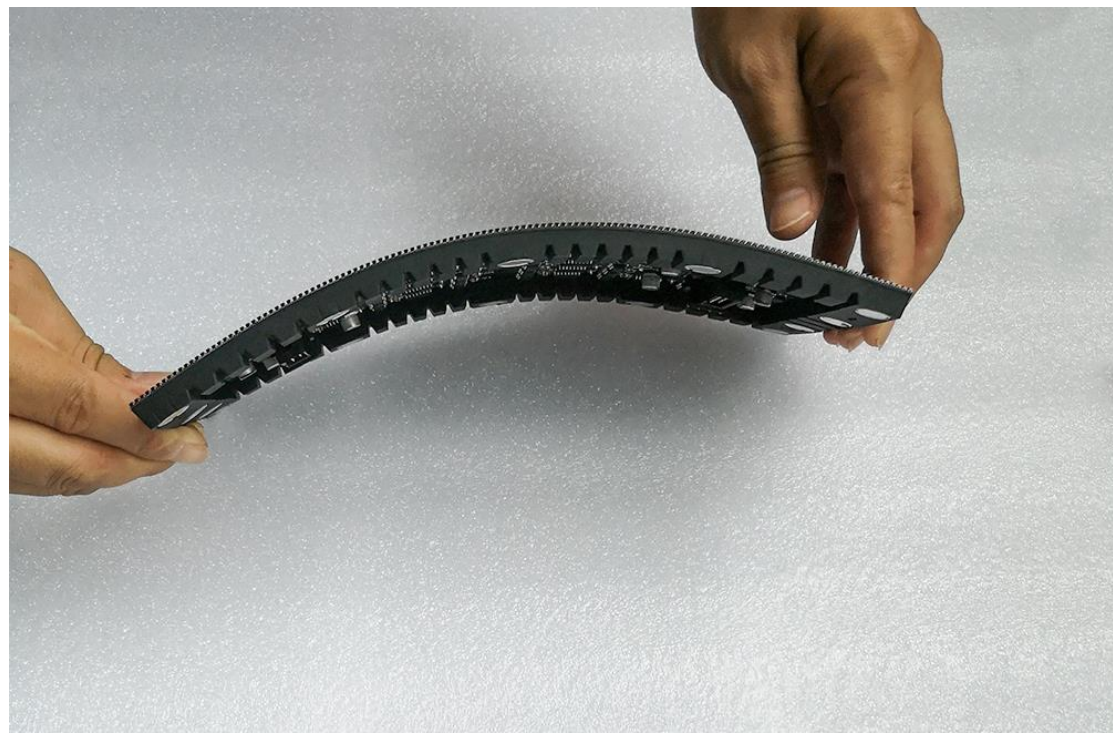
**Detail**

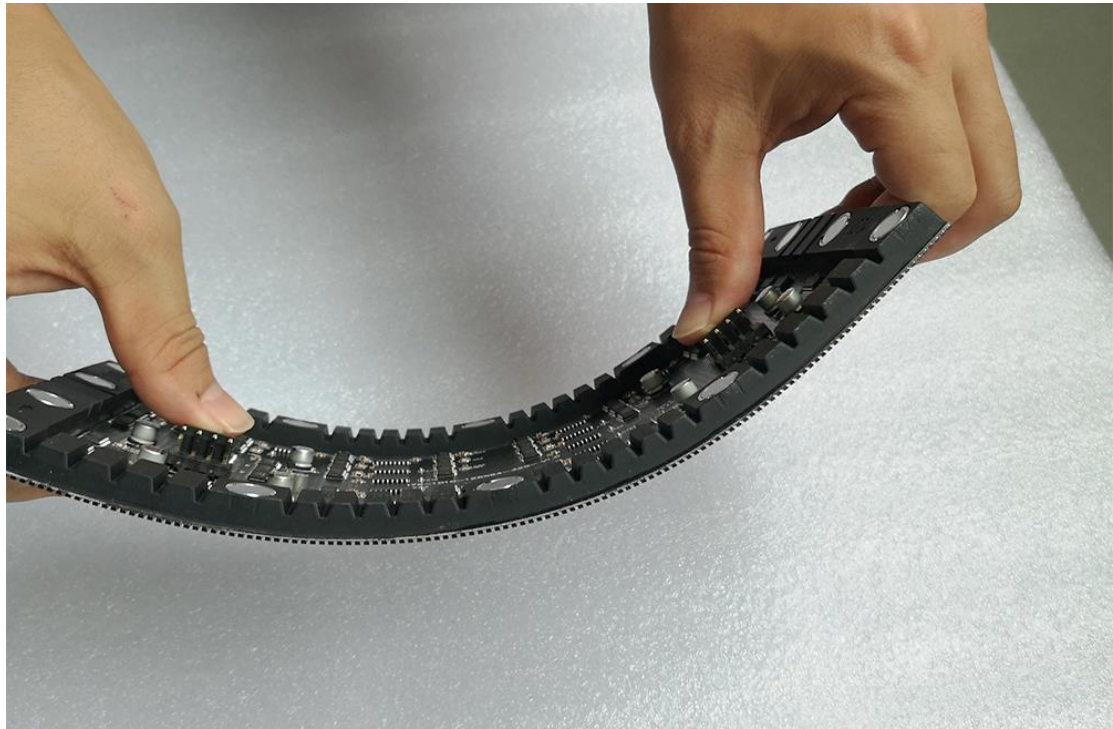

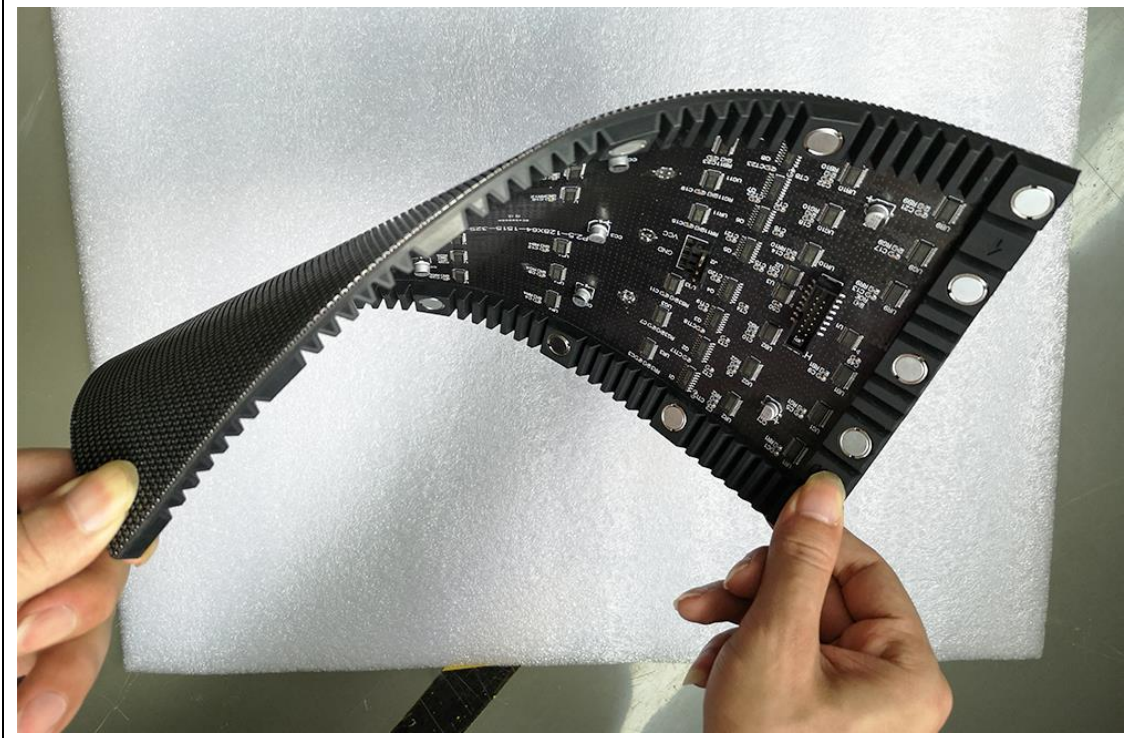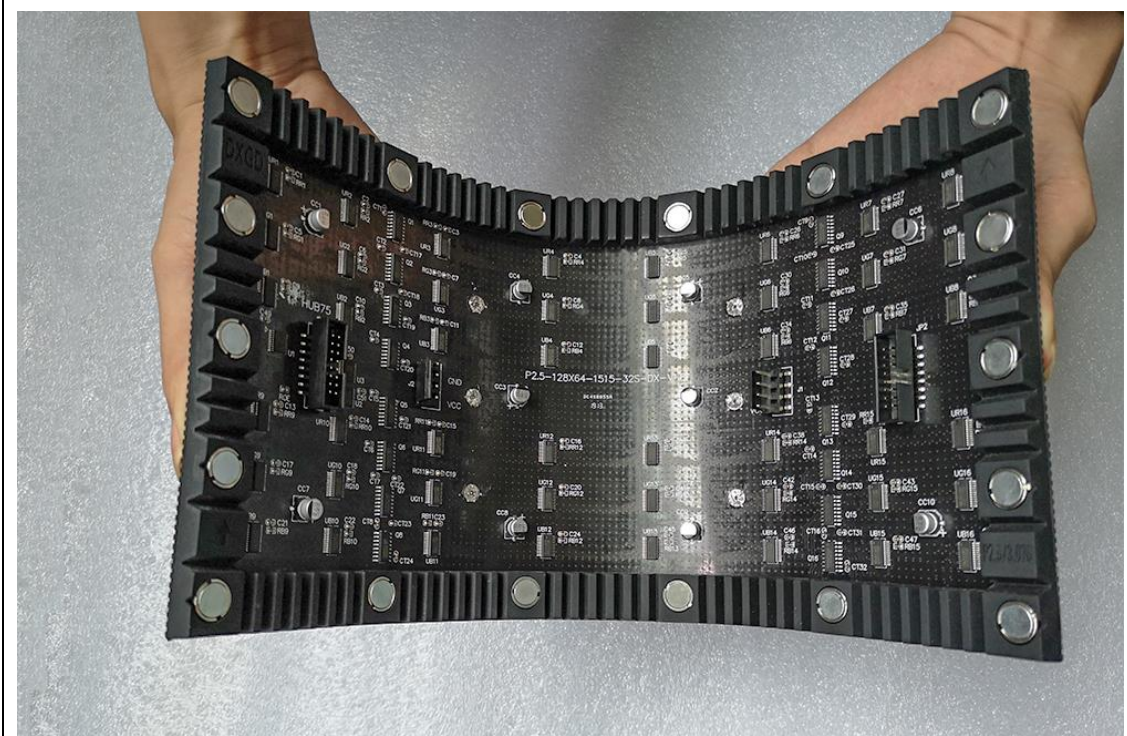

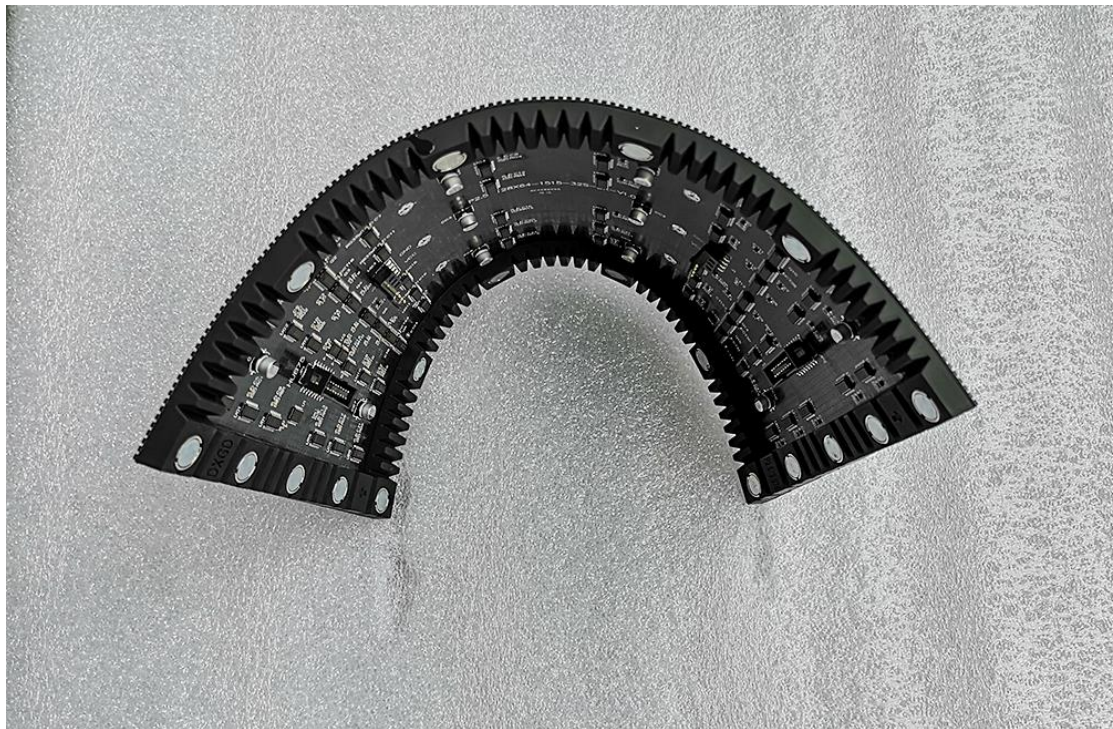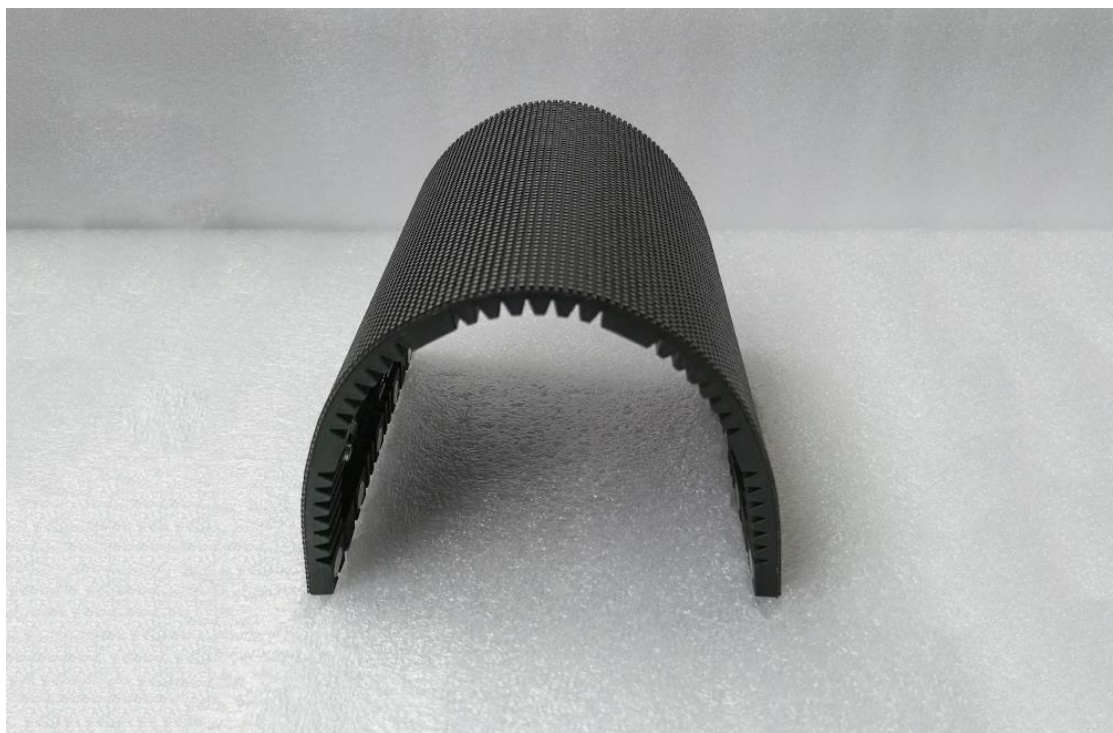

Assembly diagram

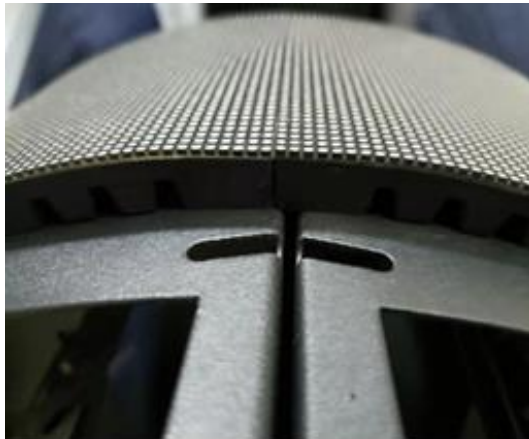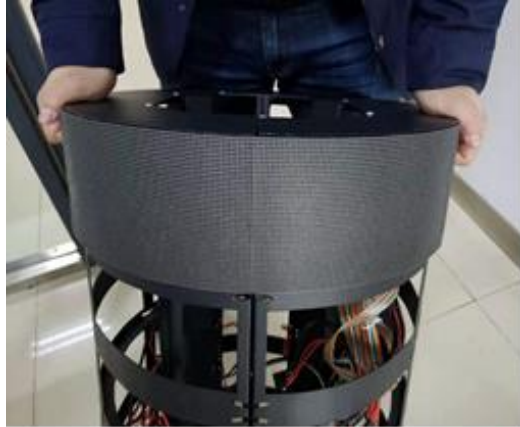

**Application**




Tel: +86-755-23190947

E-mail: [manager@eagerled.com](mailto:manager@eagerled.com)

Address: Building C, Zhongyu High-Tech Industrial Park, Heshuikou, Matian, Guangming, Shenzhen, China

Website: <https://www.eagerled.com>

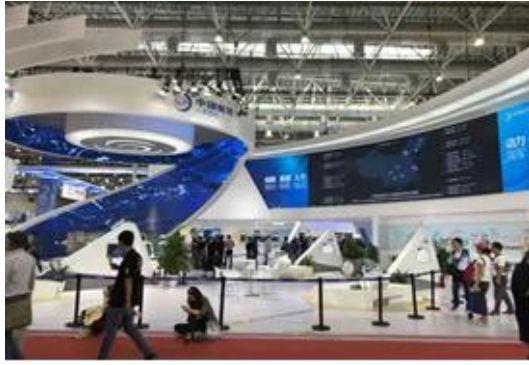

Package





