


## P3.076 Indoor SMD2121 320x160mm LED Module

### Specification

Model No.: **P3.076-I26S-SMD2121-104x52**

LED Lamp Specification					
					
Color	Package	Intensity	Viewing Angle	Wavelength	Testing Conditions
Red	SMD2121	80-104mcd	110°	618-623nm	25°C,15mA
Green		270-338mcd	110°	515-519nm	25°C,10mA
Blue		31-39mcd	110°	465-469nm	25°C,5mA
Module Photo					
					

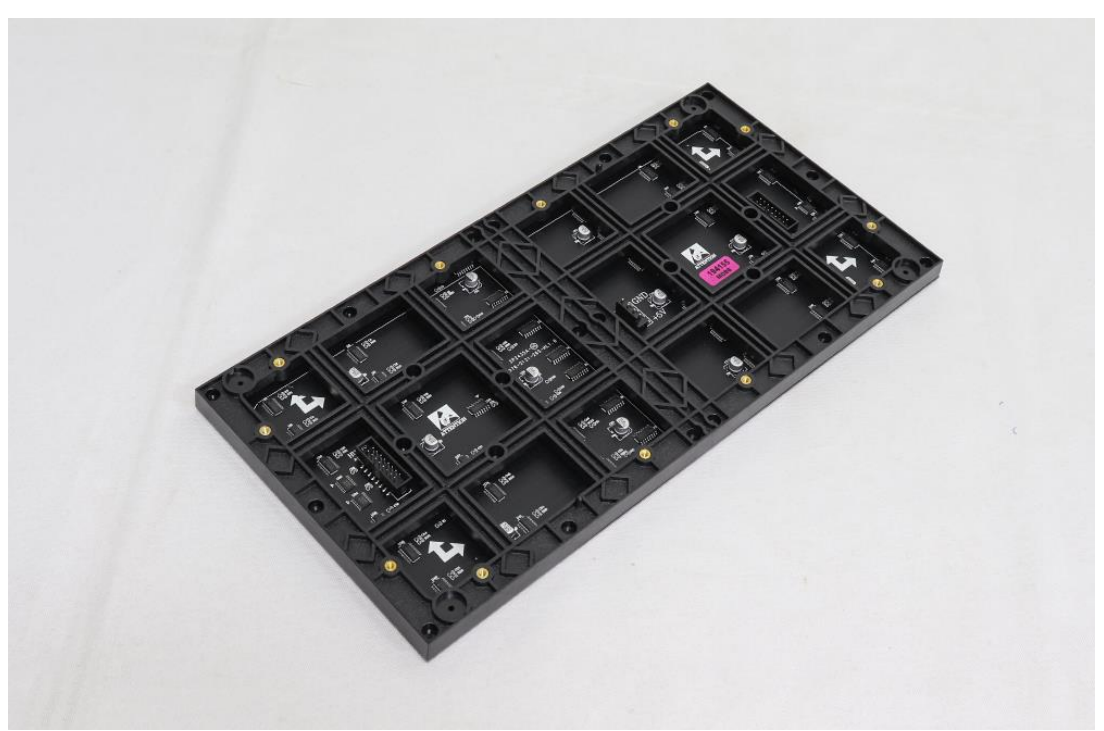

### Module Parameter

Pixel Pitch	3.076mm
Pixel Configuration	SMD2121
Density	105,688 pixels/m <sup>2</sup>
Module Resolution	104pixel(L) * 52pixel(H)
Module Dimension	320mm(L) * 160mm(H) * 18mm(D)
Driving Mode	Constant current, 1/26 duty

### Electricity Parameter

#### Optical Ratings

Brightness	≥1,000 cd/m <sup>2</sup>
Viewing Angle	140 °(Horizontal); 140 °(Vertical)
Best Viewing Distance	≥3m
Gray Grade	14 bits
Display Color	4.4 trillion colors
Brightness Adjustment	100 grades by software or automatically by sensor
Max. Power Consumption	21W

#### Control System

Frame Frequency	≥60Hz
Refresh Frequency	≥1920Hz
Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI
Control Distance	100m(Ethernet cable); 20KM(optical fiber cable)
Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200
Color Temperature	5000—9300 adjustable

Tel: +86-755-23190947

Website: <https://www.eagerled.com>

E-mail: [manager@eagerled.com](mailto:manager@eagerled.com)

Address: Building C, Zhongyu High-Tech Industrial Park, Heshuikou, Matian, Guangming, Shenzhen, China

Brightness Correction	Pixel by pixel, module by module, cabinet by cabinet
<b>Reliability</b>	
Working Temperature	-20~+60 ℃
Storage Temperature	-30~+70 ℃
Working Humidity	10%~90% RH
Lifetime	100,000 hours
MTBF	5000 hours
Continuous Operating Time	≥72 hours
Protection Grade	IP31
Out-of-Control Pixel Rate	≤0.01%

**Package**

