


# X1Gpro




## Key Features

- Picture-in-Picture (PIP)
- Transition effects
- RGBlink instant TAKE with pre-Sync
- Audio controls
- Support for RGBlink OpenAPI
- On board test patterns
- Support for multi-device cascade
- Support for additional input options
- EDID management on board

## Application

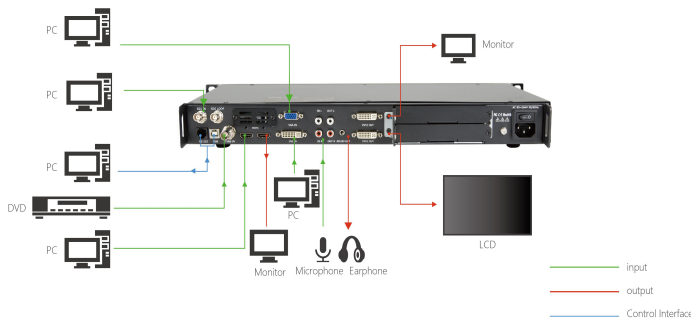

## Dimensions

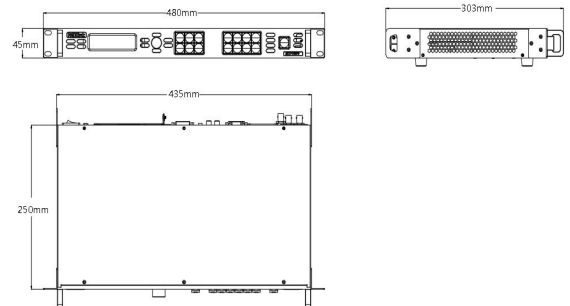

## Order Codes

Product Code	Item
820-1004-04-0	X1Gpro
190-0004-01-0	Single USB Input Module
190-0004-02-0	Single DVI Input Module
190-0004-04-0	Single 3G SDI Input/Loop Module
190-0004-05-0	Single HDBaseT Input Module
190-0001-02-1	Single VGA Input Module
190-0001-04-1	Single DVI Input Module

Product Code	Item
190-0001-06-1	Single HDMI Input/Loop Module
190-0001-07-1	Single 3G SDI Input/Loop Module
190-0001-09-1	Single CVBS Input/Backup Module
190-0004-08-0	Single SDI Input/Loop Module
190-0004-06-0	EXT Module
190-0001-32-0	EXT Module



## Specification

<b>Connectors</b>	Input	<i>Standard with</i>	HDMI In/Loop DVI VGA CVBS	2×HDMI-A 1×DVI-I 1×DB15 1×BNC
			<i>1 specific slot up to 1 SDI input</i>	
		<i>Select from</i>	SDI In/Loop	2×BNC(1 In 1 Loop)
			<i>1 slot up to 1 SDI input</i>	
		<i>Select from</i>	DVI Module HDMI Module HDMI Module 3G SDI Module USB Module HDBaseT Module	1×DVI-I (DVI,VGA, YPbPr, CVBS) 1×HDMI-A 2×HDMI-A (1 In 1 Loop) 2×BNC (1 In 1 Loop) 2×USB-A (1 In 1 Backup) 1×RJ45
	Audio		IN L/R OUT L/R Audio Out	2×RCA 2×RCA 1×3.5mm Stereo Jack
Output	<i>Standard with</i>	DVI	2×DVI-I	
Communication		Serial RS232 In Serial USB In	1×RJ11 1×USB-B	
Power			1×IEC	
<b>Performance</b>	Input Resolutions	DVI   HDMI SMPTE VESA  VGA VESA  SDI SMPTE	480i   576i   720p@50/59.94/60   1080i@50/59.94/60   1080p@50/59.94/60 800×600@60   1024×768@60   1280×768@60   1280×1024@60   1366×768@60   1600×1200@60   1920×1080@60  800×600@60   1024×768@60   1280×1024@60   1366×768@60   1440×900@60   1600×1200@60   1920×1080@60  480i   576i   720p@25/30/50/60Hz   1080i@50/59.94/60Hz   1080p@23.98/24/25/29.97/30/50/59.94/60Hz	
	Output Resolutions	<i>Select from below or configure customized</i> DVI SMPTE VESA	720p@30/50/60   1080p@30/50/60 1024×768@60   1280×720@60   1280×800@60   1280×1024@60   1360×768@60   1366×768@60   1440×900@60   1400×1050@60   1600×1200@60   1680×1050@60   1920×1080@60   1920×1200@60   2048×1152@60   2560×816@60	
	Supported Standard	SDI VGA HDMI	SMPTE 425M (Level A & B)   SMPTE 424M   SMPTE 292M   SMPTE 259M-C   DVB-ASI UXGA 1.3	
	Power	Input Voltage Max Power	AC 100V-240V, 50/60Hz 25W	
<b>Environment</b>	Temperature	0°C ~ 55°C		
	Humidity	20%~90%		
<b>Physical</b>	Weight	Net (Device) Packaged	3.1kg 5.25kg	
	Dimension	Net (Device) Packaged	480mm×303mm×45mm 540mm×360mm×135mm	

