

80cm 2 in 1 Induction Cooktop with Integrated Ventilation System



2 in 1 Cooktop & Air Extraction System

• Features its own powerful integrated air extraction system of up to 700m3/h enhanced by a 3-speed fan mode, which means optimal space saving, sleek design and full freedom while cooking

Booster Function

• 4 independently powerful cooking zones with a boost function: extra power for faster heating

9 Power Levels

· 9 adjustable power levels for faster heating so that you can masterchef at ease

Pre-Set Temperature & Pre-Set Timer

· Heating automatically stops when the cooking time is up

Intuitive Touch Control

• Easy to understand and easy to operate, so you can easily adjust the temperature and access all of the important functions at your fingertips

Space Saving & Easy Installation

• Installation requires minimal ducting, allowing you to utilize the cabinets directly underneath the cooktop







80cm 2 in 1 Induction Cooktop with Integrated Ventilation System

Technical Features

Materials / Color: Installation: Cooktop ignition: Voltage / Frequency: Cooktop Total Power: Current:

Control Features | Ventilation System

Power Level: Max. Air Extraction Power: Motor Power: Control Display: Auto Timer: Sound Power Level: Indicators / Display:

Filter Features | Ventilation System

Aluminum / Stainless Steel: Activated Charcoal Filter (CF152): Integrated Grease Drip Tray:

Control Features | Induction Cooktop

Control display: Position of controls: Separate controls for each zone: Pre-set temperature (for each zone): Pre-set timer (for each zone): Time buzzer: On/Off indicator light: Indicators / Display:

Cooking Zones

Control Levels: Booster Function (for each zone): Front Left Zone: Rear Left Zone Rear Right Zone: Front Right Zone: Induction 220-240V, 50/60Hz 7335W 31.89A 3 Speeds

Black glass

Ductless

o opecus
700m3/h
135W
Touch
Yes
<73db
Fault indicator

4 Layer Yes Yes

Yes Yes Yes Yes Yes Yes Yes

Touch Front Yes 99min, countdown Yes Yes Fault indicator, residual heat

9 per zone Yes Ø 160mm • 1500W Booster Ø 180mm • 2100W Booster Ø 180mm • 2100W Booster Ø 160mm • 1500W Booster

Cookware Compatibility

Induction cooktops are only compatible with cookware made from magnetic material

Safety Features

Residual heat indicator:
Pause function:
Child safety lock:
Overflow safety switch-off:
Overheat safety system:
Automatic switch off:
Pan size sensors:

Dimensions & Weight

 Packed dimensions:
 87 (L) x 57.5 (W) x 27.5 (H) mm

 Packed weight:
 22g

 Unpacked dimensions:
 80.5 (L) x 52 (W) x 20.5 (H) mm

 Unpacked weight:
 18kg

 Cutout dimensions:
 220 (L) x 90 (W) mm

 Cabinet hole dimensions:
 765 (L) x 495 (W) mm


Warranty

Two (2) year parts and labor | *Extend your warranty by registering your product linarie.com.au



80cm 2 in 1 Induction Cooktop with Integrated Ventilation System

Installation Drawings

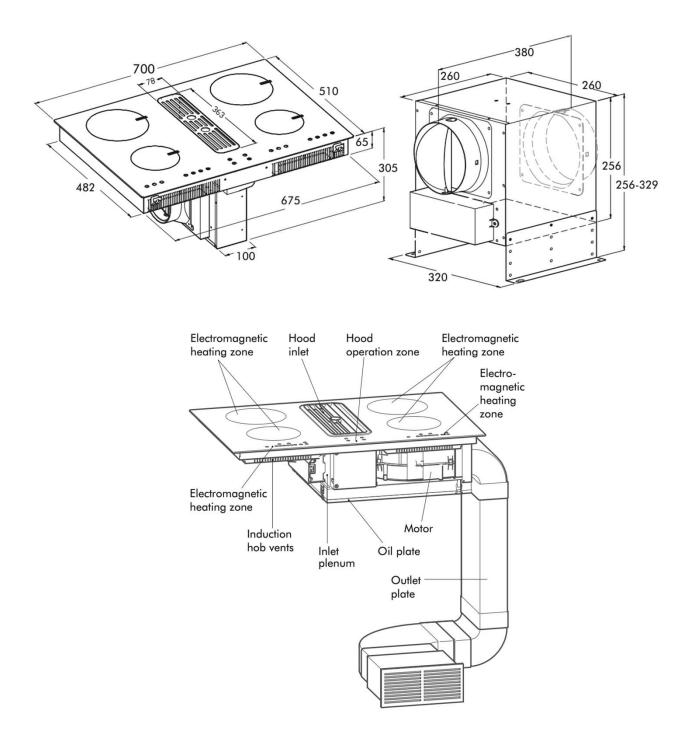

Please refer to the user manual for detailed installation instructions.



80cm 2 in 1 Induction Cooktop with Integrated Ventilation System

Because each kitchen has different configuration, ducting accessories for this product are NOT included and should be purchased separately.

We recommend you our partner website: www.expella.com.au/product/low-profile-pvc-duct/

expella				Q <u>2</u>	、Login 岸 (0) Contact Us
Ventilation benefits	Odourless toilets	Shop products	Showcase	News and advice	About us	Customer care
Home / Ducting / Low Profile /	220mm x 90mm Low profile PV	C duct				
				mm x 90m Cduct	m Low	profile
			\$6.98	8 – \$53.89		
			220mm >	< 90mm Low profile PVC d	luct and associa	ited fittings
			Item			
			_	1 +		
			Ac	ld to cart `ਦ		
		Select t	the item	ns you need	and c	ustomize your


kit to fit your kitchen configuration




80cm 2 in 1 Induction Cooktop with Integrated Ventilation System

Because each kitchen has different configuration, ducting accessories for this product are NOT included and should be purchased separately.

Installation Drawings: Option 1





	Duct Connector
	Low Profile Flat Channel Ducts 1M
	90 Vertical bend
	Low Profile Flat Channel Ducts 1M
	Supporter Clip - Plastic
\bigcirc	Rangehood Adapter 150 Ømm
Ó	Flexible Duct Connector 500 mm
	0.00

Installation Drawings: Option 2