


Installation Guide

Picture 1



Picture 2

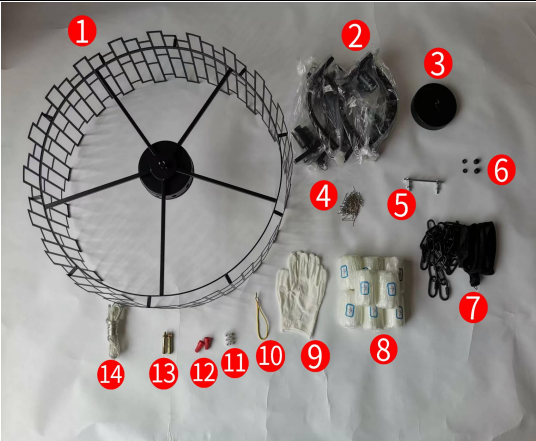


Parts List: ①*1; ②*10; ③*1; ④*120; ⑤*1 (Hanging Board*1 + Hexagonal Nut*4 + Screw*2); ⑥*1 (Hexagonal Nut*2 + Screw Cap*2); ⑦*1 (Hanging Chain + Velvet Cover); ⑧*120; ⑨*2; ⑩*1; ⑪*1; ⑫*2; ⑬ (Expansion Screw)*2; ⑭*1

Step 1: Mark ⑤ on the ceiling.

Picture 3




Picture 4

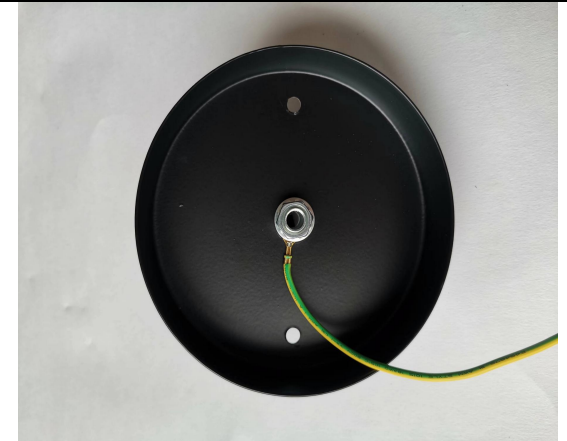


Step 2: Measure the length of ⑬, then drill holes in the ceiling for ⑬ with an electric drill. First, remove the two nuts on the tail of ⑬, and then put ⑬ into the two holes in the ceiling. Next, align ⑬ with the two holes in the middle of ⑤ and pass through them. Finally, fasten ⑬ with two nuts.

Step 3: Wear the ⑨ and fix the ground wire in the hexagonal nut of ③ with a wrench.

Picture 5

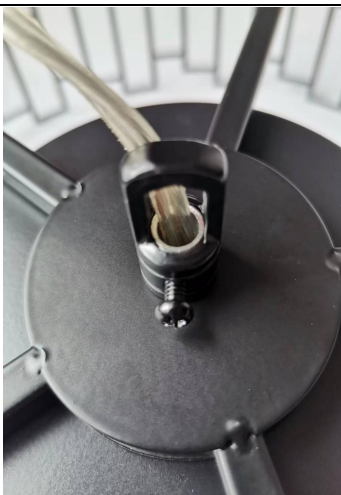

Picture 6

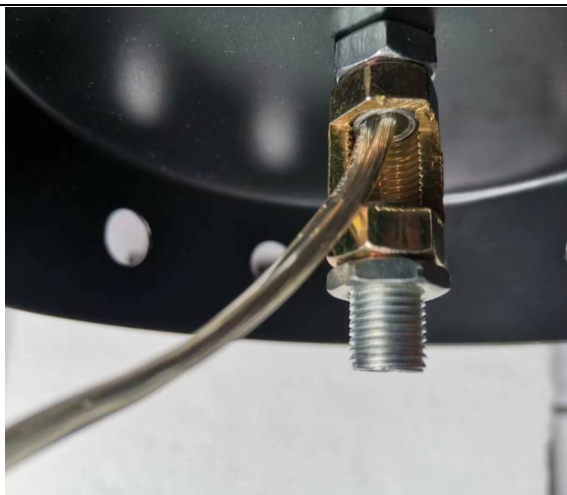


Step 4: Insert ⑭ into ①.

Picture 7



Picture 8

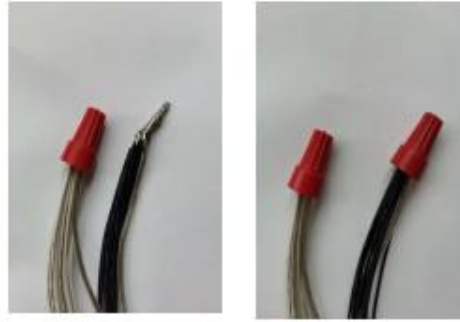


Step 5: Use a wrench to fix all the hexagonal nuts with gaskets on the inside of the ①.

Step 6: According to the color classification, connect the 10 lamp arm wires in ① with ⑭ respectively, and then fix them with ⑫. Make sure that the wire and the copper wire in accordance with the color classification are all twisted together.

Picture 9




Picture 10

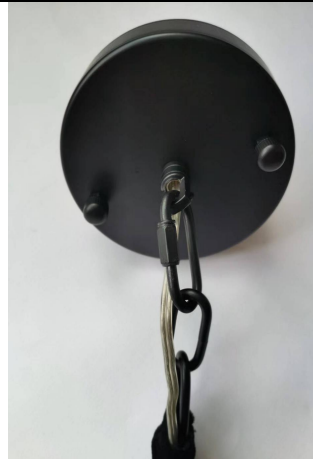

Step 7: Fix ⑦ to the lifting ring of ①, and then fix the other end of ⑦ to the lifting ring of ③ on the ceiling. Adjust the height of ⑦ according to the height required by the house, and then tighten the safety buckle at both ends of the chain.

Picture 11

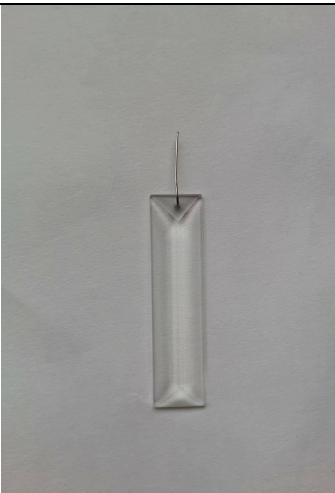


Picture 12



Step 8: Connect ③ with ④.

Step 9: Fix 120 connected ③ and ④ on ①.

Picture 13

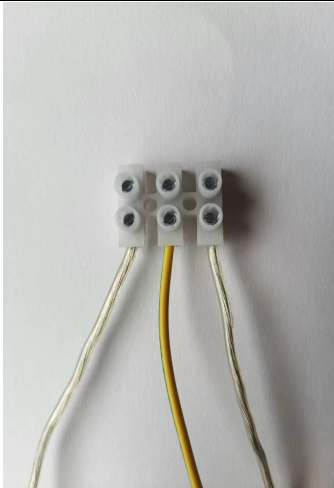

Step 10: Fix ⑭, ⑩, and ⑪ with a screwdriver, connect them to the ceiling wire, then tighten the safety teeth of the lifting ring, adjust the lamp, and finally try on the light.

Picture 14



Step 11: Fix ③ and ⑥ (Hexagonal Nut*2 + Screw Cap*2) on the ceiling.

Picture 15



page 6 of 7

Completion.