



Redtiger

T700 USER MANUAL

E-mail: help@redtigercam.com

Website: <http://www.redtigercam.com/>

Phone: +188 8966 8028

 Instagram



WARNING: Be careful when using your camera and its accessories. Always be cautious of your surroundings to avoid injuring yourself and others.

Make sure to follow all local laws including all privacy laws which may restrict recording in certain areas.

Contents

| | |
|------------------------|----|
| Product Information | 1 |
| Meet your T700 | 2 |
| T700 Power Tools | 3 |
| Setting Up Your Camera | 4 |
| Installation | 6 |
| Customizing Your T700 | 11 |
| GPS Player (PC) | 17 |
| Customer Service | 20 |

MAINTEN YOUR CAMEAR

Do not directly plug and unplug the cable or SD card, please perform related operations after camera off.

We do not encourage you connection your camera with other hardwire kit, but if you insist to do this, please have a look of those lower than 6V and higher than 2.5A.

Do not expose to the sun for a long time is the best, camera will heat on during its working, any damaged by high temperature will be added to 1 year free replacement warranty.


Product Information

| | |
|----------------------|--|
| Item Name | 11" Stream Media Dash Camera |
| Model | REDTIGER T700 |
| Screen Size | 11" IPS Touch Screen |
| Power Interface | Type C 5V/3A |
| Battery | Super capacitor |
| Display Resolution | 1920x1080P |
| Recording Resolution | Front Camera: 3840*2160P, 2560*1440P, 1920*1080P Rear Camera: 1920*1080P |
| Loop recording | 1/2/3 mins |
| Recording method | Normal recording/ Emergency recording |
| Screen View | Front + Rearview/ Front view/ Rearview |
| Video Format | Video: TS; Still image: JPG |
| Memory Card | Micro SD card 32G ~ 128G U3 |

Product Information

| | |
|-----------------------|--------------------------------------|
| GPS | Yes |
| G-sensor | 3 Axis G-sensor |
| Audio | Support sound recording and playback |
| Storage Temperature | -22°F~ 176°F |
| Operating Temperature | -4°F ~ 158°F |


Meeting Your T700

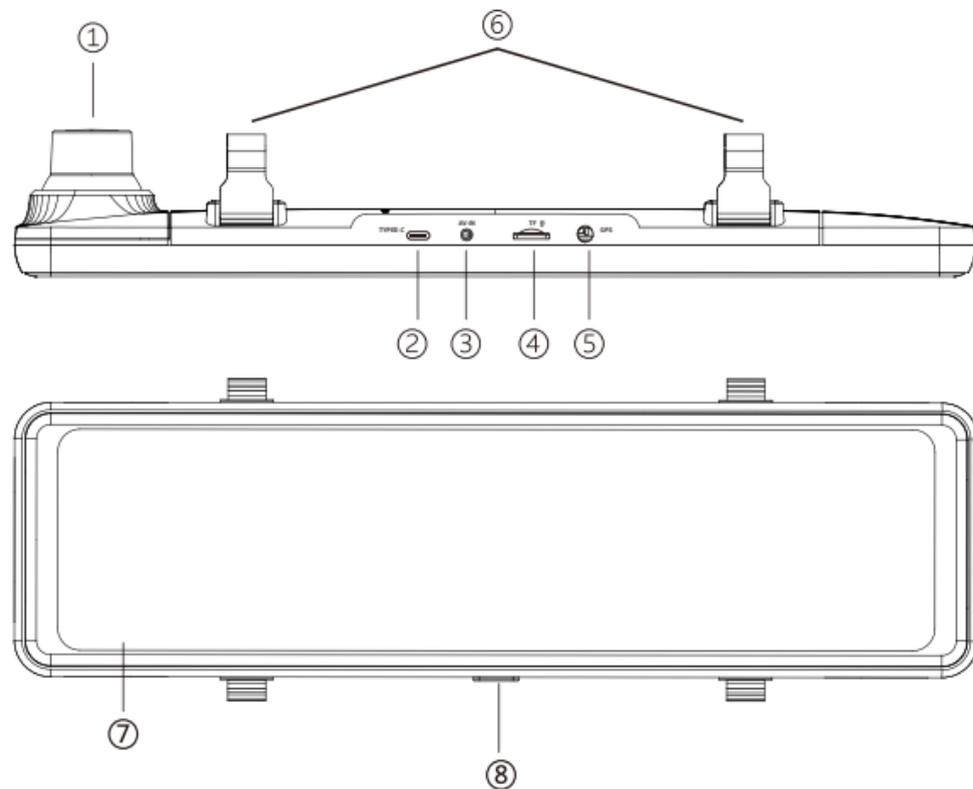

Meeting Your T700

| | | |
|---|--------------------|--|
| 1 | Front Camera | Record the front view of the vehicle |
| 2 | Power Supply Port | Connect the car charger |
| 3 | Rear Camera Port | Connect the rear view camera |
| 4 | Micro SD Card Slot | Insert a Micro SD card (maximum support 128G) |
| 5 | GPS Port | Connect the GPS receiver |
| 6 | Fasteners | Please use the included silicone straps |
| 7 | Screen | 11 inch IPS touch screen |
| 8 | Power Button | Short press to turn off the screen, long press to turn off the power |

T700 Power Tools

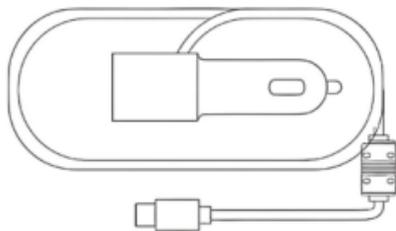


1. Cig Charger
(No Battery Protection)
SEE PAGE 5



2. Hardware Kit
(Needed for Parking Mode)
(Not Included, Purchase Separately)

Setting Up Your Camera

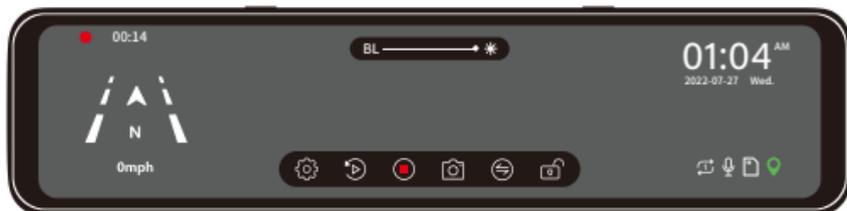

Speed & Driving Direction: Once GPS is connected, the information will show



Screen Brightness Adjustment: Slide the bar left and right to adjust the screen brightness



Settings: Touch to enter the menu setting



File Playback: Playback the video & Photo



Start/ Stop Recording



Front / Rear View Switch: Switch between front view & rear view



Snapshot: Take a Snapshot



Emergency Lock: Lock videos as event files so it won't be overwritten by loop recording

01:04^{AM}

2022-07-27 Wed.

Date & Time



Recording Status: Yellow flashing means Lock Recording



Show SD card status



Audio Record is on



Loop Time: Adjust the loop recording duration (1Min/2Min/3Min)

Setting Up Your Camera



While recording, swiping the screen up and down adjusts the angle of view.



While recording, swipe the screen left or right to switch between front view, rear view, or split-screen view.



Touch the touchscreen to display the brightness scrollbar at the upper center, then slide right or left to adjust the brightness.

Setting Up Your Camera

SD CARD

With your camera off, insert the SD card into the card slot with the label facing the back of your camera. You can eject the card by pressing it into the slot with your fingernail.

WIRING SET UP

Connect your camera to a Cig charger using the included cig charge cable.

You'll need a micro SD card (sold separately) to save your videos and photos. Use a **U3 Class 10 SD™ Card** dedicated or your camera may malfunction.

SD cards can degrade over time and affect your camera's ability to save your media. Try swapping out an older card for a new one if you're having any problems.


Installation



Step 2: Pull out the front lens of the T700 dash cam to match the rearview mirror of the vehicle.



Step 3: Extend the straps around the back of the rear-view mirror and attach them to the bottom retaining hooks.

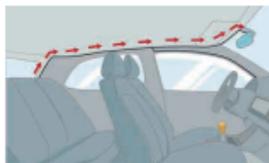

Route your rear camera's power cable to the front of the car. If you'd like, use a trim removal tool to pop out the headlining panel directly above your windshield. Then, run your cable through the exposed chamber.

Installation

We recommend install the rear camera above the license plate.

Fix camera with screws

Find a best location, use screws to fix the rear camera near by the car license plate lamp.



Remove the Panel

Remove the inner panel of the trunk to expose the rear wiring compartment of the car. Open the trunk and look for a sturdy inner panel covering the other side of the license plate installation area. Then, insert a decorative removal tool or another thin device behind the panel and pry it apart.



Snake the cable

Use a trim removal tool to pop out tailgate trim, then run the cable from outside of the car into the trunk of your car.



Installation

Connect the rear camera power cable to the extension cable. After snaking your rear camera's extension cable, connect the power cable to your rear camera's extension cord.



※If you need to install a trigger cable to activate the reversing guidelines, please find the positive cable of the reversing lamp, or ask a professional for help.

PLACEMENT OF REAR LENS INSIDE CAR

We suggest to install outside car, not inside



Step 1: Confirm the accessories

1 pc mount bracket (2 pcs black iron sheets)

4 pcs screws (2 pcs small screws, 2 pcs large screws)

Installation



Step 2: Place a iron sheet over the rear camera, aim it at the hole, and screw it on.



Step 3: Join the two iron sheets together and turn on the screws.



Step 4: Stick the bracke to the rear windshield with 3M glue.

PLACEMENT OF REAR LENS OUTSIDE CAR

We suggest to install outside car, not inside



Step 1: Tear off the release paper of 3M sticker on Rear lens.

Step 2: Paste the rear lens directly above the license plate.

Installation



How to install the GPS

GPS front and back

Installation location



Position 1: Considering that the front windshield of a motor vehicle has a large enough view of the sky, it is usually recommended that the GPS module be placed in the central console. At the corners of the central console and the edge of the windshield, after adopting hidden wiring, they are fixed with double-sided tape.

Installation

Considering the use effect and installation convenience, we usually recommend customers to install it at position 1. Of course, you can also try to install it in other locations for testing, and choose the location you think is most suitable.



1) Install the GPS Antenna onto the camera, the GPS Antenna will start to search for a GPS signal.



2) Once the GPS is installed, the GPS icon on the home screen will show. After the GPS signal has been received, it will show direction and speed.
(Prerequisite: "GPS Disp" in the settings is turned on)

Installation

Q: Why is my GPS not working? /How to use GPS ?

A: If you cannot receive the signal after inserting the GPS, please follow the steps below.

- 1 The vehicle must be within a large area.
- 2 Insert the GPS plug again.
- 3 Place the GPS plug upward.
- 4 Restart
- 5 It will be recognized after about 40 seconds.

If still cannot receive the signal, it may be a GPS problem. Please CONTACT US and we will help you solve this problem.

Installation

PREPARE YOUR HARDWARE KIT

Since we considered some customers have no need of Parking Mode, there's no hardwire kit included in your packages. **You could refer this line of words to contact us to get a free hardwire kit.**

GETTING TO KNOW YOUR HARDWARE KIT

Features:

- > Low Voltage Protection
- > Multi Input Power
- > Universal Compatibility
- > Length: 11.5ft




WARNING: Wrong connection may disable Voltage Protection and damage your car.

Installation

INSTALL YOUR HARDWARE KIT

Red wire >> ACC >>> power off along the car
Yellow wire >> B+ >>> never power off
Black wire >> Ground e.g. screw

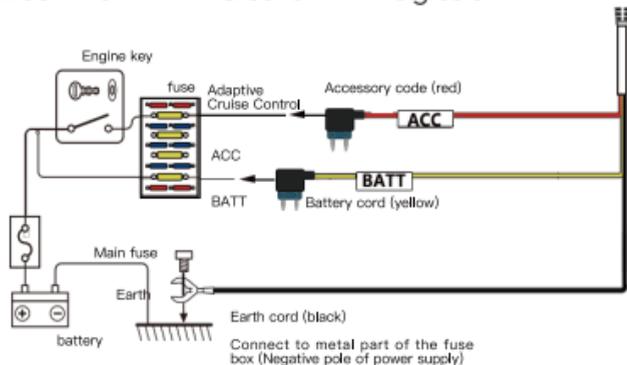

POP-UP: You could usually find your fuse box under the trunk or steering device. You could cut the head of wires and connect it to your fuse directly if your fuses is small.

Customizing Your T700

Power ON/OFF


- If you turn on the engine (ACC on) while the cigar power adapter is connected, the power will be turned on automatically and the opening screen will be displayed.
- Press and hold the power button to turn off the power during startup, and then briefly press the power button again to turn on the power of the unit and display the opening screen.
- Briefly press the power button to turn off the screen.

Menu Settings




After powering ON the camera, press the  button to enter the setup process.

Customizing Your T700

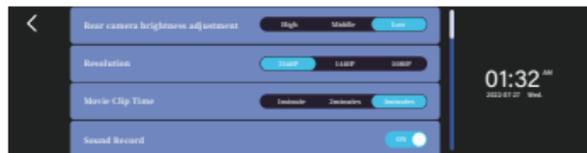


| Function | Function Description | Function Options |
|-----------------------------------|--|---|
| Rear camera brightness adjustment | Adjust the brightness of the rear camera | High/Middle/Low |
| Resolution | Adjust the video recording resolution. | 2160P+1080P 1440P+1080P 1080P+1080P |
| Movie Clip Time | Adjust the loop recording duration. | 1minute/ 2minutes/ 3minutes |
| Sound Record | Turn On/Off audio recording. | On/Off |

Customizing Your T700

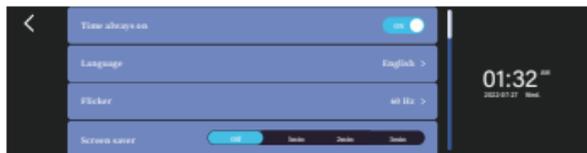


| Function | Function Description | Function Options |
|----------------|---|---|
| Time always on | When this setting is turned off, the time is not displayed when in the recording interface. | On/ Off |
| Language | Set the common language, the default is English. | English/Deutsch/ Français/Italiano/Português/ 简体中文/繁體中文/日本語/ 한국어/LavieRu |
| Flicker | / | 50Hz 60Hz |
| Screen saver | Set the status of the screen display when recording. | Off: The screen is always on. 1min/2min/3min: Automatically close the screen. |

Customizing Your T700

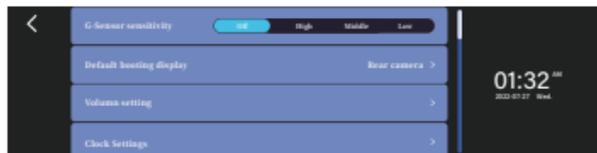


| Function | Function Description | Function Options |
|-------------------------|--|---|
| G-Sensor sensitivity | Adjust the sensitivity of G-sensor, it is recommended to adjust to "Low". | Off/Low/ Medium/ High |
| Default booting display | The mode displayed on the screen | Split Screen/ Front camera/ Rear camera |
| Volume setting | Adjust the volume | / |
| Clock Settings | No need to set it by default. If you need to set it manually, please turn off the GPS to automatically set the time before setting it. | / |

Customizing Your T700

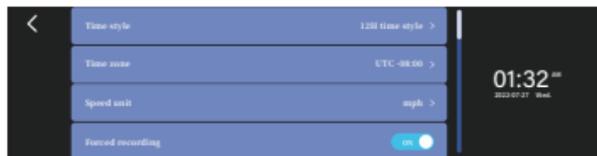

| Function | Function Description | Function Options |
|------------------|--|-----------------------------------|
| Time style | / | 24H Time style/ 12H Time style |
| Time zone | Time Zone | UTC -08:00 |
| Speed Unit | Set the vehicle speed display mode. | km/h/mph |
| Forced recording | If you stay in other interface and forget to record video, it will force to start recording. | On/Off |

Customizing Your T700

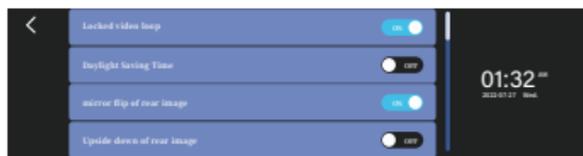

| Function | Function Description | Function Options |
|---------------------------|---|------------------|
| Locked video loop | The principle of the loop recording function is to only overwrite the unlocked normal video to record a new video. If you want to lock the video to be covered as well, please turn on this function. | Off/On |
| Daylight Saving Time | / | Off/On |
| mirror flip of rear image | Flip the recording horizontally. | On/Off |
| Upside down of rear image | Flip the recording direction up and down. | On/Off |

Customizing Your T700


Mirror Image



Rear Image



Customizing Your T700

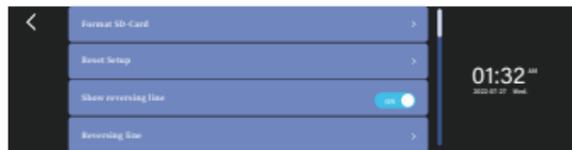

| Function | Function Description | Function Options |
|---------------------|---|------------------|
| Format SD-Card | This feature will allow you to format inserted memory card, all the data will be deleted. | OK/Cancel |
| Reset Setup | All settings will be deleted | OK/Cancel |
| Show reversing line | / | Off/On |
| Reversing line | Adjust the reversing line | / |


Customizing Your T700

NOTE

If your car does not have a reversing system and you need a backup reversing system as an aid, you need to connect the red cable of the rear cam to the positive pole of your reversing lamp. If your car already has a reversing system, you just ignore the red cable on the rear cam.

When you shift to "r" gear, the rear view will automatically show on the screen with reversing lines for easy and safe parking. You can enter the "Reversing line" option in the settings, then adjust the angle of the reversing image and the reversing line. Also when in reversing, you can adjust the viewing angle of the image. (This function activates after the red wire of the rear camera is connected to the positive pole of the reversing light.)

Customizing Your T700

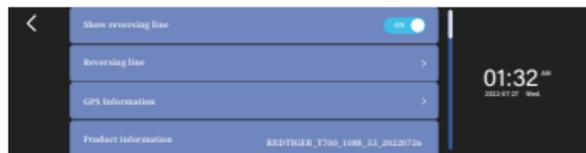


| Function | Function Description | Function Options |
|---------------------|---|------------------|
| GPS Information | Check the GPS signal reception details. (Number, Time, Longitude, Latitude) | / |
| Product Information | Check the product model and firmware version. | / |

Customizing Your T700

Playback Mode

When you turn on the power, the dash cam will start recording automatically. Click  to enter the playback mode.

Playback menu

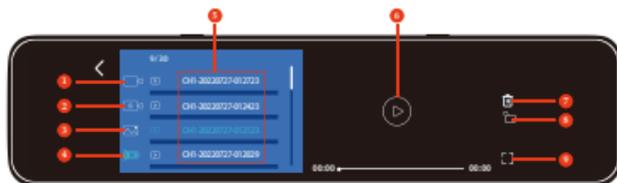

1. Loop recording files
2. Locked video files
3. Snapshot files
4. Switch the front view or rearview video file list
5. List of video files
6. Play/Pause
7. Delete specified file
8. Lock/Unlock specified file
9. View videos on fullscreen

Customizing Your T700

CAUTION

- The front-view video and the rear-view video are displayed in different file lists.
- You need to click  to switch between the front-view video list and the rear-view video list.

GPS Player (PC)


DOWNLOAD GPS PLAYER

Download our GPS Player from website:

<https://www.redtigercam.com/pages/gps-player>



Transfer your record to computer

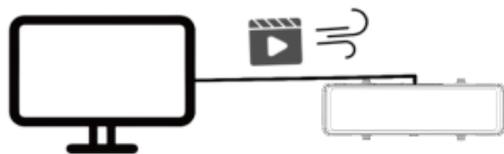


Drag in GPS Player



GPS Player (PC)

USE YOUR GPS PLAYER

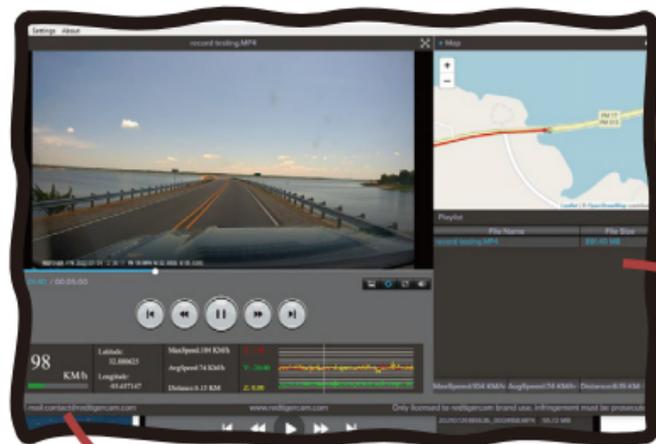


Footage Track

| File Name | File Size |
|-----------------------|-----------|
| 726185635_000415A.MP4 | 180.76 MB |
| 726185635_000415B.MP4 | 55.72 MB |

Choose to see your Front / Rear View

GPS Player (PC)

USE YOUR GPS PLAYER

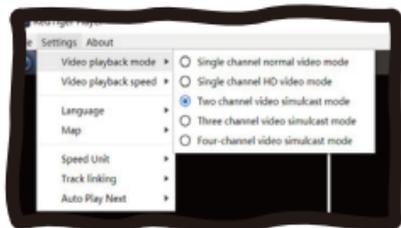

Watching Front & Rear at the same time



Front



Rear



Folder

Customer Service

WORDS FROM HEART

Since our products are related to the safety of customers, we are committed to product quality and high-quality after-sales, we want to achieve the best product quality. And there will inevitably be defective products showing up which we feel deeply sorry for those customers.

Thank you for making me a better seller.

We are willing to provide 1 month free return for your product. 1 year limited warranty, and lifetime technical support. Your product is guaranteed to be free of defects in materials and products from the date of purchase. In addition, you can also exchange your 1 year old product for a discounted price by contacting us online.

Please feel free to let me know if there is any further problem with the product, it's such a pleasure to listen to your advice, and we will figure it out.

Wish you all the best, sincerely
Redtiger Customer Service Team”.

Email

Mirror Dash Cam

Email: support@redtigerscam.com

Mini Dash Cam

Email: help@redtigerscam.com

Business Cooperation or Others Email:

contact@redtigerscam.com

Customer Phone Service:

+1 888 966 8028

Business Day, Mon-Fri

6 AM-12 AM, 1 PM-8 PM

EST (GMT-4)



E-MIAL



WHATS
APP



FACE
BOOK



LINE

IC warning:

This device contains licence-exempt transmitter(s)/receiver(s)/ that comply with Innovation Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- 1) this device may not cause interference and
- 2) this device must accept any interference, including interference that may cause undesired operation of the device.


Radiation Exposure: This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment; To maintain compliance with IC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance of 20cm the radiator your body. This device and its antenna(s) must not be co-located or operation in conjunction with any other antenna or transmitter.

Déclaration de l'ISED Canada :

Cet appareil contient des tasmittre (s) / récepteur (s) sans licence / conformes à l'innovationRSS exemptes de licence de Sciences et Développement économique Canada. L'opération est sous réserve des deux conditions suivantes :

- 1) cet appareil ne peut pas causer d'interférences et
- 2) cet dispositif doit accepter toute interférence, y compris peut provoquer le fonctionnement indésirable de l'appareil.

Exposition aux rayonnements : Cet équipement est conforme aux radiations du Canada limites d'exposition pour un environnement incontrôlé noncé d'exposition RF Pour maintenir le respect des guides d'exposition RF d'IC, cquipment doit être installé et actionné avec une distance minimale de 20cm le radiateur de votre corps. Cet appareil et ses antennes ne doivent pas être co-localisé ou en opération en conjonction avec toute autre antenne ou émetteur.

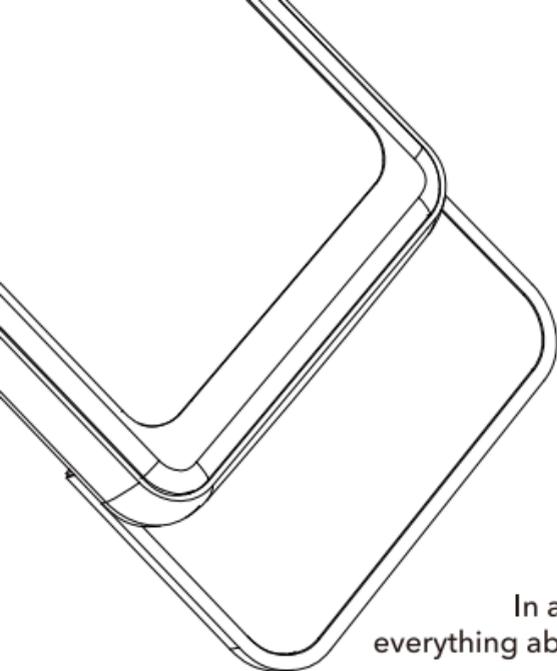

Redtiger

Always go-to dash cam



About Us

In an automobile-interconnection era,
everything about charm journey is within the reach of eyes.

Product and service are the foundation of Redtiger. We have an expert research and development team of "self-driving experts per capita".

Based on the personal needs of users,
we use technology to drive product innovation.

In the future, we will continue to explore the boundaries of tech to open up
a broader vision for driving.

