


AW-D116 is an addressable annunciator, which can be configured with Asenware AW- FP100 Series Addressable Fire Alarm Control Panel.

AW-D116 is provided using an 80 character, back-lit, alphanumeric display. Information Messages includes for Alarm, Fault, Supervisory and General Conditions in a clear and descriptive English Language.


Moreover, LEDs for Fire, Supervisory and Alarm are also provided with ACK push button. From the Silence push button, panel and Remote Notification appliances can be silenced.

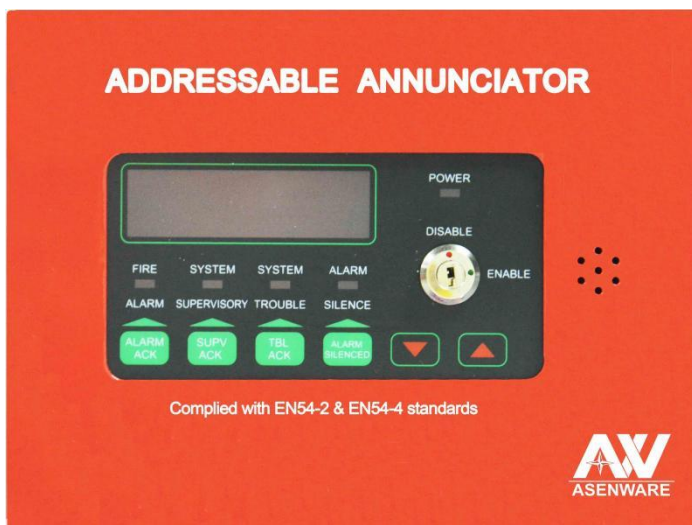

Features

- ✓ Addressable-analog communication
- ✓ Two Lines of 40 Character each LCD
- ✓ LED Indication for Alarm, Fault and Supervisory
- ✓ Push Buttons to acknowledge and silence the alarm
- ✓ Lamp Test from Key Switch

Installation

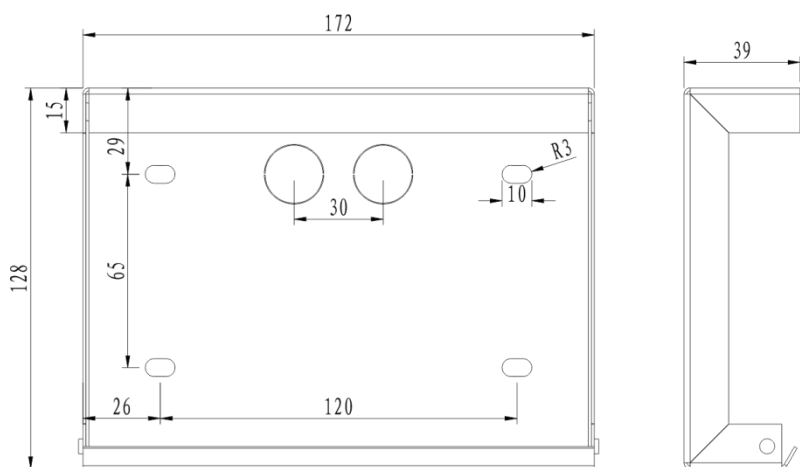

Technical Specification

Model	AW-D116
Operating voltage	18~28VDC @Loop
Operating current(@Loop 24VDC)	Monitoring status≤30mA
Wiring	The promise of two bus system(Loop in, Loop out)
Protection level	IP 30
Environmental	Temperature range: -10~ 50°C (14~122°F) Humidity: 5 to 95% RH, non-condensing
Mating host	AW-FP100 series fire alarm control panel
Size (L*W*H)	172mm* 128mm* 39mm