

| 260HP Bulldozer Series

SD26 Series

X

- * WEICHAI WP12G280E304 engine features strong power and high efficiency and energy-saving.
- * The high reliability power shift transmission, the stable hydraulic torque converter, and two-stage spur gear final drive feature high power transmission efficiency.
- * The engine can run normally and reliably under all load conditions and all hot environments required by the user, without overheating.
- * It can realize the automatic diagnosis and whole-process monitoring of the malfunctions. The integrally injection molded instrument panel integrates the A/C, electric devices, and instruments, featuring beautiful appearance and high grade.
- * The full box-type main frame with application of high performance materials and high strength castings features high carrying capacity against impact load and bending moment and the high quality welds guarantee the life cycle of the main frame.
- * The semi-rigid suspension traveling system increases the ground area of tracks and improves the traction force of vehicle.
- * The ergonomically designed driver seat and armrests can be adjusted easily in vertical and longitudinal directions. The gearshift, steering, and accelerator controls are arranged on the left side with the adoption of flexible shaft structure. The working device controls are arranged on the right side with adoption of servo control system to achieve lighter and more flexible operations and relieve the operating fatigue.
- * The standard straight tilting blade features powerful cutting force to handle diversified severe working environments and the large single-shank ripper of adjustable penetrating angle can be used for the ripping of clay and frozen earth as well as the stripping of hard working faces, such as gravel and hardened salt mine.



Performance Parameters:

- Length × Width × Height (mm) (excluding ripper): 5495×3725×3402
- Operating Weight (t) (excluding ripper): 23.4
- Engine Model: Weichai WP12G280E304
- Net Power/Rated Speed (kW/rpm): 194/1900
-
- Ground Pressure(Mpa): 0.066
- Blade Type: Straight tilting blade Angle blade U blade Semi-U blade
- Blade Capacity: 4.6 for straight tilting blade 3.4 for angle blade 6.7 for U blade 5.8 for Semi-U blade
- Applicable Working Conditions: Bulldozing, digging, landfill, and other bulk operations.

260HP Bulldozer Series

Power system

Weichai WP12G280E304 engines feature the high power, efficiency and energy saving.

- The effective supercharger not only improves and widens the effective zones of engine, but also drops the fuel consumption by 12-21g/ kW. H.
- The advanced lubrication system could enable the engine parts to work under the constant oil temperature, the low oil pressure and the varied flow, reducing the engine friction power and thus prolonging the engine service life.
- The strength material and the newly-structured cylinder body and cylinder cover make the engine more reliable and energy-saving and then realize the sufficient combustion and the lower emission within the wide range of RPM and load.



Drive system

The reliable power-shift transmission, the steady hydraulic torque converter and the stage-II spur-tooth final drive could perform the effective power output and produce the high efficiency.

- Planetary gear type transmission with power shift features the compact structure, steady engagement and high drive efficiency.
- YJ409B hydraulic torque converter has the circular cycle diameter of 409mm, 0.87 of high efficiency, simple structure such as monopole, single phase and three-element, and wide RPM range in high efficiency area.



Chassis system

- The semi-rigid suspension and travel system with the track rollers always in touch with the track could enlarge the ground area of track and thus raise the bulldozer traction.
- The strength king-pin tracks are developed specially for the poor working conditions, suitable for all complicated conditions because of its high reliability and the load-bearing capacity.

Cooling system

This system could guarantee the engine run normally and reliably under any load or hot condition, preventing against the engine overheating.

Electrical system

This system could realize the automatic diagnosis and the whole-course monitor. In addition, the injection instrument panel integrates the A/C, the electric equipments and the instruments, making more beautiful and upscale.

Driving environment

- The cabs have not only the beautiful shapes but also the super-large internal room and the wide vision. In addition, the damping devices could absorb the vibration, providing the more safety and comfort to the operators.
- According to the man-machine engineering, the driver's seat and handle could be easily adjusted upward, downward, forward and backward. In addition, the speed control, the steering wheel and the accelerator are on left side and adopt the cable type. The working equipment is on right side and adopts the servo-control system, realizing the flexible process and relieving the fatigue.

Structure

The main frame of box type adopts the quality material and the strength castings and enjoys the high impact load and torsion. In addition, the quality welding seam could ensure the main frame works in its life cycle.

Accessories for working parts

- The standard straight shovels have the excellent durability due to the high cutting force, high-strength structure and high-performance material and thus are available for all tough environments. In addition, the shovels of 4.6m³ high-capacity are suitable for all kinds of earthworks and the bulk materials. Besides, the angle shovels, U-shovels and semi U-shovels are available to users.



- Large single-tooth ripper with the adjustable penetration angle is used to loosen the soil layers such as the clay and the frozen soil and to peel off the solid surface such as the gravels and the hardened salt mine. The work efficiency and the super penetration are guaranteed with the strength beam, the frame and the tempered tooth bar and tip.



Safety

- The safe warning lamp, the reversing alarm, the horn, the excellent brake and the distinctive painting could effectively protect the periphery personnel and enhance the safety in all-weather operations. In addition, the seatbelt, the handles and the safe signs give the security protection to the operators.
- The side guard could effectively protect the engine and the radiator from being blocked and damaged due to the foreign particles, making the entire machine more beautiful.
- The standard antifreeze could raise the boiling point and lower the freezing point, effectively preventing against the scales depositing on the engine and the radiator, beneficial to the engine cooling and the protection.
- In addition, the sport bars for litters and others are optional and could protect the operators in emergency.



Maintenance

- The eye-catching signs say accurately when to maintain the machine. In addition, this battery is maintenance-free. In addition, the open-type hood could have the inside parts exposed as much as possible, easily realizing the inspection and the maintenance.
- This maintenance cost is much lower than others due to the reliability and thus the long Mean Time Between Failures (MTBF).
- Shantui perfect service network, as well as timely, thoughtful and warmhearted service, could give your assurance to use this machine, satisfying the expectancy for Shantui products.

260HP Bulldozer Series



SD26C Coal Bulldozers

FEATURES

Features the advanced technologies, high reliability, low fuel consumption and the convenient maintenance. The high-capacity coal shovels and the engine intake pre-filter are suitable for transferring, paving and piling of coals.



SD26D Desert Bulldozers

FEATURES

- SD26D desert bulldozers are designed specially for desert working conditions, featuring the advanced technologies, high reliability, low fuel consumption and convenient maintenance.
- The ground specific pressure is greatly lowered by using the extended trolley, featuring the excellent desert trafficability.
- The high-capacity radiator and the engine intake pre-filter are mounted, able to be suitable for hot and windy features in desert and semi-desert areas.



SD26F Forest Logging Type Bulldozers

FEATURES

- SD26F forest logging type bulldozers are designed specially for the forest working conditions, featuring the advanced technologies, high reliability, low consumption, and convenient maintenance. Furthermore, the anti-rolling cab for logging is provided.
- The anti-rolling cab and its shed special for logging, 610mm wide track and mechanical winch (optional) have the good trafficability and the self-help performance, suitable for lumbering, collecting and dragging of lumbers in rainforest and tree farm.



SD26R Sanitation Bulldozers

FEATURES

- SD26R sanitation bulldozer adopts the wetland bulldozer chassis, greatly reducing the ground specific pressure and improving the trafficability. This bulldozer is really suitable for filling or compacting of household garbage.
- High warning lamp, reversing alarm, camera, LED and other special devices are mounted, enhancing the field safety.
- The large-capacity garbage shovel and the scraper are provided, greatly improving the working efficiency.



SD26W Rock Bulldozers

FEATURES

- SD26W rock bulldozers are designed specially for rock-working conditions, featuring the advanced technologies, high reliability, low fuel consumption and convenient maintenance.
- They are equipped with the strength rock shovels.

SD26S Wetland Bulldozer


FEATURES

- SD26S wetland bulldozers are designed specially for wetland working conditions, featuring the advanced technologies, high reliability, low fuel consumption and convenient maintenance.
- The ground specific pressure is greatly lowered by using the extended trolley and the 910mm wide wetland track, featuring the excellent desert trafficability.


SPECIFICATIONS

ENGINE		SD26	SD26F	SD26E	SD26S
Engine		WEICHAI WP12			
Emission		China-III			
Rated revolution		1900rpm			
Gross power		206kW(277hp)@1900rpm			
Net power		194kW(260hp)@1900rpm			
Number of cylinder-bore×stroke		6-126X155mm			
Displacement		11.596L			
Max. torque		1250N.m@1200-1300rpm			
Cooling system		Mechanic fan			
DRIVE SYSTEM		SD26	SD26F	SD26E	SD26S
Drive system		Manufactured by SHANTUI, with high working efficiency, low breakdown rate; torqflow transmission, 3 gears forward and 3 gears backward.			
Traveling speed	Forward	F1:3.8km/h F2:6.9km/h F3:11.8km/h			
	Backward	R1:4.5km/h R2:8.1km/h R3:13.9km/h			
Max. theoretical traction force		460kN			
Torque converter		3-element, single stage, 1-phase			
Transmission		Planetary gear and torqflow transmission hydraulically actuated, forced lubrication			
Central drive		Spiral bevel gear, single-stage speed reduction, splash lubrication			
Steering clutch		Wet multiple disc, disc spring loaded, hydraulically actuated, hand operated, interconnected with steering brake.			
Brake clutch		Wet, contracting band, foot operated with hydraulic booster			
Final drive		Spur gear, double reduction ,splash lubrication			
CHASSIS SYSTEM		SD26	SD26F	SD26E	SD26S
Type		Swing type of sprayed beam, suspended structure of equalizer bar			
Track shoe type		Single grouser			Wetland type
Track gauge		2000mm			
Width of track shoe		560/610/660mm	610/660mm	560/610/660mm	910mm
Track grounding length		2730mm		3050mm	3480mm
Track grounding area		28727cm²	34733cm²	38317cm²	71476cm²
Number of track shoe		38 pcs/side	38 pcs/side	41 pcs/side	45 pcs/side
Grounding pressure (standard configuration)		66kPa	64kPa	66kPa	35.2kPa
Number of carrier roller		2 pcs/side			
Number of track roller		6pcs/side		7pcs/side	8pcs/side
Pitch		206mm			
VOLUME		SD26	SD26F	SD26E	SD26S
Fuel capacity		450L			
Coolant liquid capacity		69L			
Engine oil capacity		24L			
Hydraulic oil tank		110L			
Transmission		122L			
Final drive		82L/side			102L/side
OPERATING WEIGHT		SD26	SD26F	SD26E	SD26S
Operating weight (standard)		23450kg	24700kg	24600kg	25700kg

BLADE		SD26	SD26F	SD26E	SD26S
Blade type		Straight-tilt /Angle/Semi-U/U blade			Straight-tilt blade
Blade capacity		4.6/3.4/6.7/5.8m³			5.2m³
DIMENSION		SD26	SD26F	SD26E	SD26S
A	Machine height (without ROPS)	3402mm			
B	Track grouser height	72mm			123mm Wetland type
C	Ground clearance	405mm			513mm
D	Machine length (without draw bar)	5462mm		5712mm	6257mm
E	Machine length (with draw bar)	5495mm		5745mm	6290mm
F	Max. lifting height of blade	1210mm			1330mm
G	Max. digging depth of blade	540mm			550mm
H	Digging angle of blade	55°(deg.)			
I	Blade width	3725mm			4365mm
J	Blade height	1315mm			1248mm
O	Width from end of left track shoe to end of right track shoe (standard)	3000mm			3800mm

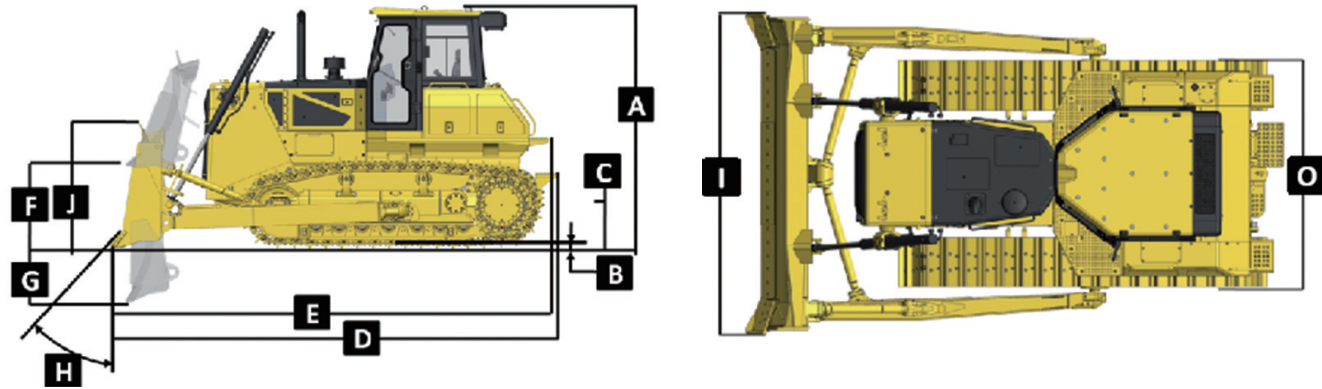

PARAMETER OF RIPPER		
Type	Three-shank ripper	Single shank ripper
Weight	2600kg	2450kg
Q	Max. ripping depth	666mm
R	Max. lifting height	555mm
S	Ripper length (at deepest ripping)	1781mm
T	Ripper width	2158mm
U	Departure angle (at highest lifting)	25.5°
V	Ripping width	2000mm
W	Distance between ripper teeth	930mm

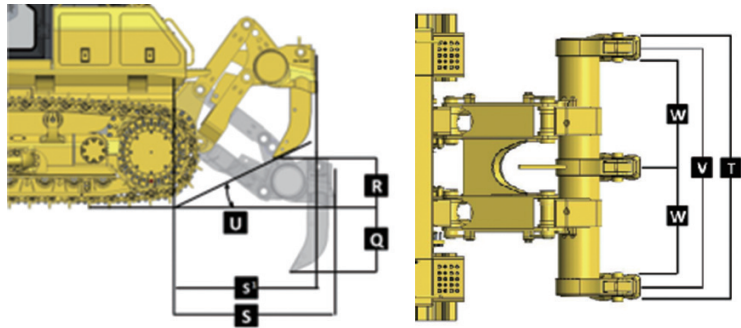

* The specifications are subject to change without notice. The pictures may include options. The actual color & appearance of the product may differ from what is shown.