





According to national standards, our company has realized the automation of parameter sampling, alarming, data analysis, and report generation during the hydraulic test of fire trucks, and can complete the water diversion time and reliability tests required by fire truck standards, as well as fire-fighting and pump flow tests...etc. Self-inspection system to ensure product quality.

公司拥有55000平方米现代化厂房、3000平方米的精加工车间、6000平方米的办公大楼、200平方米的研发中心、2500平方米的检测中心，各类高新、精设备500多台套。检测手段完备，各种硬件设备完善。公司拥有独立出口权，产品出口到非洲、亚洲、南美等多个地区和国家。

The company has 55,000 square meters of modern workshops, 3,000 square meters of finishing workshops, 6,000 square meters of office buildings, 200 square meters of R&D center, 2,500 square meters of testing center, and more than 500 sets of various high-tech and sophisticated equipment. Complete testing methods, complete various hardware equipment. The company has independent export rights, and its products are exported to Africa, Asia, South America and other regions and countries.



发车案例

Start case

公司主要生产市政系列（消防车、清障车、高空作业车），环卫系列（洒水车、垃圾车、吸污车、吸粪车、高压清洗车），罐式系列（加油车、化工罐车、混凝土搅拌车、散装水泥车），厢式系列（冷藏车、防爆车、厢式车），自卸工程系列（自卸车、随车起重运输机、电力工程车）等多种系列200多个品种。

其中消防车系列包含水罐消防车、泡沫消防车、干粉消防车、机场消防车、抢险救援消防车、器材消防车、自装卸式消防车、森林消防车、照明消防车、远程供水消防车、排烟消防车等多个品种，还可根据客户的实际需求，进行研制生产。



The company mainly produces municipal series (fire trucks, wrecker trucks, aerial work trucks), sanitation series (sprinklers, garbage trucks, sewage suction trucks, fecal suction trucks, high-pressure cleaning trucks), tank series (fuel trucks, chemical tank trucks, More than 200 varieties of various series including concrete mixer trucks, bulk cement trucks), van series (refrigerated trucks, explosion-proof trucks, vans), dump engineering series (dump trucks, truck-mounted crane transporters, electric engineering trucks), etc. .

The fire truck series include water tank fire trucks, foam fire trucks, dry powder fire trucks, airport fire trucks, rescue fire trucks, equipment fire trucks, self-loading fire trucks, forest fire trucks, lighting fire trucks, remote water supply fire trucks, Many varieties, such as smoke exhaust fire trucks, can also be developed and produced according to the actual needs of customers.



目录

table of Contents

A

微型消防车

- 01 1.0T水罐消防车
1.0T Water tank fire truck

B

轻型消防车

- 02 2.5T水罐消防车
2.5T Water tank fire truck
- 03-04 2.5T水罐/泡沫消防车
2.5T Water tank/foam fire truck
- 05-06 2.5T水罐消防车
2.5T Water tank fire truck
- 07-08 3.5-4T水罐/泡沫消防车
3.5-4T Water tank/foam fire truck
- 09-10 4T水罐/泡沫消防车
4T water tank/foam fire truck

C

中型消防车

- 11-12 5T-6T泡沫/水罐消防车
5T-6TFoam/water tank fire truck
- 13-14 7T-8T泡沫/水罐消防车
7T-8TFoam/water tank fire truck
- 15-16 8T泡沫/水罐消防车
8T foam/water tank fire truck
- 17 8T泡沫/水罐消防车
8TFoam/water tank fire truck

D

重型消防车

- 18 15T泡沫/水罐消防车
15TFoam/water tank fire truck
- 19 17T泡沫/水罐消防车
17TFoam/Water Tank Fire Truck
- 20 24T泡沫/水罐消防车
24T Foam/water tank fire truck

E

干粉联用消防车

- 21 4T干粉泡沫
4T Dry powder foam
- 22 6.5T干粉泡沫/干粉水联用消防车
6.5T dry powder foam/dry powder water combined fire truck
- 23 11T干粉泡沫/干粉水联用消防车
11T dry powder foam/dry powder water combined fire truck

F

抢险救援消防车

- 24 器材消防车
Equipment fire truck
- 25 器材消防车
Equipment fire truck
- 26 自装卸式消防车
Self-loading fire truck
- 27-28 抢险救援消防车
Rescue fire truck

G

城市主战消防车

- 29-30 城市主战消防车
City main battle fire truck

H

应急保障车

- 31 应急保障净水车
Emergency Guarantee Water Purifier
- 32 应急保障宿营车
Emergency support camper
- 33 应急保障淋浴车
Emergency shower car
- 34 应急保障炊事车
Emergency support cooking car

I

消防宣传车

- 35 消防宣传车
Airport fire truck

J

机场消防车

- 36 机场消防车
Airport fire truck

YZR5040GXFSG06/Q6A

1.0T水罐消防车

1.0T water tank fire truck

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
QL1040BUFVY	4KH1CN6LB	88Kw

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	外形尺寸 (mm) Dimensions
4X2	95Km/h	2765mm	5510x1930x2940

乘员人数 Number of crew	总质量 Total quality	接近角/离去角 Approach / departure angle
2+3	4360kg	24° / 16°

罐体容积 Tank volume	消防炮型号 Fire monitor model
水1000L	PS8/20W

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/20 常压消防泵	20L/s@1.0MPa

消防炮额定流量 Fire monitor rated flow	消防炮射程 Dry powder gun range
20L/s@0.8MPa	≥50m



YZR5070GXFSG25/B6A

2.5T水罐消防车

2.5T water tank fire truck

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
BJ1076VEADA-51	028-130C60	96KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	外形尺寸 (mm) Dimensions
4X2	95Km/h	3360mm	6370x2100x2770

乘员人数 Number of crew	总质量 Total quality	接近角/离去角 Approach / departure angle
3+3	7100kg	24° / 15°

罐体容积 Tank volume	消防炮型号 Fire monitor model
水2500L	PS8/20W

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/20 常压消防泵	20L/s@1.0MPa

消防炮额定流量 Fire monitor rated flow	消防炮射程 Dry powder gun range
20L/s@0.8MPa	≥50m



YZR5071GXFSG20/Q6A

2.5T水罐消防车（内藏罐）

2.5T water tank fire truck (built-in tank)

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
QL1070BUKWY	4KH1CN6LB	88Kw

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	外形尺寸 (mm) Dimensions
4X2	95Km/h	3815mm	6850x1900x2840

乘员人数 Number of crew	总质量 Total quality	接近角/离去角 Approach / departure angle
2+3	6750kg	24° / 13°

罐体容积 Tank volume	消防炮型号 Fire monitor model
水2500L	PS8/20W

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/20 常压消防泵	20L/s@1.0MPa

消防炮额定流量 Fire monitor rated flow	消防炮射程 Dry powder gun range
20L/s@0.8MPa	≥50m



YZR5070GXFSG20/Q6

2.5T水罐消防车（外露罐）

2.5T water tank fire truck (exposed tank)

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
QL1070BUKWY	4KH1CN6LB	88Kw

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	外形尺寸(mm) Dimensions
4X2	95Km/h	3815mm	6920x1950x2950

乘员人数 Number of crew	总质量 Total quality	接近角/离去角 Approach / departure angle
2+3	6800kg	24° / 12°

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/30 常压消防泵	30L/s@1.0MPa

水罐车 Water tanker	罐体容积 Tank volume	水2500L
	消防炮型号 Fire monitor model	PS8/20W
	消防炮额定流量 Fire monitor rated flow	20L/s@0.8MPa
	消防炮射程 Fire monitor range	≥50m

泡沫车 Foam car	罐体容积 Tank volume	水1500L 泡沫1000L
	消防炮型号 Fire monitor model	PL8/24
	消防炮额定流量 Fire monitor rated flow	24L/s@0.8MPa
	消防炮射程 Fire monitor range	≥55m (水) ≥42m (泡沫)

● 水罐泡沫容积可定制

YZR5070GXFPM20/Q6

2.5T泡沫消防车（外露罐）

2.5T foam fire truck (exposed tank)



YZR5071GXFSG25/E6A

2.5T水罐消防车（内藏罐）

2.5T water tank fire truck (built-in tank)

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
EQ1075DJ3CDF	Q23-115E60	85Kw

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew
4X2	100Km/h	3308mm	2+3

外形尺寸(mm) Dimensions	总质量 Total quality	接近角/离去角 Approach / departure angle
6170x2030x2720	6900kg	24° / 15°

罐体容积 Tank volume	消防泵型号 Fire pump model	消防泵流量 Fire pump flow
水2500L	CB10/20 常压消防泵	20L/s@1.0MPa

消防炮型号 Fire monitor model	消防炮额定流量 Fire monitor rated flow	消防炮射程 Fire monitor range
PS8/20W	20L/s@0.8MPa	≥50m



YZR5070GXFSG20/E6

2.5T水罐消防车（外露罐）

2.5T water tank fire truck (exposed tank)

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
EQ1075DJ3CDF	Q23-115E60	85Kw

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew
4X2	100Km/h	3308mm	2+3

外形尺寸(mm) Dimensions	总质量 Total quality	接近角/离去角 Approach / departure angle
6090x1980x2640	6620kg	24° / 15°

罐体容积 Tank volume	消防泵型号 Fire pump model	消防泵流量 Fire pump flow
水2500L	CB10/20 常压消防泵	20L/s@1.0MPa

消防炮型号 Fire monitor model	消防炮额定流量 Fire monitor rated flow	消防炮射程 Fire monitor range
PS8/20W	20L/s@0.8MPa	≥50m



YZR5100GXFSG30/Q6

3.5T水罐消防车 (外露罐)

3.5T water tank fire truck (exposed tank)

YZR5100GXFPM30/Q6

3.5T泡沫消防车 (外露罐)

3.5T foam fire truck (exposed tank)

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
QL1110ANKAY	4HK1-TCG61	139KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	外形尺寸(mm) Dimensions
4X2	100Km/h	3815mm	6920x2270x3080

乘员人数 Number of crew	总质量 Total quality	接近角/离去角 Approach / departure angle
2+3	10200kg	20° / 12°

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/40 常压消防泵	40L/s@1.0MPa

水罐车 Water tanker	罐体容积 Tank volume	水3500L
	消防炮型号 Fire monitor model	PS8/40W
	消防炮额定流量 Fire monitor rated flow	40L/s@0.8MPa
	消防炮射程 Fire monitor range	≥65m

泡沫车 Foam car	罐体容积 Tank volume	水2500L 泡沫1000L
	消防炮型号 Fire monitor model	PL8/32
	消防炮额定流量 Fire monitor rated flow	32L/s@0.8MPa
	消防炮射程 Fire monitor range	≥60m (水) ≥48m (泡沫)

● 水罐泡沫容积可定制



YZR5100GXFSG35/Q6A

4T水罐消防车 (内藏罐)

4T water tank fire truck (built-in tank)

YZR5100GXFPM35/Q6A

4T泡沫消防车 (内藏罐)

4T foam fire truck (built-in tank)

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
QL1110ANKAY	4HK1-TCG61	139KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	外形尺寸(mm) Dimensions
4X2	100Km/h	3815mm	6945x2250x3130

乘员人数 Number of crew	总质量 Total quality	接近角/离去角 Approach / departure angle
3+3	9700kg	20° / 14°

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/40 常压消防泵	40L/s@1.0MPa

水罐车 Water tanker	罐体容积 Tank volume	水4000L
	消防炮型号 Fire monitor model	PS8/40W
	消防炮额定流量 Fire monitor rated flow	40L/s@0.8MPa
	消防炮射程 Fire monitor range	≥65m

泡沫车 Foam car	罐体容积 Tank volume	水3000L 泡沫1000L
	消防炮型号 Fire monitor model	PL8/32
	消防炮额定流量 Fire monitor rated flow	32L/s@0.8MPa
	消防炮射程 Fire monitor range	≥60m (水) ≥48m (泡沫)

● 水罐泡沫容积可定制



YZR5100GXFSG40/E6A

4T水罐消防车(内藏罐)

4T water tank fire truck (built-in tank)

YZR5100GXFPM40/E6A

4T泡沫消防车(内藏罐)

4T foam fire truck (built-in tank)



主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
EQ1125SJ8CDC	YCY30615-60	121KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew
4X2	100Km/h	3800mm	3+3

外形尺寸(mm) Dimensions	总质量 Total quality	接近角/离去角 Approach / departure angle
7050x2270x3100	10200kg	21° / 12°

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/30 常压消防泵	30L/s@1.0MPa

水罐车 Water tanker	罐体容积 Tank volume	水4000L	
	消防炮型号 Fire monitor model	PS8/30W	
	消防炮额定流量 Fire monitor rated flow	30L/s@0.8MPa	
	消防炮射程 Fire monitor range	≥60m	

泡沫车 Foam car	罐体容积 Tank volume	水3000L 泡沫1000L	
	消防炮型号 Fire monitor model	PL8/24	
	消防炮额定流量 Fire monitor rated flow	24L/s@0.8MPa	
	消防炮射程 Fire monitor range	≥55m (水) ≥42m (泡沫)	

● 水罐泡沫容积可定制



YZR5110GXFSG40/Z6A

4T水罐消防车 (内藏罐)

4T water tank fire truck (built-in tank)

YZR5110GXFPM40/Z6A

4T泡沫消防车 (内藏罐)

4T foam fire truck (built-in tank)

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
ZZ1117G3815F112	WP3NQ160E61	118KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew
4X2	95Km/h	3800mm	3+3

外形尺寸(mm) Dimensions	总质量 Total quality	接近角/离去角 Approach / departure angle
7060x2320x3100	10700kg	18° / 13°

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/30 常压消防泵	30L/s@1.0MPa

水罐车 Water tanker	罐体容积 Tank volume	水4000L
	消防炮型号 Fire monitor model	PS8/30W
	消防炮额定流量 Fire monitor rated flow	30L/s@0.8MPa
	消防炮射程 Fire monitor range	≥60m

泡沫车 Foam car	罐体容积 Tank volume	水3000L 泡沫1000L
	消防炮型号 Fire monitor model	PL8/24
	消防炮额定流量 Fire monitor rated flow	24L/s@0.8MPa
	消防炮射程 Fire monitor range	≥55m (水) ≥42m (泡沫)

● 水罐泡沫容积可定制



YZR5110GXFSG50/E6 5T水罐消防车（外露罐）

4T water tank fire truck (Exposed tank)

YZR5110GXFPM50/E6 5T泡沫消防车（外露罐）

4T foam fire truck (Exposed tank)



主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
EQ1125SJ8CDC	CY4SK361	125KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew
4X2	100Km/h	3800mm	3+3

外形尺寸(mm) Dimensions	总质量 Total quality	接近角/离去角 Approach / departure angle
7030x2220x3050	11400kg	21° / 11°

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/30 常压消防泵	30L/s@1.0MPa

水罐车 Water tanker	罐体容积 Tank volume	water4000L
	消防炮型号 Fire monitor model	PS8/30W
	消防炮额定流量 Fire monitor rated flow	30L/s@0.8MPa
	消防炮射程 Fire monitor range	≥60m

泡沫车 Foam car	罐体容积 Tank volume	water6000L foam 1000L
	消防炮型号 Fire monitor model	PL8/24
	消防炮额定流量 Fire monitor rated flow	24L/s@0.8MPa
	消防炮射程 Fire monitor range	60m (water) 48m (foam)



YZR5130GXFSG60/B6 6T水罐消防车（外露罐）

6T water tank fire truck (Exposed tank)

YZR5130GXFPM60/B6 6T泡沫消防车（外露罐）

6T foam fire truck (Exposed tank)

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
BJ114VKPFD-02	WP4.1NQ190E61	140KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew
4X2	90Km/h	4300mm	3+3

总质量 Total quality	接近角/离去角 Approach / departure angle	外形尺寸(mm) Dimensions
13200kg	19° / 13°	7220x2410x3370

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/30 常压消防泵	30L/s@1.0MPa

水罐车 Water tanker	罐体容积 Tank volume	water6000L	
	消防炮型号 Fire monitor model	PS8/30W	
	消防炮额定流量 Fire monitor rated flow	30L/s@0.8MPa	
	消防炮射程 Fire monitor range	≥60m	

泡沫车 Foam car	罐体容积 Tank volume	water4500L foam 1500L	
	消防炮型号 Fire monitor model	PL8/24	
	消防炮额定流量 Fire monitor rated flow	24L/s@0.8MPa	
	消防炮射程 Fire monitor range	55m (water) 42m (foam)	



YZR5170GXFSG70/E6 7T水罐消防车（内藏罐）

7T water tank fire truck (Built-in jar)

YZR5170GXFPM70/E6 7T泡沫消防车（内藏罐）

7T foam fire truck (Built-in jar)

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
EQ1185DJ9CDF	B6.2NS6B230	169KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew
4X2	95Km/h	4700mm	3+3

总质量 Total quality	接近角/离去角 Approach / departure angle	外形尺寸(mm) Dimensions
17000kg	21° / 13°	8220X2500X3550

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/40 常压消防泵	40L/s

水罐车 Water tanker	罐体容积 Tank volume	water7000L
	消防炮型号 Fire monitor model	PS8/40W
	消防炮额定流量 Fire monitor rated flow	40L/s@0.8MPa
	消防炮射程 Fire monitor range	≥65m

泡沫车 Foam car	罐体容积 Tank volume	water5000L foam 2000L
	消防炮型号 Fire monitor model	PL8/32
	消防炮额定流量 Fire monitor rated flow	32L/s@0.8MPa
	消防炮射程 Fire monitor range	60m (water) 48m (foam)



YZR5170GXFSG80/E6

8T水罐消防车

8T water tank fire truck

YZR5170GXFPM80/E6

8T泡沫消防车

8T foam fire truck



主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
EQ1185DJ9CDF	B6.2NS6B230	169KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew
4X2	95Km/h	4700mm	3+3

总质量 Total quality	接近角/离去角 Approach / departure angle	外形尺寸(mm) Dimensions
17000kg	19° / 12°	8200X2500X3550

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/40 常压消防泵	40L/s

水罐车 Water tanker	罐体容积 Tank volume	water8000L
	消防炮型号 Fire monitor model	PS8/40W
	消防炮额定流量 Fire monitor rated flow	40L/s@0.8MPa
	消防炮射程 Fire monitor range	≥65m

泡沫车 Foam car	罐体容积 Tank volume	water6000L foam 2000L
	消防炮型号 Fire monitor model	PL8/32
	消防炮额定流量 Fire monitor rated flow	32L/s@0.8MPa
	消防炮射程 Fire monitor range	60m (water) 48m (foam)



YZR5190GXFSG80/H6

8T水罐消防车

8T water tank fire truck

YZR5190GXFPM80/H6

8T泡沫消防车

8T foam fire truck

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
ZZ5207TXFV471GF5	MC07.34-60	251KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew
4X2	100Km/h	4700mm	2+4

外形尺寸(mm) Dimensions	总质量 Total quality	接近角/离去角 Approach / departure angle
8820X2510X3570	19200kg	19° / 11°

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/60 常压消防泵	60L/s

水罐车 Water tanker	罐体容积 Tank volume	water7950L
	消防炮型号 Fire monitor model	PS8/50W
	消防炮额定流量 Fire monitor rated flow	50L/s@0.8MPa
	消防炮射程 Fire monitor range	≥70m

泡沫车 Foam car	罐体容积 Tank volume	water5950L foam 2000L
	消防炮型号 Fire monitor model	PL8/48
	消防炮额定流量 Fire monitor rated flow	48L/s@0.8MPa
	消防炮射程 Fire monitor range	70m (water) 60m (foam)



YZR5190GXFSG80/G6

8T水罐消防车

8T water tank fire truck

YZR5190GXFPM80/G6

8T泡沫消防车

8T foam fire truck



主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
ZZ5206N471GF5	MC07.33-60	240KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew
4X2	100Km/h	4700mm	2+4

外形尺寸(mm) Dimensions	总质量 Total quality	接近角/离去角 Approach / departure angle
8730x2510x3430	19300kg	16° / 11°

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/60 美国希尔消防泵	60L/s

水罐车 Water tanker	罐体容积 Tank volume	water8000L
	消防炮型号 Fire monitor model	阿密龙PSKD48ZB-5177E型遥控炮
	消防炮额定流量 Fire monitor rated flow	16-50L/s (自动调节)
	消防炮射程 Fire monitor range	≥70m

泡沫车 Foam car	罐体容积 Tank volume	water6000L foam 2000L
	消防炮型号 Fire monitor model	阿密龙PLKD48ZB-5177E型遥控炮
	消防炮额定流量 Fire monitor rated flow	16-48L/s (自动调节)
	消防炮射程 Fire monitor range	70m (water) 60m (foam)



YZR5190GXFSG80/Q6

8T水罐消防车

8T water tank fire truck

YZR5190GXFPM80/Q6

8T泡沫消防车

8T foam fire truck

主要技术参数

Main technical parameters

底盘型号 Chassis model		发动机型号 Engine model	发动机功率 Engine power
QL5220GXFFMFRY		6HK1-TCG60	221KW
驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew
4X2	105Km/h	4500mm	2+4
总质量 Total quality	接近角/离去角 Approach / departure angle		外形尺寸(mm) Dimensions
19450kg	17° / 12°		8240X2540X3650
消防泵型号 Fire pump model		消防泵流量 Fire pump flow	
CB10/60-XZ		60L/S@1.0MPa	
水罐车 Water tanker	罐体容积 Tank volume	water82000L	
	消防炮型号 Fire monitor model	PS8/50W	
	消防炮额定流量 Fire monitor rated flow	50L/s@0.8MPa	
	消防炮射程 Fire monitor range	≥70m	
泡沫车 Foam car	罐体容积 Tank volume	water6100L foam 2100L	
	消防炮型号 Fire monitor model	PL8/48	
	消防炮额定流量 Fire monitor rated flow	48L/s@0.8MPa	
	消防炮射程 Fire monitor range	70m (water) 60m (foam)	



YZR5310GXFSG150/G6

15T水罐消防车

15T water tank fire truck

YZR5310GXFPM150/G6

15T泡沫消防车

15T foam fire truck



主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
ZZ5356V524MF5	MC11.44-60	327KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew
6X4	90Km/h	4600+1400mm	2+4

总质量 Total quality	接近角/离去角 Approach / departure angle	外形尺寸(mm) Dimensions
31000kg	19° / 9°	10300x2550x3640

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/100常压消防泵	100L/S@1.0MPa

水罐车 Water tanker	罐体容积 Tank volume	water15000L	
	消防炮型号 Fire monitor model	PSKD8/80W	
	消防炮额定流量 Fire monitor rated flow	80L/s@0.8MPa	
	消防炮射程 Fire monitor range	≥85m	

泡沫车 Foam car	罐体容积 Tank volume	water12000L foam 3000L	
	消防炮型号 Fire monitor model	PLKD8/80	
	消防炮额定流量 Fire monitor rated flow	80L/s@0.8MPa	
	消防炮射程 Fire monitor range	85m (water) 80m (foam)	



YZR5320GXFSG170/T6

17T水罐消防车

17T water tank fire truck

YZR5320GXFPM170/T6

17T泡沫消防车

17T foam fire truck



主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
ZZ5357TXFV464MF5	MC11.44-60	327KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew
6X4	95Km/h	4600+1400mm	2+4

总质量 Total quality	接近角/离去角 Approach / departure angle	外形尺寸(mm) Dimensions
33250kg	19° / 11°	10280x2540x3680

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/80常压消防泵	80L/s@1.0MPa

水罐车 Water tanker	罐体容积 Tank volume	water17000L
	消防炮型号 Fire monitor model	PS8/70W
	消防炮额定流量 Fire monitor rated flow	70L/s@0.8MPa
	消防炮射程 Fire monitor range	≥80m

泡沫车 Foam car	罐体容积 Tank volume	water14500L foam 2500L
	消防炮型号 Fire monitor model	PL8/64
	消防炮额定流量 Fire monitor rated flow	64L/s@0.8MPa
	消防炮射程 Fire monitor range	75m (water) 70m (foam)



YZR5420GXFSG240/H6

24T水罐消防车

24T water tank fire truck

YZR5420GXFPM240/H6

24T泡沫消防车

24T foam fire truck



主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
ZZ5447TXFV466MF1	MC11.44-60	327KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase
8X4	90Km/h	1950+4600+1400mm

总质量 Total quality	接近角/离去角 Approach / departure angle
42000kg	19° / 11°

外形尺寸(mm) Dimensions	乘员人数 Number of crew
11920 × 2540 × 3660	2

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/100常压消防泵	100L/s@1.0MPa

水罐车 Water tanker	罐体容积 Tank volume	water24000L	
	消防炮型号 Fire monitor model	PS8/80W	
	消防炮额定流量 Fire monitor rated flow	80L/s@0.8MPa	
	消防炮射程 Fire monitor range	≥85m	

泡沫车 Foam car	罐体容积 Tank volume	water20000L foam 4000L	
	消防炮型号 Fire monitor model	PL8/80	
	消防炮额定流量 Fire monitor rated flow	80L/s@0.8MPa	
	消防炮射程 Fire monitor range	70m (water) 60m (foam)	

● 水罐泡沫容积可定制



YZR5170GXFGF40/H6

4T干粉消防车

4T dry powder fire truck

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
ZZ5207TXFV471GF5	MC07H.35-60	257KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	总质量 Total quality
4X2	95Km/h	4700mm	19450kg

乘员人数 Number of crew	接近角/离去角 Approach / departure angle	外形尺寸(mm) Dimensions
2+4	19° / 11°	8630x2540x3680

干粉消防车 Dry powder fire truck	干粉罐容积 Dry powder tank volume	2000L+2000L	
	干粉炮型号 Dry powder gun model	PF5 ~ 15/30	
	干粉炮喷射率 Dry powder gun injection rate	30kg/s ≤ E ≤ 35kg/s	
	干粉炮射程 Dry powder gun range	≥ 35m	

- 功率大、车速高、操作方便
- 广泛用于大中型城市公安消防队、石油化工、厂矿企业、港口码头等场所
- 可扑救大型油类火灾和一般物质火灾

High power, high speed and convenient operation
Widely used in public security fire brigade, petrochemical industry, factories and mines, ports and terminals in large and medium-sized cities
It can put out large oil fires and general material fires



YZR5190GXFGP70/H6 6.5T干粉泡沫联用消防车

6.5T dry powder foam combined fire truck

YZR5190GXFGL70/H6 6.5T干粉水联用消防车

6.5T dry powder water combined fire truck



主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
ZZ5207TXFV471GF5	MC07.34-60	251KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	总质量 Total quality
4X2	100Km/h	4700mm	19450kg

乘员人数 Number of crew	接近角/离去角 Approach / departure angle	外形尺寸(mm) Dimensions
2+4	19° / 11°	8630x2540x3700

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB10/60型常压消防泵	60L/S@1.0MPa

干粉泡沫联用 Dry powder foam Combine	罐体容积 Tank volume	干粉1500L 水3000L 泡沫2000L
	消防炮型号 Fire monitor model	PL8/48
	消防炮额定流量 Fire monitor rated flow	48L/s@0.8MPa
	消防炮射程 Fire monitor range	≥70m (水) ≥60m (泡沫)
	干粉炮喷射率 Dry powder gun injection rate	30kg/s ≤ E ≤ 35kg/s
	干粉炮射程 Dry powder gun range	≥35m

干粉水联用 Dry powder water Combine	罐体容积 Tank volume	干粉1500L 水5000L
	消防炮型号 Fire monitor model	PS8/50W
	消防炮额定流量 Fire monitor rated flow	50L/s@0.8MPa
	消防炮射程 Fire monitor range	≥70m
	干粉炮喷射率 Dry powder gun injection rate	30kg/s ≤ E ≤ 35kg/s
	干粉炮射程 Dry powder gun range	≥35m



- 功率大、车速高、操作方便
- 广泛用于大中型城市公安消防队、石油化工、厂矿企业、港口码头等场所
- 可扑救大型油类火灾和一般物质火灾

YZR5290GXFGP110/T6 11T干粉泡沫联用消防车

11T dry powder foam combined fire truck

YZR5290GXFGL110/T6 11T干粉水联用消防车

11T dry powder water combined fire truck

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
ZZ5357TXFV464MF5	MC11.44-60	327KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew
6X4	95Km/h	4600+1400mm	2+4

总质量 Total quality	接近角/离去角 Approach / departure angle	外形尺寸(mm) Dimensions
28800kg	19° / 11°	10360x2540x3740

消防泵型号 Fire pump model	消防泵流量 Fire pump flow
CB20.10/30.60型中低压消防泵	60L/s@1.0MPa ; 30L/s@2.0MPa

干粉泡沫联用 Dry powder foam Combine	罐体容积 Tank volume	water3000L foam 2000L dry powder1500L	
	消防炮型号 Fire monitor model	PL8/48	
	消防炮额定流量 Fire monitor rated flow	48L/s@0.8MPa	
	消防炮射程 Fire monitor range	70m (water)	60m (foam)
	干粉炮喷射率 Dry powder gun injection rate	30kg/s ≤ E ≤ 35kg/s	
	干粉炮射程 Dry powder gun range	≥ 35m	

干粉水联用 Dry powder water Combine	罐体容积 Tank volume	water5000L dry powder 1500L	
	消防炮型号 Fire monitor model	PS8/50W	
	消防炮额定流量 Fire monitor rated flow	50L/s@0.8MPa	
	消防炮射程 Fire monitor range	≥ 70m	
	干粉炮喷射率 Dry powder gun injection rate	30kg/s ≤ E ≤ 35kg/s	
	干粉炮射程 Dry powder gun range	≥ 35m	



- 广泛用于大中型城市公安消防队、石油化工、厂矿企业、港口码头等场所
- 可扑救大型油类火灾和一般物质火灾

YZR5060TXFQC60/Q6

器材消防车

Equipment fire truck

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
QL1070BUKWY	4KH1CN6LB	88KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase
4X2	95Km/h	3815mm

外形尺寸(mm) Dimensions	接近角/离去角 Approach / departure angle	总质量 Total quality
7350x1920x2980	24° / 12°	6000kg

前置绞盘 Front winch	最大拉力 Maximum pulling force	钢丝尺寸 Wire size
	3000kgs	9.2mmx30m

升降照明 Lifting lights	最大离地高度 Maximum ground clearance	主照灯 Main light
	≥6.7m	4X1000w

发电机 Generator	功率 Power	频率 Frequency	电压 Voltage
	10.5KW	50HZ	220/380V

The vehicle is equipped with an electric traction winch
A high-power generator set is installed in
the equipment box

Various fire fighting and emergency rescue equipment frames
and pallets can be built as required

The roof is also equipped with a lift lighting system



- 车辆配备电动牵引绞盘
- 器材箱内安装有大功率发电机组
- 可按需求搭建各种消防、抢险救援用器材框架、托板
- 车顶还配有升降照明系统



YZR5020TXFQC11/N6

纳瓦拉器材消防车

Nissan Navarra equipment fire truck

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
ZN1035UCK6B	QR25	140KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase
4x4	160km/h	3150mm

乘员人数 Number of crew	总质量 Total quality	外形尺寸(mm) Dimensions
2+3	3630kg	5266x1850x1808

● 该车采用郑州日产汽车生产的纳瓦拉底盘，驾驶室四门、双排座、司乘人员数5人，该底盘驾乘舒适轻便，噪音小，续航能力强，集治安管控、火灾预防巡逻、消防宣传教育、社区公共安全宣传、人员救助、初期火灾扑灭、火灾预警于一体。

● 车辆配有消防器材，并按照消防实战需要，根据消防操作程序，人性化设计，使用防锈蚀、防振动、防脱落、防划伤的专用夹具固定所有随车器材，器材布置合理、紧凑、装夹牢固、标示醒目，两个动作内可取用任何器材，可实现就近取放、多人操作，互不干涉。

● 车体外蒙皮接缝均施以汽车专用密封胶。车体其余部份过线采用过线胶圈并施以汽车专用密封胶，在密封的同时达到保护线束的目的。

The car adopts the Navarra chassis produced by Zhengzhou Nissan Motor, with a four-door cab, a double-row seat, and a number of 5 drivers and passengers. The chassis is comfortable and light to drive, has low noise, and has strong battery life. It integrates public security control and fire prevention. Patrol, fire publicity and education, public safety publicity in Du District, personnel rescue, initial fire extinguishing, and fire warning are integrated.

The vehicle is equipped with firefighting equipment, and according to the actual needs of firefighting, according to the firefighting exploration procedure, humanized design, use special fixtures for anti-rust, anti-vibration, anti-fall, and anti-scratch to trap all on-board equipment. The equipment is reasonably arranged, compact, firmly clamped, and clearly marked. Any equipment can be used in the two actions, which can realize the nearby pick-and-place, multi-person operation, and do not interfere with each other.

The outer skin joints of the car body are all applied with special sealant for automobiles. The rest of the car body passes through the wire using the wire apron and applies the special sealant for the car to achieve the purpose of protecting the wire harness while sealing.



YZR5210TXFQC160/T6

自装卸式消防车

Dump fire truck

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
ZZ5357TXFV464MF1	MC11.44-60	327kW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase
6X4	90Km/h	4600+1400mm

乘员人数 Number of crew	总质量 Total quality	外形尺寸(mm) Dimensions
2	34000kg	9460X2540X3740

拉臂钩 Pull arm hook	
品牌: 海沃	型号: 20-60-s
提升能力: 20000kg	重量: 2550kg
装载(提升)时间: ≤40s	卸载(放下)时间: ≤54s

- 根据应急救援的实际需求配备灭火器材
- 机械化装卸大大提高了器材保障运输的供给效率
- 适用于车辆、飞机、船艇等不同交通工具的运输
- 快速从灾区后方通过“海、路、空运输”，“短、中、长距离”立体联运，投送至应急救援第一现场
- 在最短时间内提供最大化的装备物资保障能力，尤其是为跨区域大型抢险救援任务提供有力保障

Equipped with fire-fighting equipment according to the actual needs of emergency rescue

Mechanized loading and unloading greatly improves the supply efficiency of equipment support transportation

Suitable for the transportation of vehicles, planes, boats and other means of transportation

Quickly from the rear of the disaster area through "sea, road and air transportation", "short, medium and long distance" three-dimensional combined transportation, and delivered to the first emergency rescue site

Provide maximum equipment and material support capabilities in the shortest time, especially for large-scale cross-regional rescue missions



YZR5140TXFJY130/H6 抢险救援消防车

Equipment fire truck

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
ZZ5207TXFV471GF5	MC07.34-60	251KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase
4X2	100Km/h	4700mm

外形尺寸(mm) Dimensions	接近角/离去角 Approach / departure angle	总质量 Total quality
9020x2540x3540	19° / 10°	14000kg

吊机 Crane	最大吊重 Maximum lifting weight	最大工作幅度 Maximum working range
	5000kg	8.3m

前置绞盘 Front winch	最大拉力 Maximum pulling force	钢丝尺寸 Wire size
	7000kgs	11.5mmx36m

升降照明 Lifting lights	最大离地高度 Maximum ground clearance	主照灯 Main light
	≥8m	4X1000w

发电机 Generator	功率 Power	频率 Frequency	电压 Voltage
	10.5KW	50HZ	220/380V

Equipped with electric traction winch
There is a high-power generator set in the equipment box

A variety of face grabbing teaching aid equipment frames and pallets can be built as needed
The roof is equipped with a lift lighting system
There is a hydraulic crane behind the car



- 配备电动牵引绞盘
- 器材箱内装有大功率发电机组
- 可按需求搭建各种抢险救援器材框架、托板
- 车顶配有升降照明系统
- 车后有液压起重机



YZR5130TXFJY130/G6

抢险救援消防车

Equipment fire truck

- 配备电动牵引绞盘
- 器材箱内安装有大功率发电机组
- 可按需求搭建各种抢险救援用器材框架、托板
- 车顶还配有升降照明系统
- 车后有液压起重机

主要技术参数 Main technical parameters

发动机功率 Engine power		驱动形式 Drive form	最高车速 Maximum speed	外形尺寸（mm） Dimensions	轴距 Wheelbase	总质量 Total quality	
240KW		4X2	95Km/h	9060x2510x3550	4700mm	13250kg	
吊机 Crane	最大吊重 Maximum lifting weight	最大工作幅度 Maximum working range		升降照明 Lifting lights	最大离地高度 Maximum ground clearance	主照明灯 Main light	
	5000kg	8.3m			≥8m	4X1000w	
前置绞盘 Front winch	最大拉力 Maximum pulling force	钢丝尺寸 Wire size		发电机 Generator	功率 Power	频率 Frequency	电压 Voltage
	7000kgs	11.5mmx36m			10.5KW	50HZ	220/380V

Equipped with electric traction winch

A high-power generator set is installed in the equipment box

A variety of emergency rescue equipment frames and pallets can be built as required

The roof is also equipped with a lift lighting system

There is a hydraulic crane behind the car



YZR5180GXFAP50/H6

城市主战消防车

City main battle fire truck

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
ZZ5207TXFV471GF5	MC07.34-60	251KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew	总质量 Total quality
4X2	100Km/h	4700mm	2+4	18000kg

外形尺寸(mm) Dimensions	消防泵型号 Fire pump model
8620x2510x3620	CB20.10/30.60-XZ型中低压消防泵

消防炮射程

Fire monitor range

70m (water)
40m (Class A foam)
60m (Class B foam)

消防炮额定流量 Fire monitor rated flow	消防炮型号 Fire monitor model
48L/s@1.0MPa	PL8/48型泡沫/水两用消防炮

升降照明 Lifting lights	最大离地高度 Maximum ground clearance	功率 power
	≥7.6m	4X1000w

绞盘 winch	最大拉力 Maximum pulling force	钢丝尺寸 Wire size
	7000kgs	13mmx38m

发电机 Generator	功率 Power	频率 Frequency	电压 Voltage
本田动力	10.5KW	50HZ	220/380V

罐体容积

Tank volume
Water tank 4000L
Class A foam tank 300L
Class B foam tank 700L

Integrated compressed air foam fire extinguishing system
Real-time automatic microcomputer precise control of dry foam and wet foam
Efficiently extinguish and control Class A and Class B fires with environmental protection performance
Also equipped with traction electric winch, lift lighting and on-board generator



YZR5180GXFAP50/G6A

城市主战消防车

City main battle fire truck

消防炮型号

Fire monitor model

PL8/48型泡沫/水两用消防炮（更换A类炮头即出压缩空气泡）

主要技术参数

Main technical parameters

整车型号 Vehicle model	发动机型号 Engine model	发动机功率 Engine power
ZZ5206N471GF5	MC07.33-60	240KW

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase	乘员人数 Number of crew	总质量 Total quality
4X2	100Km/h	4700mm	2+4	17800kg

外形尺寸(mm) Dimensions	消防泵型号 Fire pump model
8700x2530x3600	CB20.10/30.60-XZ型中低压消防泵

罐体容积 Tank volume	消防炮额定流量 Fire monitor rated flow
Water tank 4000L Class A foam tank 300L Class B foam tank 700L	48L/s@0.8MPa

消防炮射程

Fire monitor range

70m (water) 40m (Class A foam) 60m (Class B foam)

升降照明 Lifting lights	最大离地高度 Maximum ground clearance	功率 power
	≥7.6m	4X1000w

绞盘 winch	最大拉力 Maximum pulling force	钢丝尺寸 Wire size
	7000kgs	11.5mmx36m

发电机 Generator	功率 Power	频率 Frequency	电压 Voltage
本田动力	10.5KW	50HZ	220/380V

Integrated compressed air foam fire extinguishing system
Real-time automatic microcomputer precise control of dry foam and wet foam
Efficiently extinguish and control Class A and B fires, with environmental protection performance
Also equipped with traction electric winch, lift lighting and on-board generator



YZR5150XJSZ6 应急保障净水车

Emergency Guarantee Water Purifier

主要技术参数

Main technical parameters


底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
ZZ5186XXYN561GF1	MC07.34-60	251kw

最高车速 Maximum speed	轴距 Wheelbase	外形尺寸(mm) Dimensions
90Km/h	4500mm	9240X2540X3580

乘员人数 Number of crew	总质量 Total quality	接近角/离去角 Approach / departure angle
2+1	15000kg	16° /21°

Water purification system purification water production index			
Domestic water production water volume: 2500L/H			
Drinking water production: 1000L/H			
Purified water tank	Water storage capacity: 2000L	Material: food grade 304 stainless steel	
Lift pump	Flow: 10m ³ /H	Head: 30m	
Disc filter	Flow: 10m ³ /H	Filtration precision: 50um	
Precision filter	Material: 304 stainless steel	Accuracy: 5um	Flow: 5m ³ /H
UV sterilizer	Sterilization life: 8000 hours	Sterilization rate: 99.99%	
High-pressure pump	Material: 304 stainless steel		

整体净化系统流程

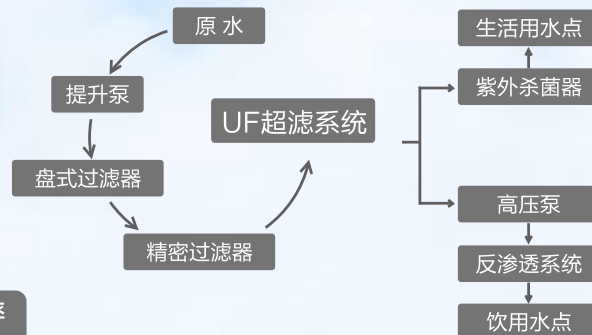

应急保障宿营车

Emergency support camper

主要技术参数

Main technical parameters

底盘型号 Chassis model	最高车速 Maximum speed	轴距 Wheelbase
QL5160XXYVRFY	105Km/h	5800mm

乘员人数 Number of crew	总质量 Total quality	外形尺寸(mm) Dimensions
3	16000Kg	10100x2500x3980

- 提供野外宿营保障，车内宿营配备齐全，水电保障系统
- 广泛适用于军队、公安特勤、消防、医疗卫生、抢险、应急救援等多种用途
- 完全满足在野外抢险救援、医疗救护、救灾、突发事件等情况下8-24人的宿营用途



Provide camping protection in the wild,
fully equipped camping in the car, water and electricity security system
Widely used in the military, public security special services, fire protection, medical and health care, emergency rescue, emergency education assistance and other purposes
Completely meet the camping use of 8-24 people in the case of field rescue, medical rescue, disaster relief, emergencies, etc.



应急保障淋浴车

Emergency shower car

主要技术参数

Main technical parameters

底盘型号 Chassis model	最高车速 Maximum speed	轴距 Wheelbase
QL5160XXYVFRY	105Km/h	5800mm

乘员人数 Number of crew	总质量 Total quality	外形尺寸(mm) Dimensions
3	16000Kg	10100x2500x3890

Shower Cart Details

The cabin area of the equipment room	4.3m ³
Shower cabin area	8.6m ³
The cabin area of the locker room	4.8m ³
Rated bath water flow	2367kg/h
Shower water temperature	38-60℃
Carry water	2000L

- 适用于部队战勤保障、消防应急救援、医疗卫生应急救援、抢险救灾后勤保障等多种用途
- 车体内部配置包括不锈钢水箱、发电机、燃气热水器、水净化设备、真空抽吸设备、淋浴设施
- 可同时满足8人洗浴，提供100人左右洗浴、淋浴及生活用水

Suitable for military support, fire emergency rescue, medical and health emergency rescue, emergency rescue and disaster logistics support, etc.

The interior configuration of the car body includes stainless steel water tank, generator, gas water heater, water purification equipment, vacuum suction equipment, shower facilities

It can satisfy 8 people for bathing at the same time, and provide about 100 people with bath, shower and domestic water



应急保障炊事车

Emergency support cooking car

主要技术参数

Main technical parameters

底盘型号 Chassis model	最高车速 Maximum speed	轴距 Wheelbase
QL5160XXYVFRY	105Km/h	5800mm

乘员人数 Number of crew	总质量 Total quality	外形尺寸(mm) Dimensions
3	16000Kg	10100x2500x3890

- 餐饮车专用于提供野外餐饮保障，提高野外执行任务的保障能力
- 广泛用于军队、公安特勤、消防、医疗卫生、抢险、应急救援等多种用途
- 车内配置齐全，完全满足野外100-300人的餐饮保障



The catering truck is specially used to provide outdoor catering guarantee and improve the guarantee ability of performing tasks in the wild. Widely used in military, public security special service, fire protection, medical and health care, emergency rescue, emergency rescue and other purposes.

The interior of the car is fully equipped, which can fully meet the food and beverage protection of 100-300 people in the wild.



消防宣传车

Fire propaganda vehicle

主要技术参数

Main technical parameters

底盘型号 Chassis model	最高车速 Maximum speed	轴距 Wheelbase
ZZ1251N464GE1	101Km/h	4350+1350mm

乘员人数 Number of crew	总质量 Total quality	外形尺寸(mm) Dimensions
3	16500Kg	11200X2550X3960

Display	Specification P4
Vehicle equipment	power 15kw
Main fire display system	simulated alarm system simulated fire extinguishing system simulated building linkage system



YZR5320GXFFJX110/C6

机场消防车

Airport fire truck

主要技术参数

Main technical parameters

底盘型号 Chassis model	发动机型号 Engine model	发动机功率 Engine power
Arocs3358 6X6	奔驰OM473	425Kw

驱动形式 Drive form	最高车速 Maximum speed	轴距 Wheelbase
6X6	105Km/h	5100+1350mm

乘员人数 Number of crew	总质量 Total quality	接近角/离去角 Approach / departure angle
2	32000kg	30° / 25°

外形尺寸(mm) Dimensions	罐体容积 Tank volume	消防泵型号 Fire pump model
10360x2540x3740	水9500L 泡沫1500L	CRQC消防泵

- 配备进口CRQC型消防泵
- 配备独立康明斯发动机驱动消防泵
- 车辆采用智能控制系统，可进行消防系统及独立发动机动力系统的操控
- 消防操作简洁，安全可靠
- 驾驶室内实现一键式操作，自动化程度高
- 泵房设有应急手动操作系统

Equipped with imported CRQC fire pump
Equipped with independent Cummins engine-driven fire pump

The vehicle adopts an intelligent control system, which can control the fire protection system and the independent engine power system

Simple, safe and reliable fire fighting operation
One-button operation is realized in the cab, with a high degree of automation. There is an emergency manual operating system in the pump room



Roof fire monitor

Control method	handle control + gun position display, wireless remote control
Rated flow	80L/s, with half flow function
Range	≥85m (water) ≥80m (foam)
Horizontal rotation angle	±175°
Tilt angle	-45° -75°

Front fire secondary gun

Control method	electronic control (wireless control)
Rated flow	20L/s
Range	≥55m
Horizontal rotation angle	350°
Tilt angle	-45° -90°