





5 years
warranty

Features:

- Integrated 120-277V photosensor optional.
- Die-cast aluminum housing is good for heat dissipation.
- ETL approved for wet locations.
- Surface mounts to standard junction box.
- Instant energy savings and potential rebate eligibility.
- No RF interference, No IR/UV radiation ,no mercury pollution.
- Long 50,000 hour rated life.
- Minimizes replacements and labor costs.
- Robust design protects the LEDs to withstand harsh outdoor environments.
- Easy installation and retrofit application



Die Casting Aluminum
Heat Sink ADC12



SMD 2835 LED



LED driver, high reliable,
offer 5 years warranty

Specifications:



Model	RMS-L2118-30W
Power	30W
Luminous Flux	3600lm
Luminous Efficacy	120lm/w
Light Source	Epistar LED
Operation Temp	-40°C to +45°C
CTT	5000K
CRI	>80
Life Span	50,000 hours
Voltage	100-277VAC/50-60HZ
Beam Angle	120°
PT	>0.95
Warranty	5 Years





Dimension:

Unit: mm

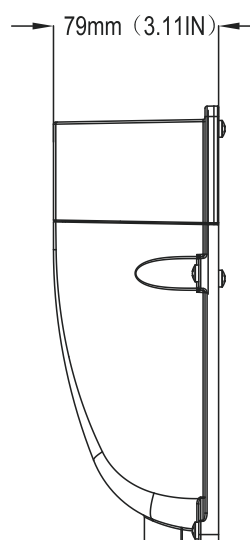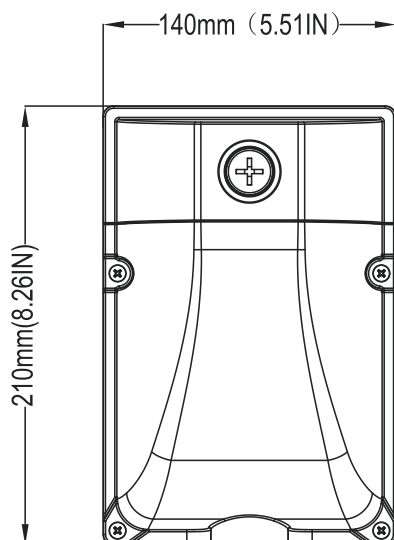

Application:

- Site Lighting
- Security Lighting
- Pathways
- Entrances
- Perimeters

