


## Product Features

- International standard AC voltage input. (277~480V<sub>AC</sub>)
- Power B has a 12V independent power
- Dimming controls: 1-10Vdc,  
Power B complies with the UL8750 standard
- Up to 88% efficiency
- Active power factor correction
- Protections: Short circuit protection and open circuit protection.
- Lightning Surge Protection: L-N: 4kV, L/N-PE: 6kV.
- 5 years warranty

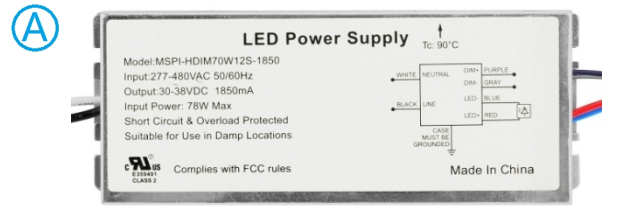

## Description

The MSPI-HDIM70W12S-XXXX series input voltage ranges from 277 to 480 VAC, which has the advantages of high efficiency, reliability, long service life and so on. All aspects of protection, including short circuit protection and open circuit protection, ensure the accessible operation of this product.

## Model List

Model	Output current	Input Voltage Range (1)	Output Voltage Range	Max. Output Power	Power Factor (2)	Efficiency (2)
MSPI-HDIM70W12S-1850	1850mA	277~480Vac	30~38Vdc	70.3W	0.97	91%
MSPI-HDIM70W12S-1700	1700mA	277~480Vac	30~38Vdc	64.6W	0.96	89%
MSPI-HDIM70W12S-1600	1600mA	277~480Vac	30~38Vdc	60.8W	0.94	89%
MSPI-HDIM70W12S-1500	1500mA	277~480Vac	30~38Vdc	57W	0.97	89%

Note: 1. UL and FCC Certified input voltage range: 277 ~ 480Vac

2. Default tested at 347Vac, full load, Ta 25°C

## Input Specifications

Parameter	Min	Typ.	Max	Remarks
AC input range	277Vac	-	480Vac	
Input frequency range	47Hz	-	63Hz	
Leakage Current	-	-	1.38mA	L, N-PE @1960Vac.
Input AC Current	-	-	0.32A	277Vac, 100% full load.
Power Factor	0.9	-	0.99	277~480Vac, 75%~100% full load.
THD	-	-	20%	277~480Vac, 75%~100% full load.

## Output Specifications

Parameter		Min	Typ.	Max	Remarks
Output current tolerance		-3% lo	-	+3% lo	
No-load Output Voltage	Io=1850mA	-	-	48Vdc	
	Io=1700mA	-	-	48Vdc	
	Io=1600mA	-	-	48Vdc	
	Io=1500mA	-	-	48Vdc	
Start-up current overshoot		-	No	-	
Line Regulation		-	±2%	-	
Load Regulation		-	±3%	-	
Start-up time			500ms	600ms	347Vac, 75% ~ 100% full load.
		-	400ms	500ms	480Vac, 75% ~ 100% full load.
Ⓑ 12V output voltage		11.2V	12 V	12.8 V	
Ⓑ 12V output current		-	-	40mA	

Note: All performance parameters are typical values measured at ambient temperature of 25 °C, unless otherwise specified.

## General Specifications

Parameter		Min	Typ.	Max	Remarks
Efficiency at 277Vac	Io=1850mA	90%	90.5%	-	It is measured at ambient temperature 25 °C, 100% load.
	Io=1700mA	88.5%	88.8%	-	
	Io=1600mA	88.3%	88.6%	-	
	Io=1500mA	88.1%	88.5%	-	
Efficiency at 347Vac	Io=1850mA	90.5%	91%	-	It is measured at ambient temperature 25 °C, 100% load.
	Io=1700mA	88.7%	89%	-	
	Io=1600mA	88.5%	88.8%	-	
	Io=1500mA	88.2%	88.6%	-	
Efficiency at 380Vac	Io=1850mA	91.5%	92%	-	It is measured at ambient temperature 25 °C, 100% load.
	Io=1700mA	90%	90.5%	-	
	Io=1600mA	90%	90.5%	-	
	Io=1500mA	88%	89%	-	
Efficiency at 480Vac	Io=1850mA	90%	90.5%	-	It is measured at ambient temperature 25 °C, 100% load.
	Io=1700mA	88.6%	89%	-	
	Io=1600mA	88.5%	89%	-	
	Io=1500mA	88.3%	88.7%	-	

Parameter	Min	Typ.	Max	Remarks
No-load power consumption	-	-	0.74W	480Vac / 60Hz
Lifespan	-	50,000 Hours	-	Case Temperature 75°C , 100% full load.
Operating Case Temperature for Safety Tc_s	-40°C	-	+90°C	
Operating Case Temperature for Warranty Tc_w	-30°C	-	+75°C	Humidity: 10%RH to 90%RH. No condensation.
Storage Temperature	-40°C	-	+85°C	
Dimensions (mm)	A:L155×W59.8×H32 B:L158×W64×H39			
Net Weight	-	A:490g B:570g	-	

### Dimming Specifications


Parameter	Min	Typ.	Max	Remarks
Maximum voltage on line 1~10V	0V	-	15V	
Current on 1~10V Line	0μA	200μA	250μA	
Dimming Output Range	10%Iomax	-	100%Iomax	
Recommended Dimming Input Range	1V	-	10V	

### Safety & EMC Compliance


Safety Category	Standard
UL/CUL	UL 8750, Class 2.
EMI Standards	Remarks
CISPR15	Conducted Emission Test & Radiated Emission Test.
FCC Part 15	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: The power supply meets the EMI standard, but as the power supply is a part of the lamp system, EMI related confirmation shall be conducted in combination with the lamp (terminal equipment).


### Performance Curves

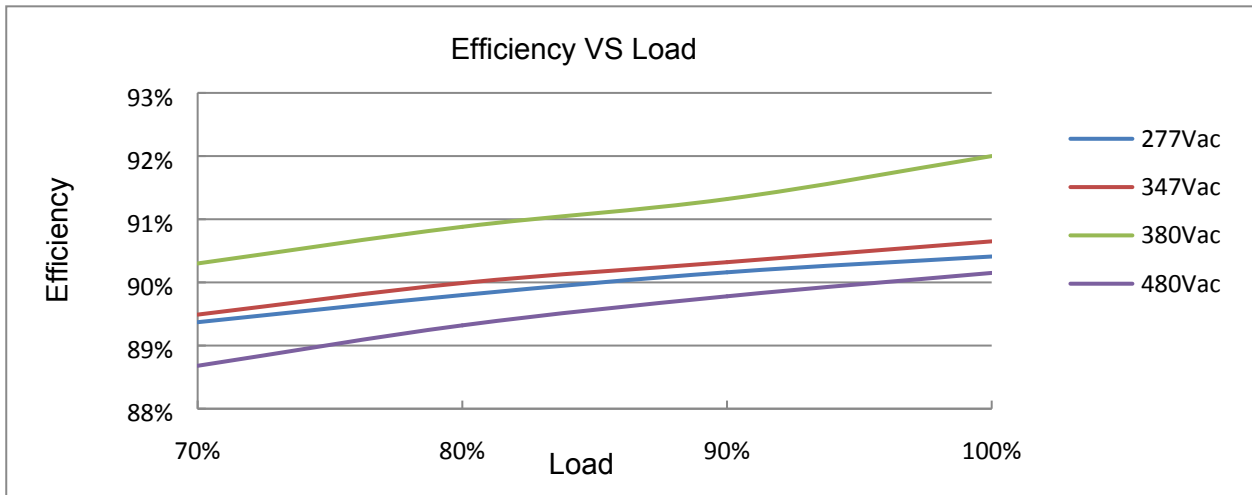

### Power Factor Curves

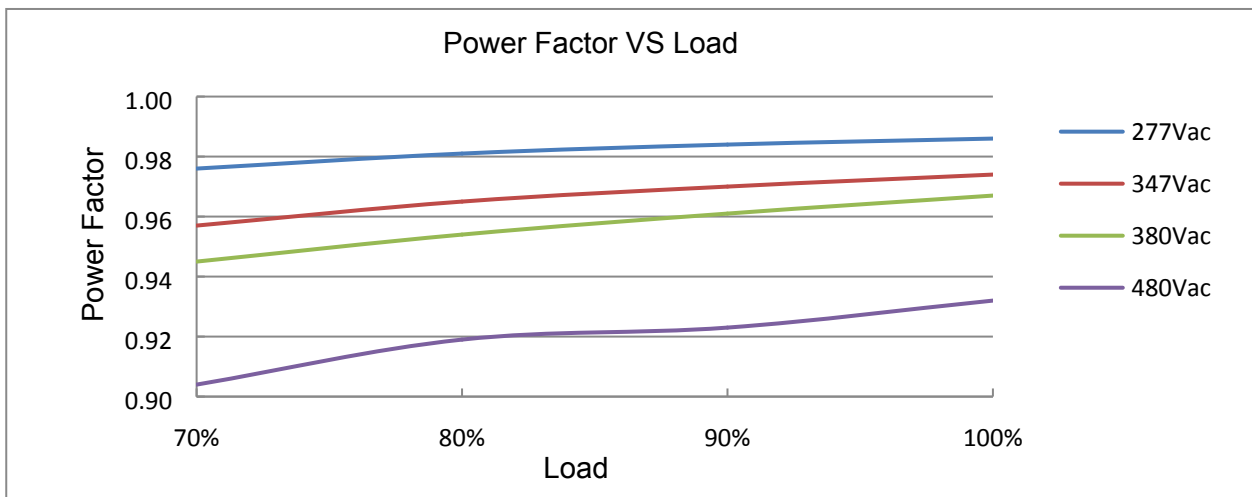


### Total Harmonic Distortion Curves

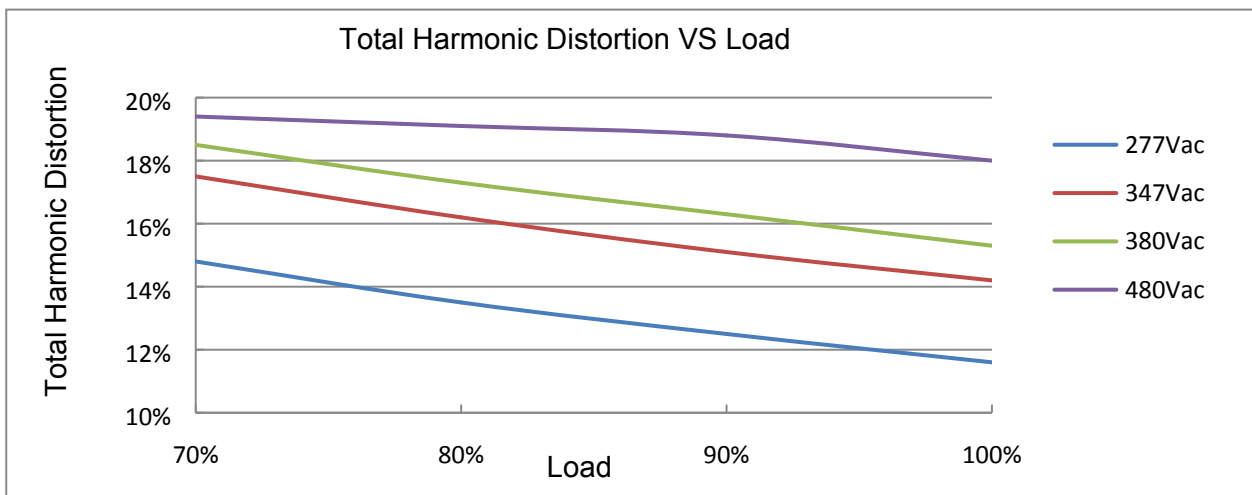


Note: The above data is derived from the MSPI-HDIM70W12S-1850 test.


**Mechanical Dimensions (Unit: mm)**

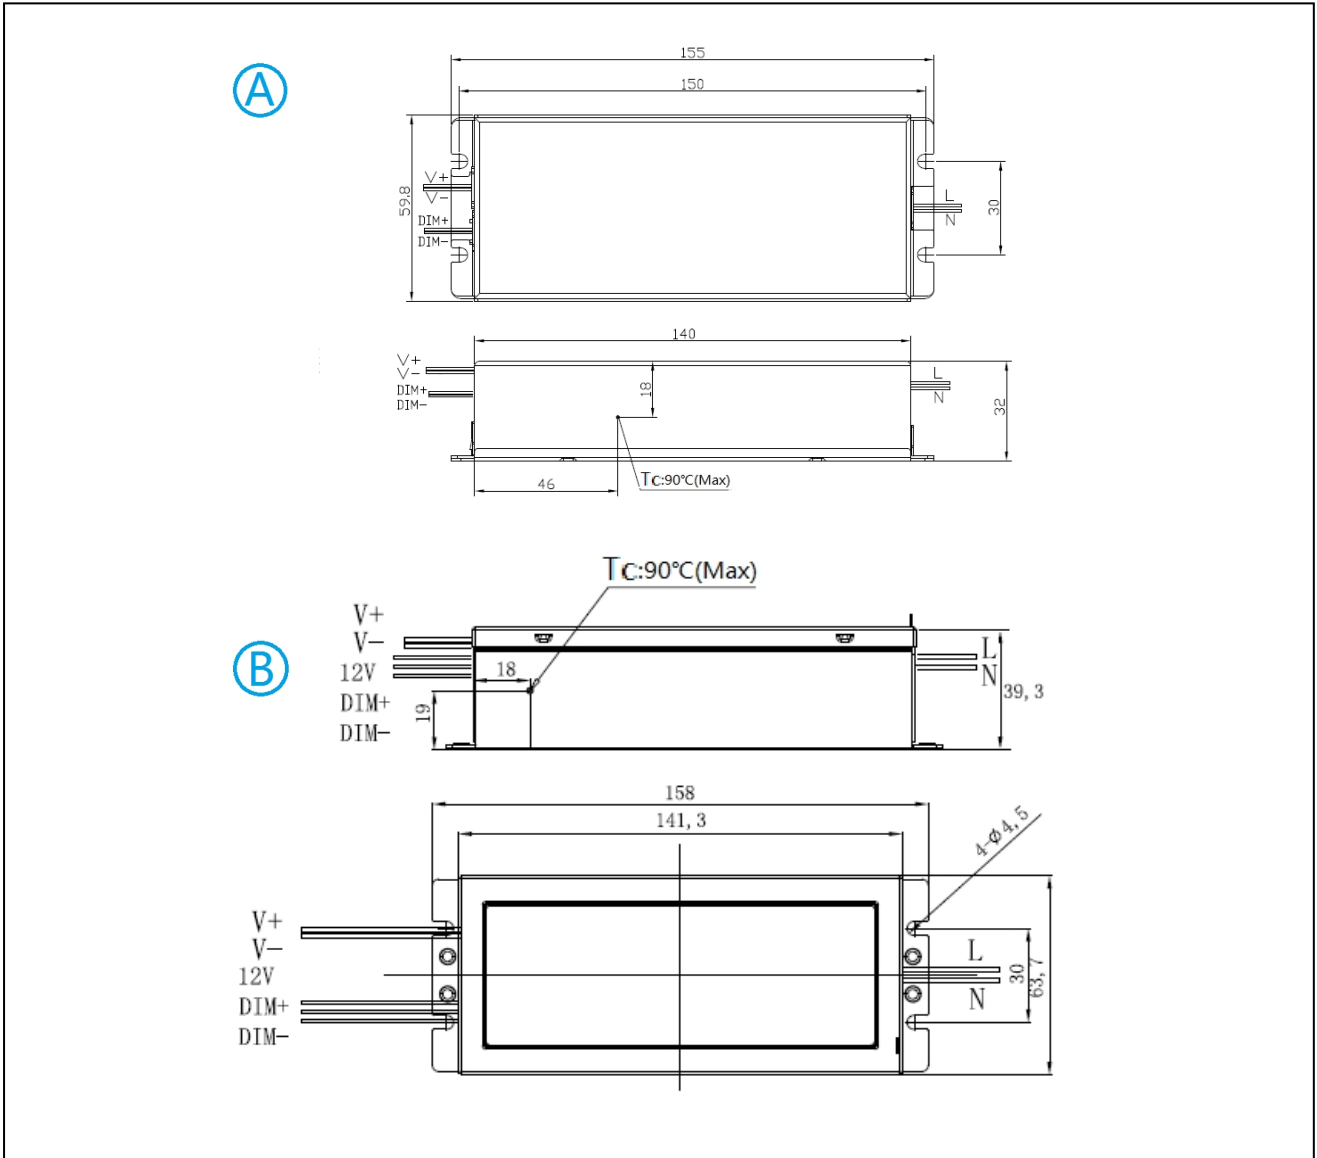

**Life curve**

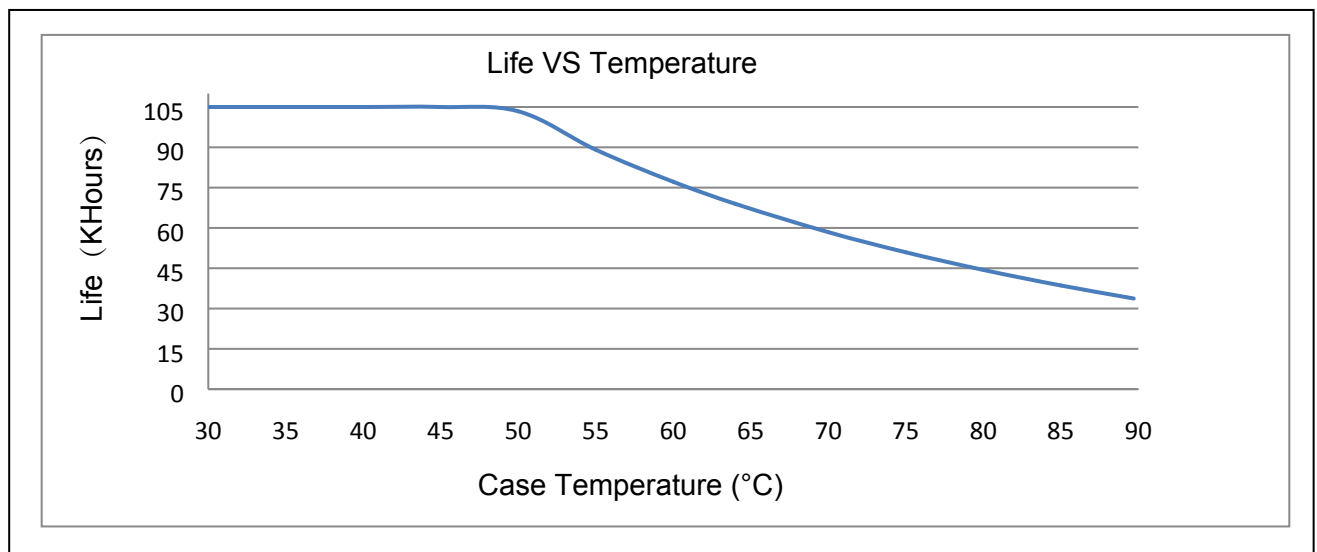

### Recommended Mounting Direction

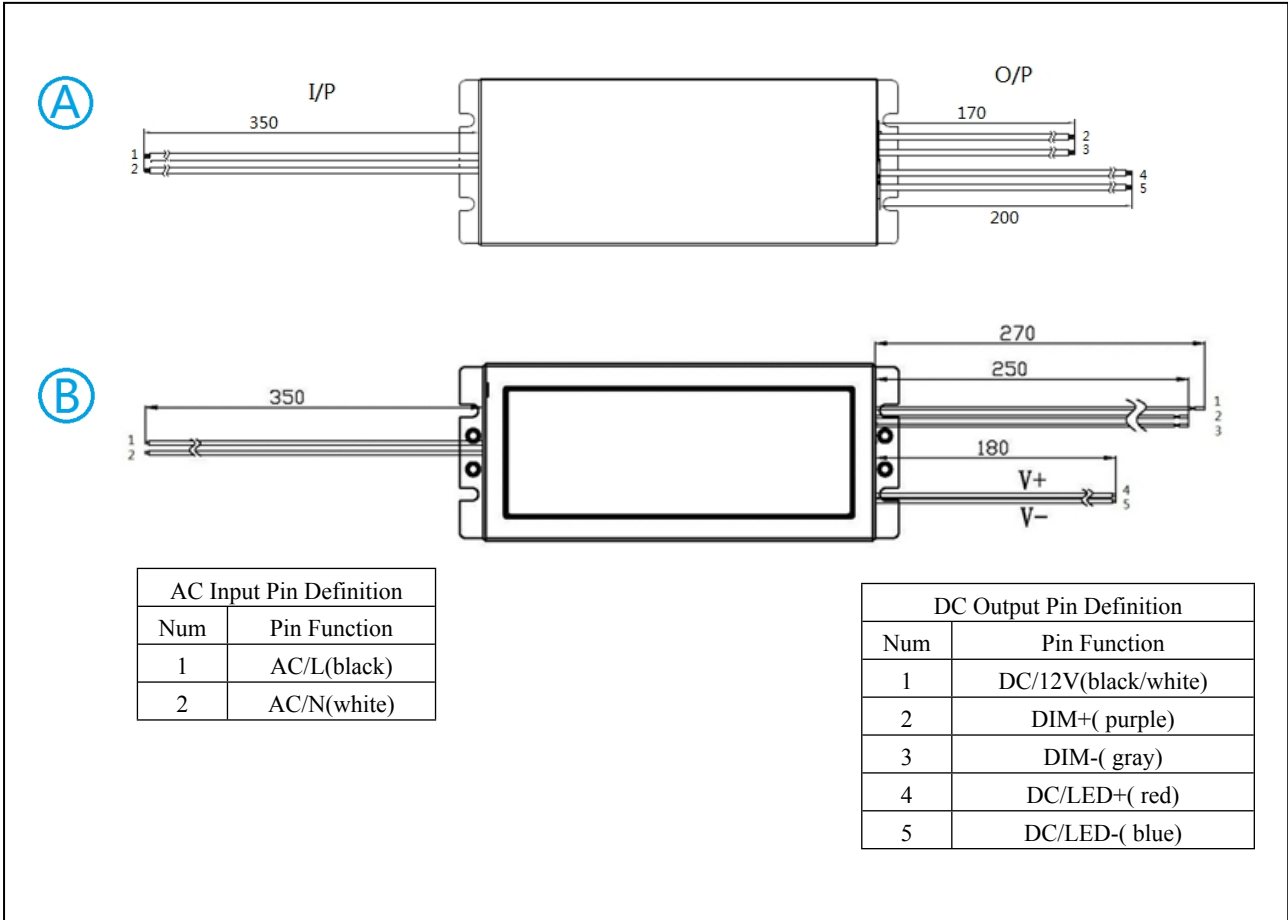

### Block diagram

