

LED Selectable Vapor Tight Light

Wattages: (2FT)20W/25W/30W;(4FT)34W/38W/45W;(8FT)65W/75W/90W



8'
FIXTURE

4'
FIXTURE

2'
FIXTURE

The LED Selectable Vapor Tight Light provides gasketed enclosure which provides dust-free and moisture-free fixture. The Vapor Tight Series can be widely used for food processing plants, meat lockers, beverage coolers, car washes, and parking structures.



FEATURES

- Made of high quality ABS material, high ignition point, more safe.
- With PC lens.
- Lampshade-inner surface stripe design make the light diffusion angle greater and the light more uniform.
- 0-10V dimming.
- 12Vdc auxiliary dimming
- Motion sensor control available (Optional)

WATT/CCT
FIELD-ADJUSTABLE

Simply select desired CCT and Wattage before installation









| SPECIFICATION | | | |
|----------------------------|-----------------------------|-----------------------------|-------------------------------|
| TYPE | WSD-VP2FT202530W27-3545K-G | WSD-VP4FT343845W27-3545K-G | WSD-VP8FT657590W27-3545K-G |
| WATTAGE | (2FT) 20W/25W/30W | (4FT) 34W/38W/45W | (8FT) 65W/75W/90W |
| LUMEN | 2872 Lm / 3454 Lm / 4021 Lm | 4941 lm / 5423 lm / 6494 lm | 9295 lm / 10500 lm / 12364 lm |
| EFFICACY | ≥ 135 lm/W | | |
| CCT | 3500K/4000K/5000K | | |
| CRI | 80 | | |
| INPUT VOLTAGE | AC120-277V | | |
| LIGHT ANGLE | 115° | | |
| POWER FACTOR | 0.95 | | |
| DRIVER EFFICACY | 90% | | |
| FACTORY SETTINGS | 30W & 4000K | 45W & 4000K | 90W & 4000K |
| WORKING TEMPERATURE | -40°F ~ 104°F | | |
| LIFESPAN (L70) | 100000 hours | | |
| PROTECTION LEVEL | Wet locations | | |
| CABLE | None | | |
| WARRANTY | 5 year limited | | |

LED Selectable Vapor Tight Light

Wattages: (2FT)20W/25W/30W;(4FT)34W/38W/45W;(8FT)65W/75W/90W

DIMENSION

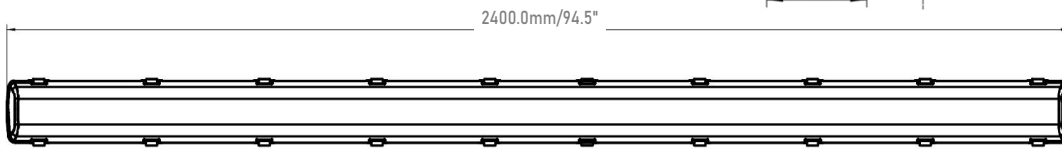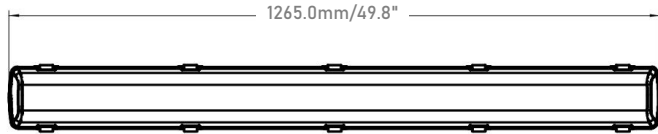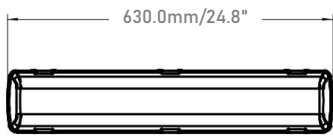

2' FIXTURE

| | |
|-------------------|---------------------------|
| WATTAGE | 20W/25W/30W |
| NET WEIGHT | 1.54KG(3.40lbs) |
| BOX DIM. | 26.5"x5.3"x3.6"(1pcs/CTN) |
| | 27.1"x11.0"x 8"(4pcs/CTN) |

4' FIXTURE

| | |
|-------------------|---------------------------|
| WATTAGE | 34W/38W/45W |
| NET WEIGHT | 2.66KG(5.86lbs) |
| BOX DIM. | 51.4"x5.3"x3.6"(1pcs/CTN) |
| | 51.9"x11.3"x8" (4pcs/CTN) |

8' FIXTURE

| | |
|-------------------|---------------------------|
| WATTAGE | 65W/75W/90W |
| NET WEIGHT | 5.10KG(11.24lbs) |
| BOX DIM. | 95.8"x5.3"x3.6"(1pcs/CTN) |
| | 96.8"x10.9"x8" (4pcs/CTN) |

EMERGENCY BACK-UP (SOLD SEPARATELY)



WSD-EMS8W27-XX
8W Emergency Backup Battery LED Driver

WSD-EMS15W27-XX
15W Emergency Backup Battery LED Driver

WSD-EMS20W27-XX
20W Emergency Backup Battery

CONTROL (SOLD SEPARATELY)



ANT-3C
Microwave Motion Sensor



RC-100
Microwave Sensor Remote Controller

INSTALLING ACCESSORIES (STANDARD)



V-HOOK / BRACKET / SCREW / PLASTIC TUBE / WATERPROOF PLUG

INSTALLING ACCESSORIES (SOLD SEPARATELY)



WSD-VPTK1.38X1.97inch
Vapor Tight Lights Pendant Kit
(Only applicable to screw hoisting)



THE CHAIN
LENGTH:(41.34 inch)

LED Selectable Vapor Tight Light

Wattages: (2FT)20W/25W/30W;(4FT)34W/38W/45W;(8FT)65W/75W/90W

ORDERING INFORMATION

EXAMPLE:


WSD-VP2FT202530W27-3545K-Z[W,G]-E[Blank,M]

| WSD | VP | 2FT | 202530W | 27 | 3545K | Z | E |
|----------------------|------------------|--|--|-----------------|--------------------------------|---------------------------|-------------------|
| PRODUCT | PRODUCT | SIZE | WATTAGE | VOLTAGE | CCT | FINISH | CONTROL |
| WSD (WSD LED INC) | VP (Vapor Tight) | 2FT (2-feet) 4FT (4-feet) 8FT (8-feet) | 202530W - (20W/25W/30W) 343845W - (34W/38W/45W) 657590W - (65W/75W/90W) | 27 - (120-277V) | 3545K - (3500K/4000K/5000K) | W - (White) G - (Gray) | M (Motion Sensor) |


PHOTOMETRICS

For complete IES files, please visit our website.

WSD-VP2FT202530W27-3545K (30W&3500K)

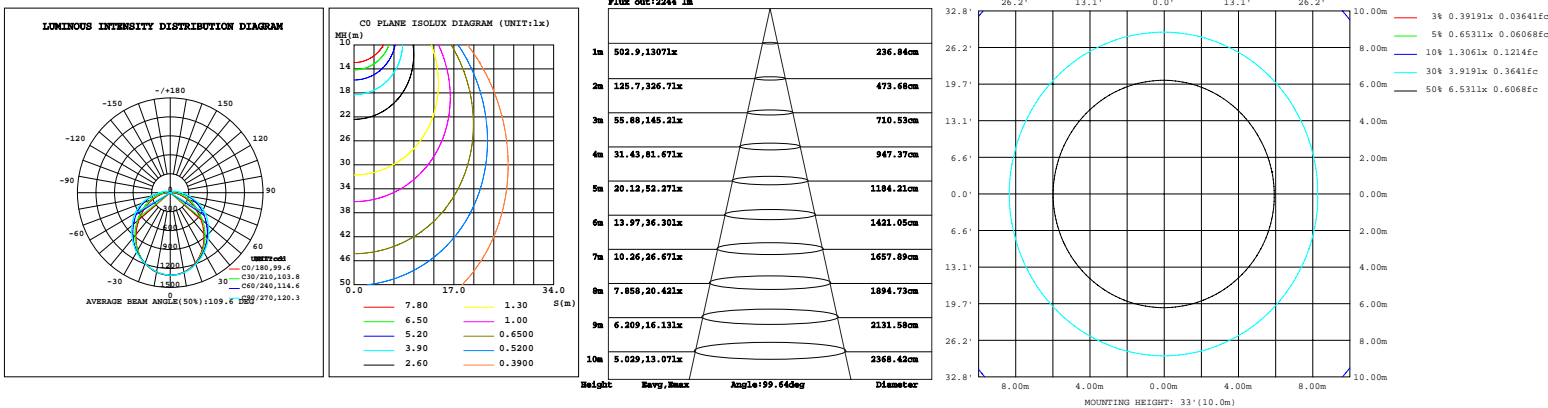

WSD-VP4FT343845W27-3545K (45W&3500K)

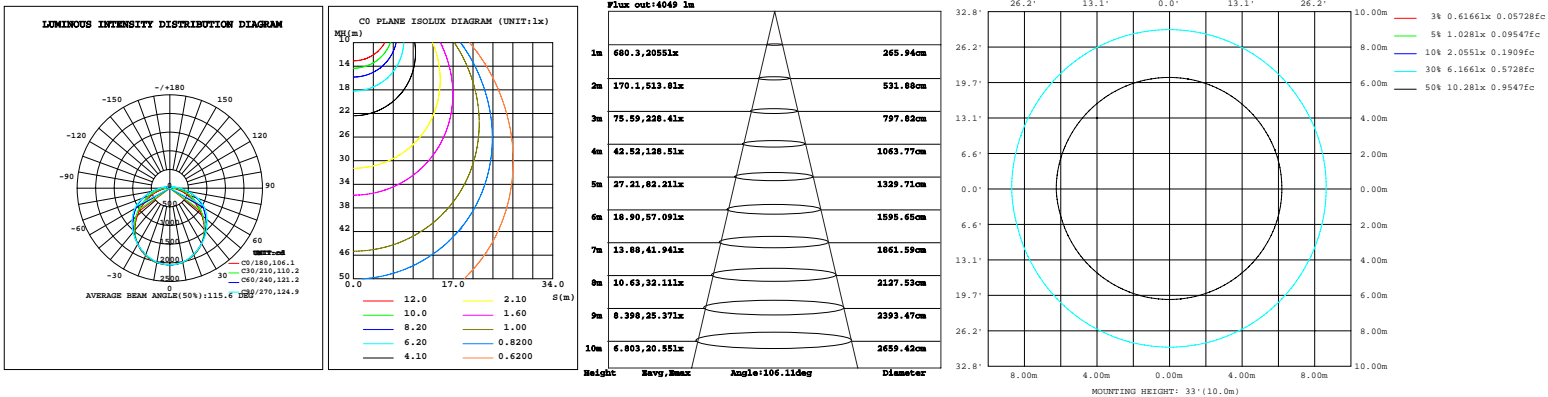

LED Selectable Vapor Tight Light

Wattages: (2FT)20W/25W/30W;(4FT)34W/38W/45W;(8FT)65W/75W/90W

PHOTOMETRICS

For complete IES files, please visit our website.

WSD-VP8FT657590W27-3545K (90W&3500K)

