
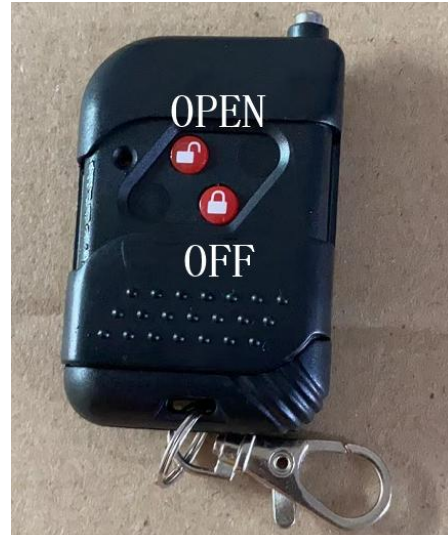


T-800 mist manual operating instructions

I. LCD menu introduction

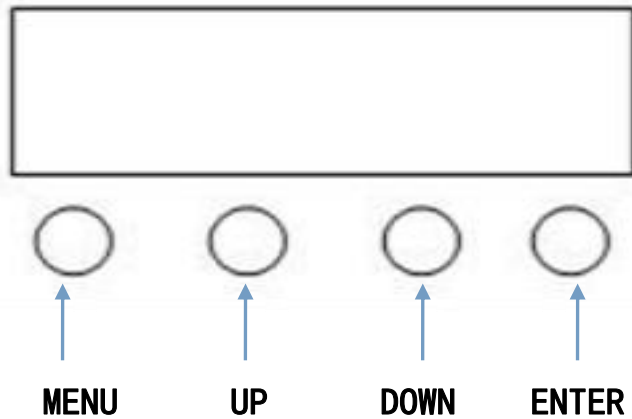

II. Operating Instructions for turning on the machine:

1. After the power is turned on and the machine is turned on, the LCD displays the default address code (current address code);
2. Machine heating: The four indicator lights in the lower right corner of the LCD menu are flashing;
3. The machine completes heating: Four indicator lights stop beating and the machine is in standby state;
4. In the state of no DMX signal, pressing the ENTER key once is manual continuous spraying of mist; Pressing the ENTER key again is to stop spraying of mist;
5. Press ENTER about 3 seconds, and the LCD will ENTER the actual temperature interface; Press ENTER about 3 seconds, and the LCD will return to the main menu. If there is no operation menu button, the LCD page will automatically return to the main menu after about 60 seconds.

III. Description:

001-512	Set up DMX address code	Note: long pressing the UP key can increase the number rapidly, while long pressing the DOWN key can decrease the number rapidly.
P001-100	Set up Liquid quantity	
F001-100	Set up Wind speed	

IV. 2CH channel Instruction:

channel	Description	Instruction
1	Spray fog	0 OFF 1-255 Control the amount of cigarettes
2	Fan	0 Low speed 1-255 Control fan

V. Wireless remote control description:

Press the OPEN key to spray mist

Press the OFF key to stop spraying mist