

Specifications

Controller With Four Network Ports TS962

V1.5 2018. SEP


Overview:

TS962 is a controller with 4 network ports, which supports full/double/single color LED screen. It supports up to 2.6 million pixels, realizes auto-adjusting brightness by external brightness sensor and cascade function.

Features :


- 1) One DVI video signal input; One HDMI video signal input;
- 2) One DVI video signal loop out; One HDMI video signal loop out;
- 3) Supports fetching back RCG file;
- 4) Supports broadcasting RCG file;
- 5) Supports broadcasting CON file;
- 6) One Audio signal input;
- 7) With four network output ports, supports common video source, like 2560x1024,1920x1200,2048x1152;
- 8) With LCD display panel, supports adjusting brightness by rotary button;
- 9) Supports auto-adjusting brightness (requires light sensor).
- 10) Quick setup without PC;
- 11) Supports cascade function.

Appearance : _____

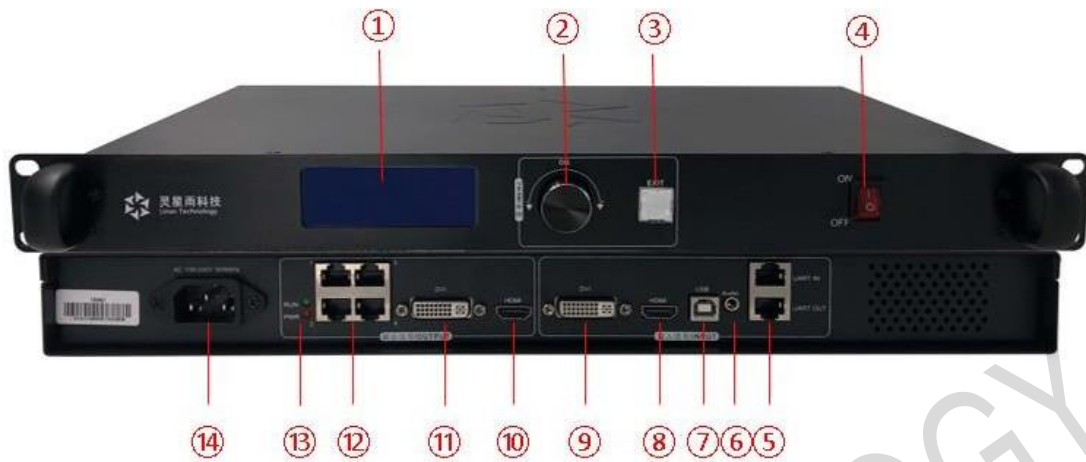

Interface introduction	
①	LCD display panel
②	Rotate to select; press down to confirm the selection
③	Menu/return button
④	Power button/ indicator
⑤	UART-IN: cascade input; UART-OUT: cascade output
⑥	3.5mm audio input
⑦	USB connector for setup
⑧	HDMI signal input
⑨	DVI signal input
⑩	HDMI signal loop out
⑪	DVI signal loop out

⑫	4 gigabit network ports
⑬	Indicator: red for power; green for signal
⑭	Power input: AC100~240V

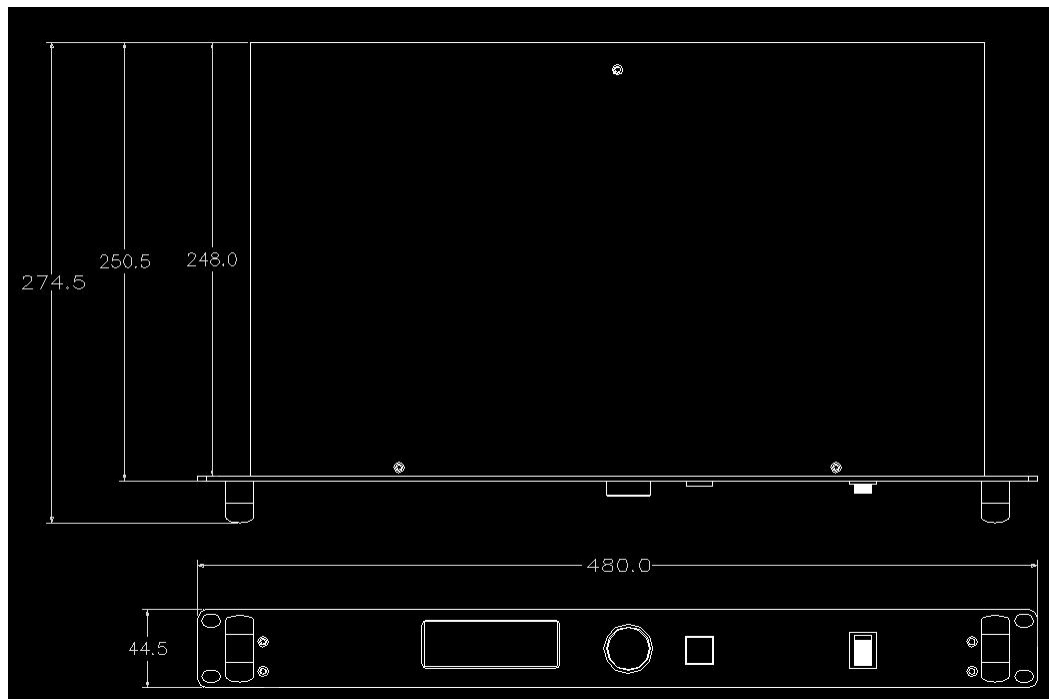Dimensions :

Working Conditions :

Power Consumption (W)	20
Working Temperature (°C)	-20°C ~ 75°C
Working Humidity (%)	0% ~ 95%
Weight (KG)	3
Dimensions	1U

END