


Item Number: A02231

WARNING (To reduce the risk of fire, electric shock, or injury to persons):


1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the **"OFF"** position. B). Place the wall switch in the **"OFF"** position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4" larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before fixture.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **60W** per bulb.
7. Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
8. When replacing bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

IMAGE FOR FINISHED PRODUCT:

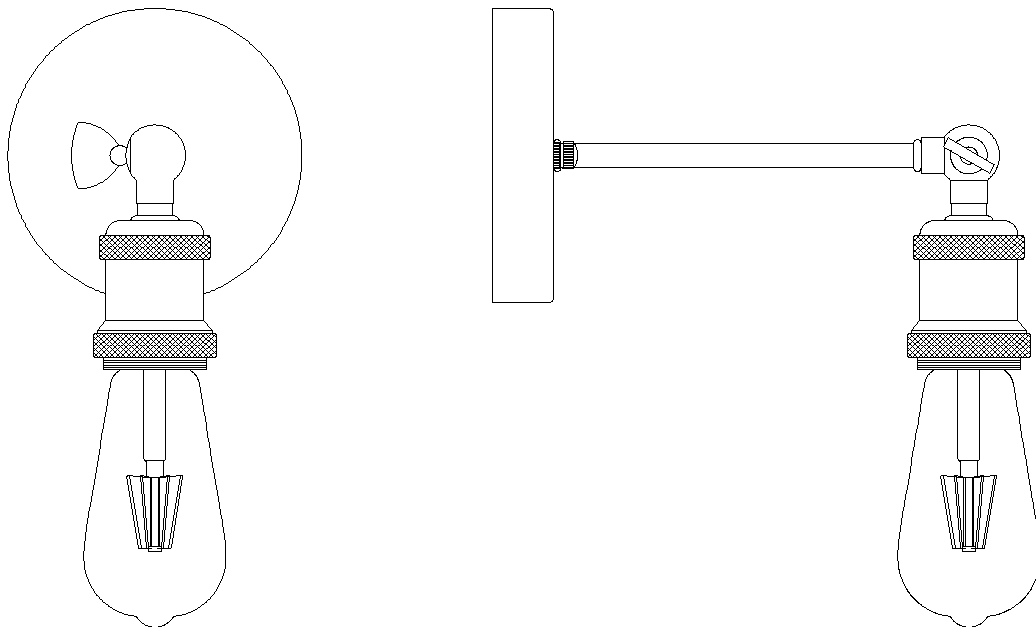


TOOLS REQUIRED (NOT INCLUDED):

Before doing assembly and installation please prepare the needed tools as below picture

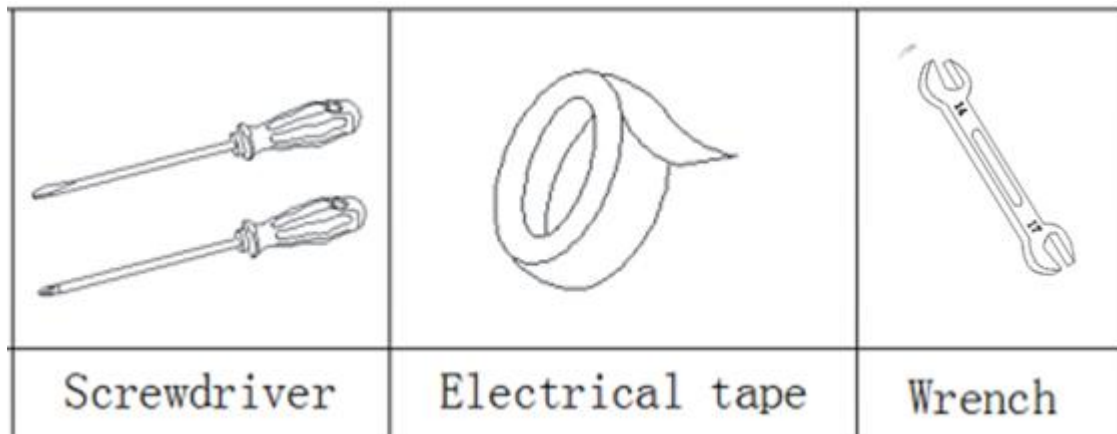

PARTS TYPE & QTY INCLUDING:

- (A) Mounting plate (1)
- (C) Hex nut (1)
- (D) Stem (1)
- (E) Joint (1)
- (F) Socket cap (1)
- (G) Green ground screw (1)
- (I) Washer (1)
- (J) Back plate (1)
- (K) Ball nut (2)

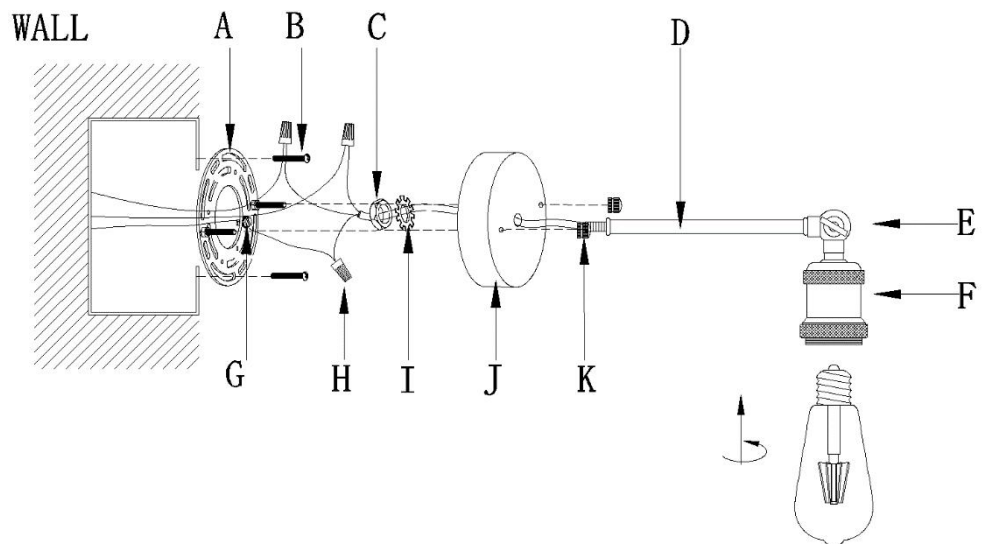


ACCESSORIES & QTY ENCLOSED:

- (B) Mounting screw (2)
- (H) Plastic Wire Connectors (3)


ASSEMBLY & INSTALLATION INSTRUCTIONS:

1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration
2. **Turn off power**
 Before you start to make installation, NEVER attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position. B). Place the wall switch in the "OFF" position.
3. **Make fixture assembly**
 - 1) Unscrew ball nut(L) and then gently remove mounting plate(A) from the back plate (K)
 - 2) Uncrew the hex nut (C) from stem (E)
 Remove the hex nut(D) , washer (J)from stem (E)

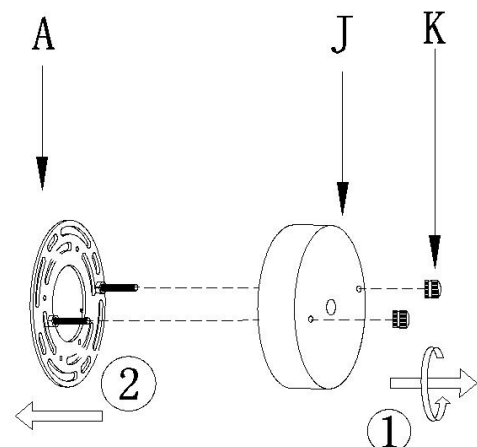




- 3) Uncrew the hex nut (C) from stem (D) and
Remove the washer (I) from stem (D)

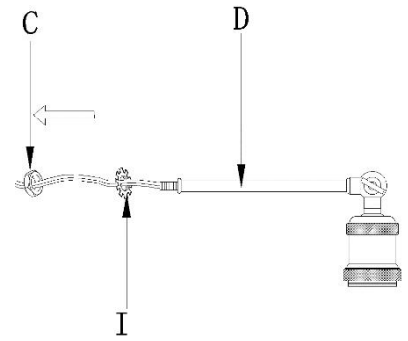


- 4) Carefully pass the wires through the backplate and
push the threaded end of stem (D) into the backplate (J).
And the other side of backplate (J), put the washer (I)
and the hex nut (C) over the wires of stem (E), then gently
tighten hex nut (C) till tight to secure the stem (D) in place

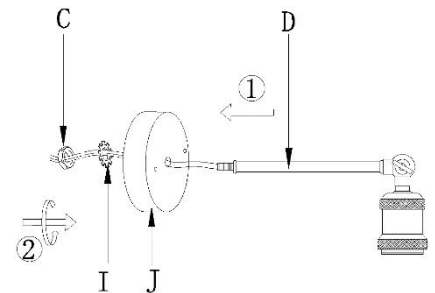

4. Make fixture installation

- 1) Pass all wires from outlet box through mounting plate assembly (A)
Attach the mounting plate assembly (A) to outlet box with mounting
screws (B), the side of mounting plate assembly (A) marked "GND"
must face out.

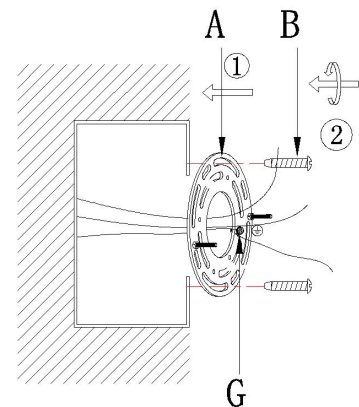


- 2) Make wire connections

Connect wires as below wires connecting shown. **TAKE NOTE OF YOUR WIRE COLOR OF FIXTURE , NEVER CONNECT
WIRE TO GROUND WIRE**


Connect ground wire according to below chart

Connect wires according to below chart

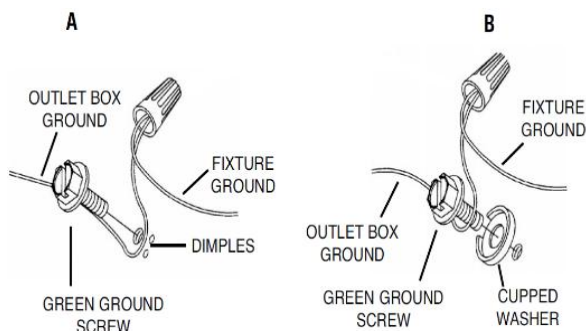

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.)




Twist plastic wire connector until wires are tightly joined together, wrap each connector with approved electrical tape and carefully tuck all wires into the outlet box


- 3)** Push back plate (K) to wall, carefully passing mounting screws through holes in back plate (K), tighten ball nut (L) to secure back plate (K) in place

Note: The backplate (E) should be snug against the ceiling and the mounting balls. If not, adjust the length of the nipples on the mounting plate assembly (A) by unscrewing the preassembled hex nuts and then screwing the mounting screws in or out of the mounting plate until the length is achieved. Tighten the hex nuts and proceed to step "3"

WALL

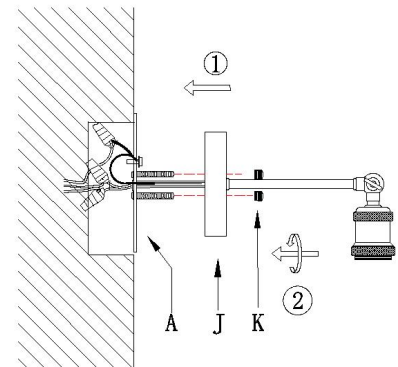

WALL

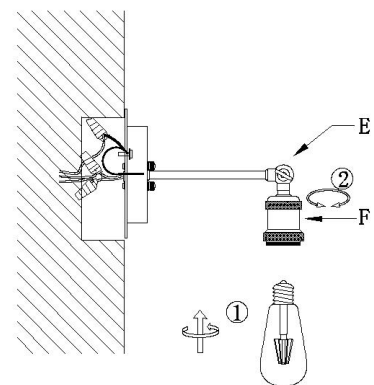

- 4)** Install bulb (Not included. Please do not exceed the maximum capacity recommended on the socket.)
Loosen the stud on joint (E) to adjust the angle of fixture, once desired angle of fixture is achieved, tighten the stud.

5. Check everything already is installed properly, then you could turn on the light. Enjoy !

CLEANING

To clean, wipe fixture with a soft cloth. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

ORDERING PARTS

Keep this sheet for future reference, and in case you need to order replacement parts. All parts for this fixture can be ordered from place of purchase. Be sure to use exact wording from illustration when ordering parts.