


**Item Number: A03490**

**WARNING** (To reduce the risk of fire, electric shock, or injury to persons):

1. We suggest installation by a **licensed electrician**.
2. Please read the instruction carefully and save it as you may need it at later time.
3. Before you start, **NEVER** attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "**OFF**" position. B). Place the wall switch in the "**OFF**" position.
4. Mounting surface should be clean, dry, flat, strong enough and 1/4" larger than the canopy on all side. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
5. Make sure that the ceiling or wall can stand the weight of the lamp before fixture.
6. Make sure the voltage you are using is **120V**. The maximum wattage is **40W** per bulb.
7. Keep the lamp away from acidic and basic objects in case of damaging the surface of the lamp.
8. When replacing bulb, you should turn off or unplug the lamp and you must wait until it is cool as bulbs get hot quickly.
9. The safety instructions appearing in this manual are not meant to cover all possible conditions that may occur. It must be understood that common sense, caution and care must be used with any electrical products.

**IMAGE FOR FINISHED PRODUCT:**

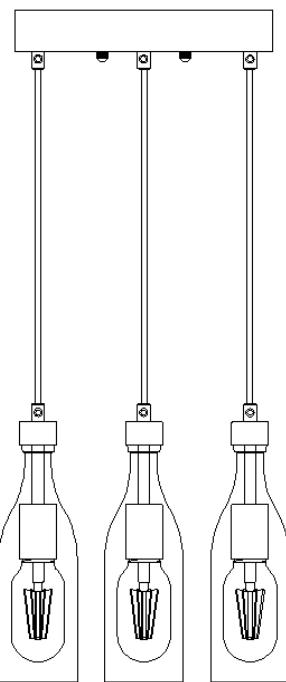



#### TOOLS REQUIRED (NOT INCLUDED):

Before doing assembly and installation please prepare the needed tools as below picture


|        |                                       |                 |                  |        |
|--------|---------------------------------------|-----------------|------------------|--------|
|        |                                       |                 |                  |        |
| Ladder | Phillips head, flat blade screwdriver | Electrical tape | Portable driller | Hammer |

#### PARTS TYPE & QTY INCLUDING:

- (A) Mounting plate assembly (1)
- (B) Green ground screw (1)
- (E) Canopy (1)
- (F) Strain relief (6)
- (G) Ball knob (2)
- (H) Cord (3)
- (I) Glass shade (3)


#### ACCESSORIES & QTY ENCLOSED:

- (C) Plastic Wire Connector (3)
- (D) Mounting screw (2)
- (J) Allen wrench (1)

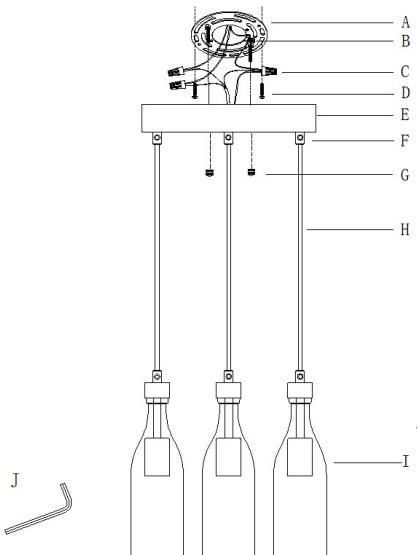

#### ASSEMBLY & INSTALLATION INSTRUCTIONS:

1. Carefully remove the fixture from the carton and check that all parts and accessories are included as shown in the above illustration
2. Turn off power  
Before you start to make installation, NEVER attempt any work without shutting off the electricity until the work is done. A). Go to the main fuse, or circuit breaker, box in your home. Place the main power switch in the "OFF" position. B). Place the wall switch in the "OFF" position.
3. Make installation

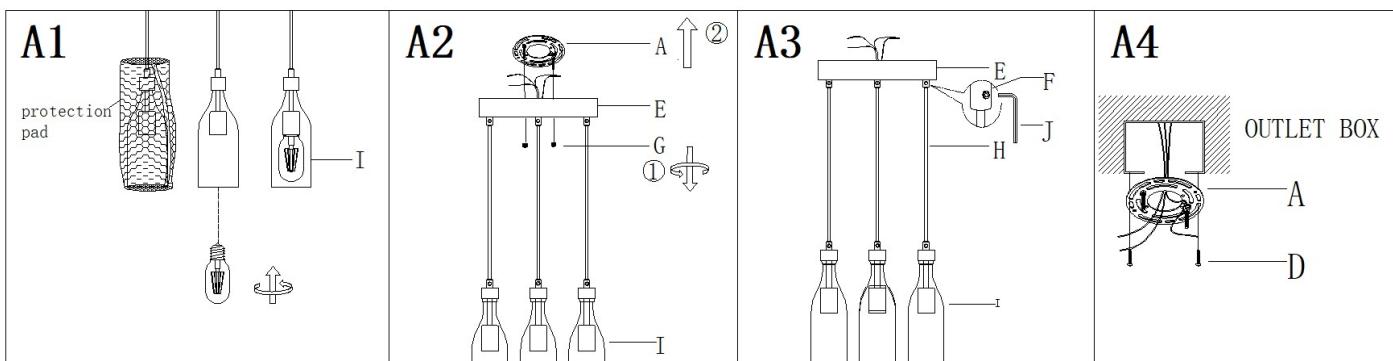




**STEP A1:** Carefully remove the protection pads from glass shades (I), then install bulbs (Not included. Please do not exceed the maximum capacity recommended on the socket.)

**STEP A2:** Unscrew the ball knobs (G) from the canopy (E), then gently remove the mounting plate (A) from the canopy (E)

**STEP A3:** Adjust the length of the cords (H) to achieve the desired height of the mounted fixture.

1. Use the allen wrench(J) to unscrew the screw in the strain relief(F), carefully pull cord(H) up or down to lengthen or shorten the cord.
2. Once desired height of fixture is achieved, carefully tighten the screw.


**STEP A4:** Attach the mounting plate (A) to outlet box with mounting screws (D).

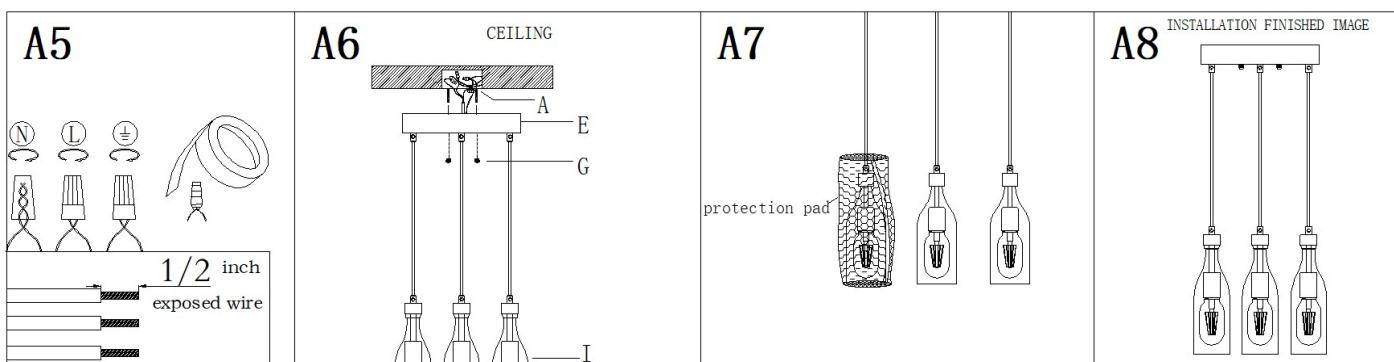

#### STEP A5. Make wire connections

Connect wires as below wires connecting shown. **TAKE NOTE OF YOUR COLOR OF FIXTURE ,NEVER CONNECT WIRES TO GROUND WIRES**


**Connect ground wire according to below chart**

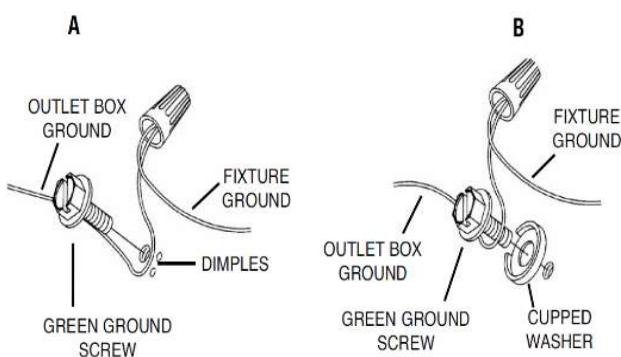

**Connect wires according to below chart**

| Connect Black or Red Supply Wire to:                    | Connect White Supply Wire to:                           |
|---|---|
| Black   | White   |
| *Parallel cord (round & smooth)                         | *Parallel cord (square & ridged)                        |
| Clear, Brown, Gold or Black without tracer              | Clear, Brown, Gold or Black with tracer                 |
| Insulated wire (other than green) with copper conductor | Insulated wire (other than green) with silver conductor |

\*Note: When parallel wires (SPT I & SPT II) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (see illus.).



Twist plastic wire connector until wires are tightly joined together, wrap each connector with approved electrical tape and carefully stuff all wires into the outlet box and the canopy(E)

**STEP A6:** Align the holes in the canopy (E) with the mounting screws, then attach the canopy (I) using the previously removed ball knobs (G). Hand tighten until snug.

**Before this step, in order to avoid damage by swing or bumping while hanging the pendant fixture.our recommend to trap the glass shades(M) with protection pads.**

**STEP A7:** Carefully remove the protection pads from Glass shades (I)

**STEP A8:** Check everything installed properly, then you could turn on the light. Enjoy!

#### CLEANING

To clean, wipe fixture with a soft cloth. Clean glass with a mild soap. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper.

#### ORDERING PARTS

Keep this sheet for future reference, and in case you need to order replacement parts. All parts for this fixture can be ordered from place of purchase. Be sure to use exact wording from illustration when ordering parts.