

F00091 Cabinet

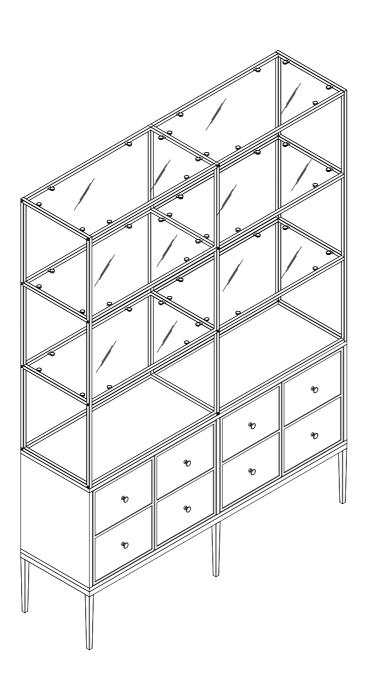

PART LIST

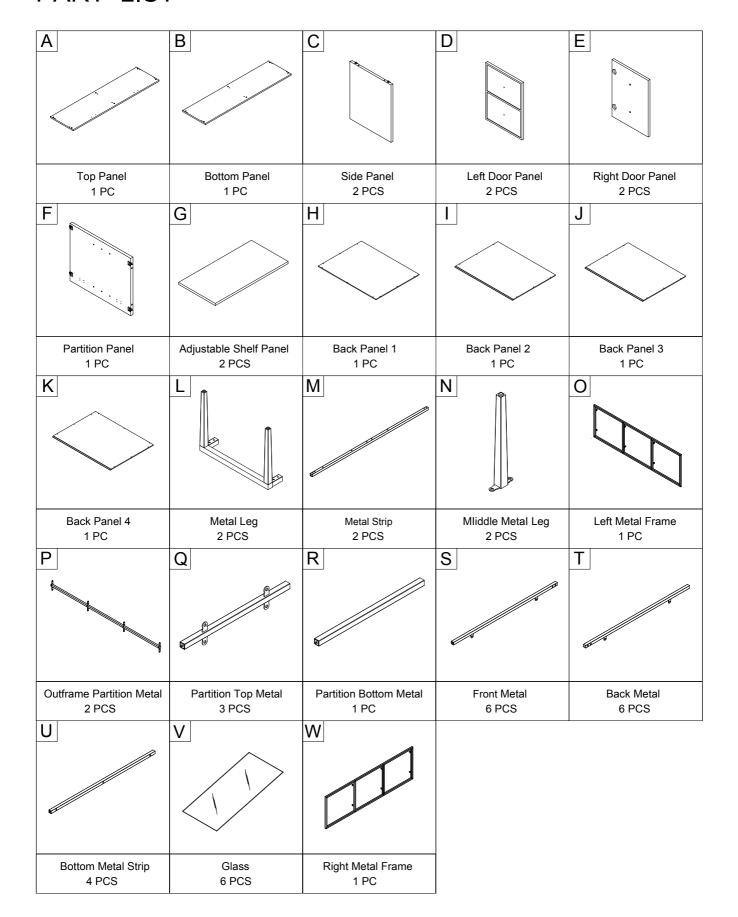

HARDWARE LIST


1	2	3	4	5
ф 1/4"*3/8"	ф 1/4"*1-1/4"	Ф 8*30mm		ф 3*12mm
Short Bolt	Long Bolt	Wood Dowel	Hinge	Hinge Screw
30 PCS (Extra 1)	24 PCS (Extra 1)	12 PCS (Extra 1)	8 PCS	48 PCS (Extra 1)
6	7	8	9	10
	ф 5/32"*3/4"		ф 3*16mm	ф 3*16mm
Knob	Round Head Bolt	Magnet Latch	Latch Screw	Round Head Screw
8 PCS	8 PCS	2 PCS	4 PCS	30 PCS (Extra 2)
11	12	13	14	
			ф 1/4"*1"	
Allen Wrench	Shelf Holder	Suction Cup	Bolt	
1 PC	8 PCS (Extra 1)	48 PCS (Extra 2)	12 PCS (Extra 1)	


ADDITIONAL TOOLS (Not Provided)


Note: It is not recommended to use power tools during assembly.





Phillips Head Screwdriver

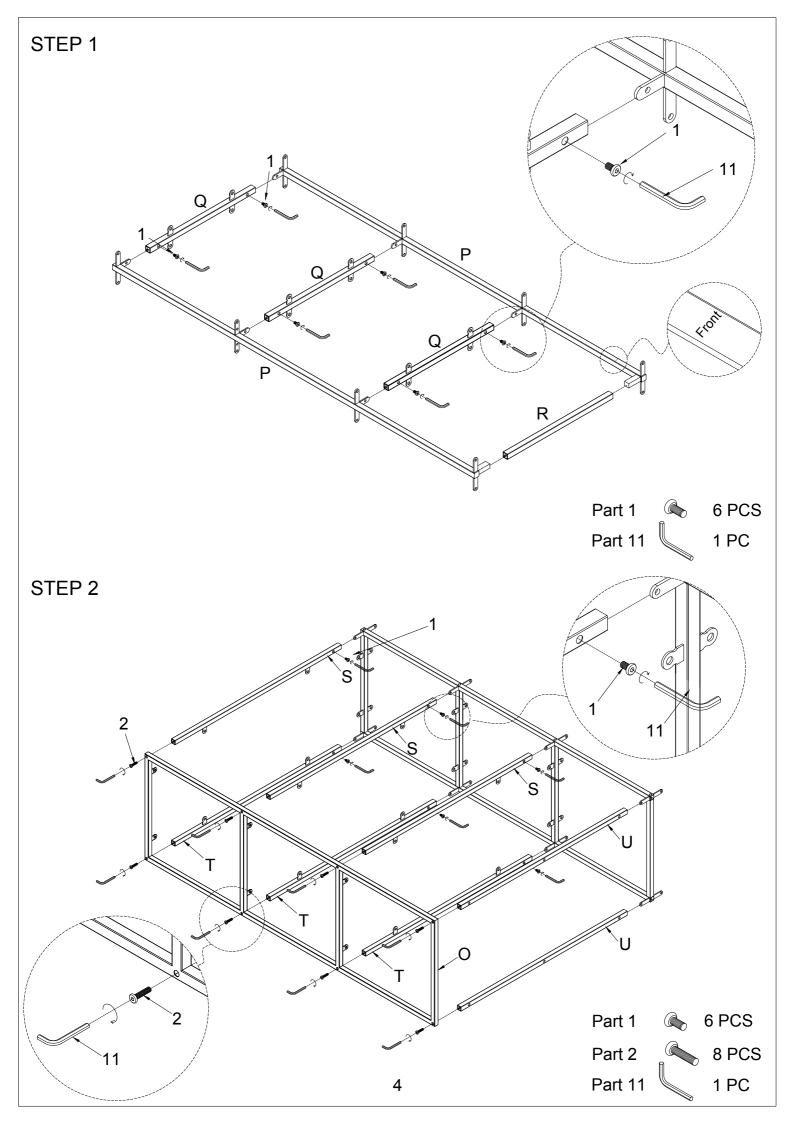


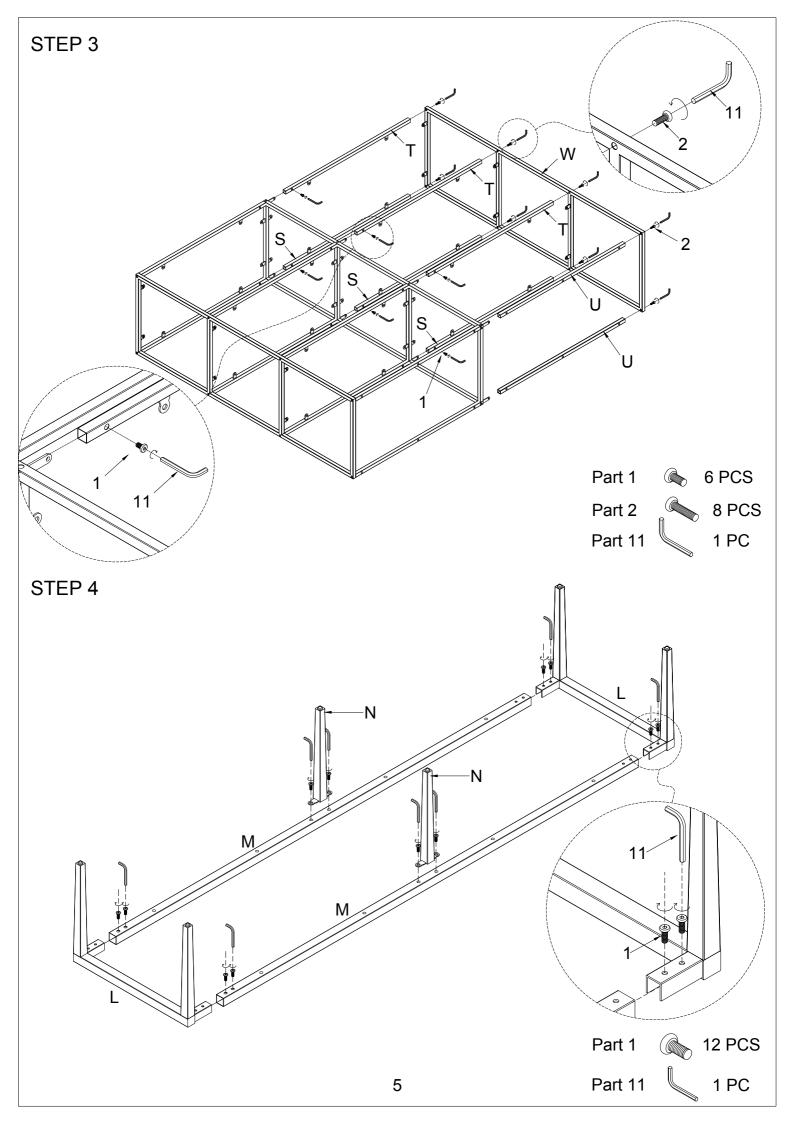

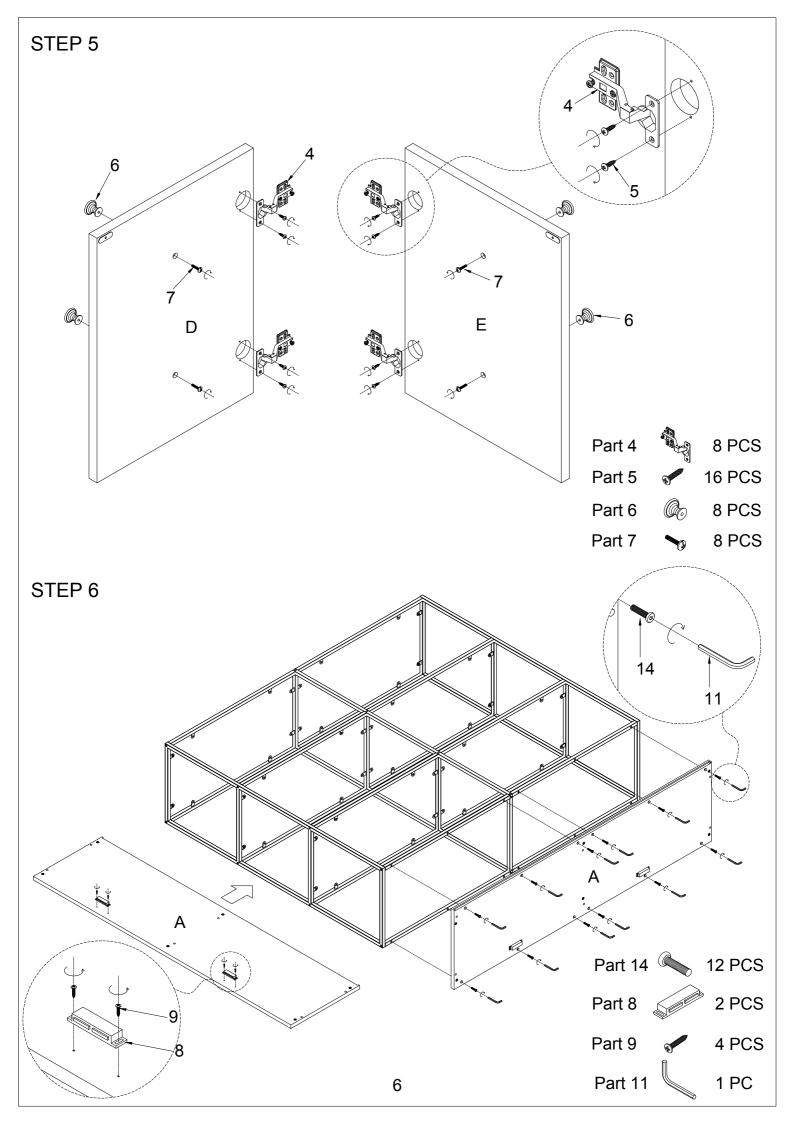

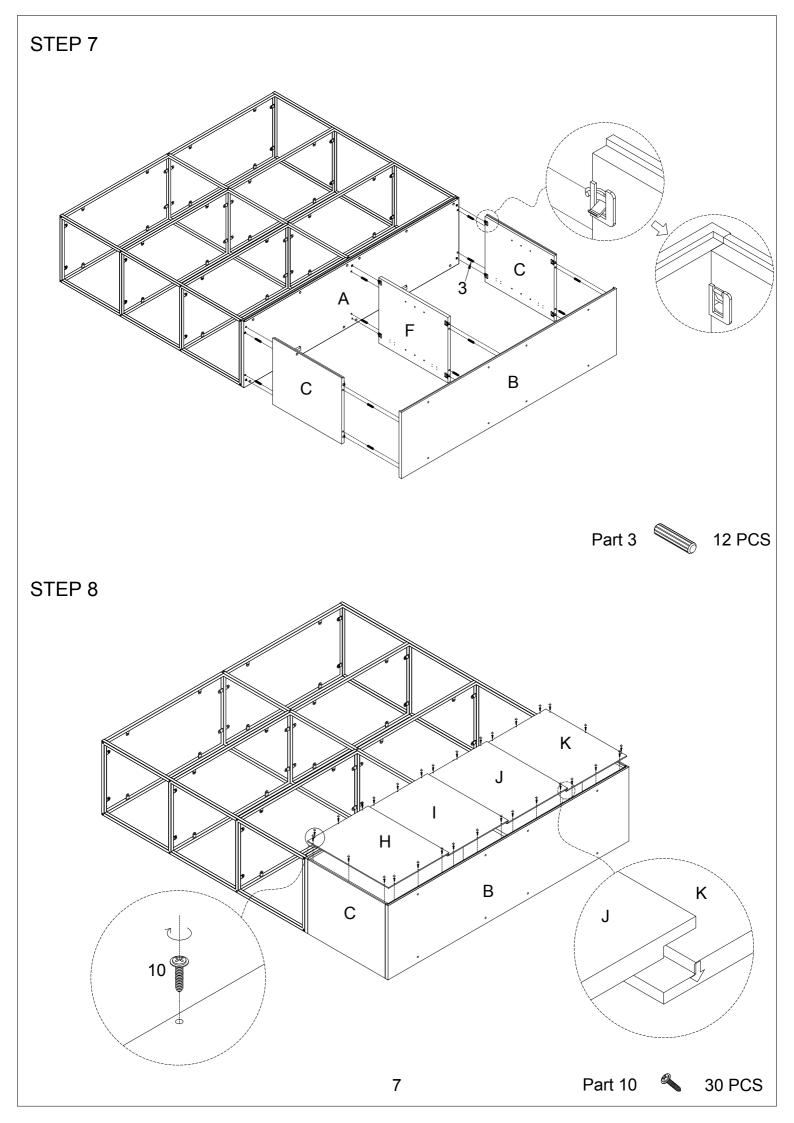

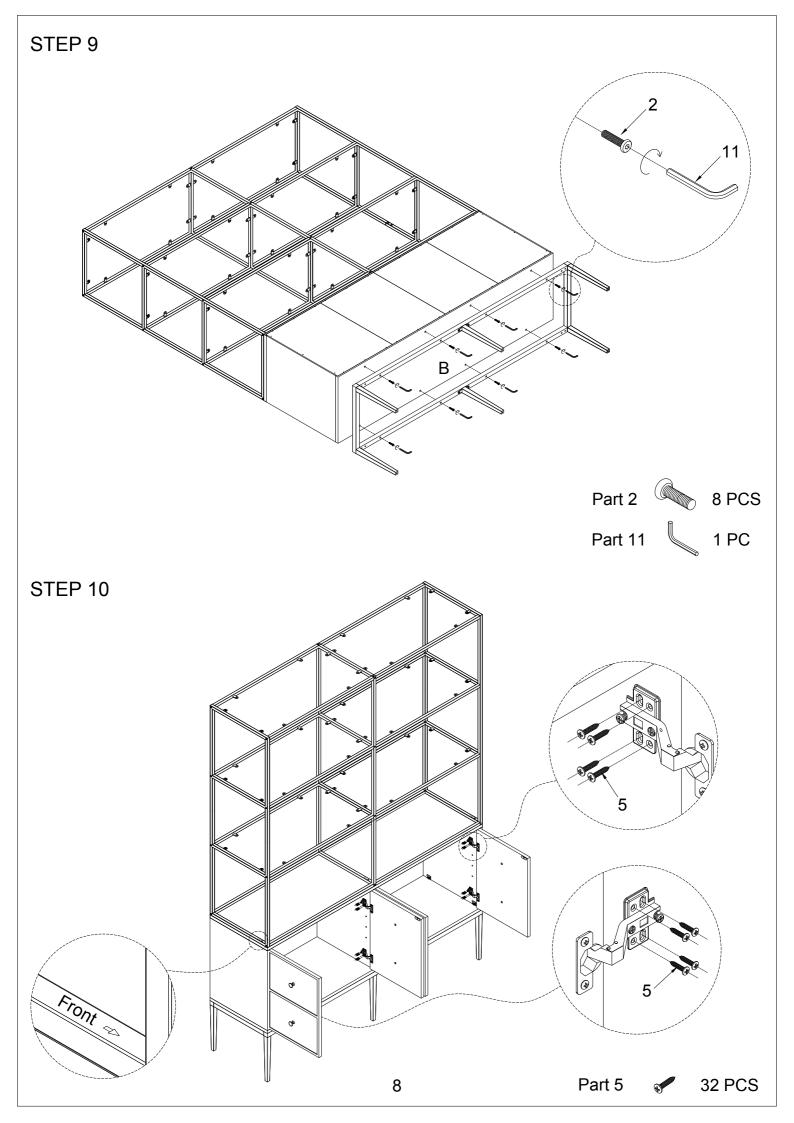

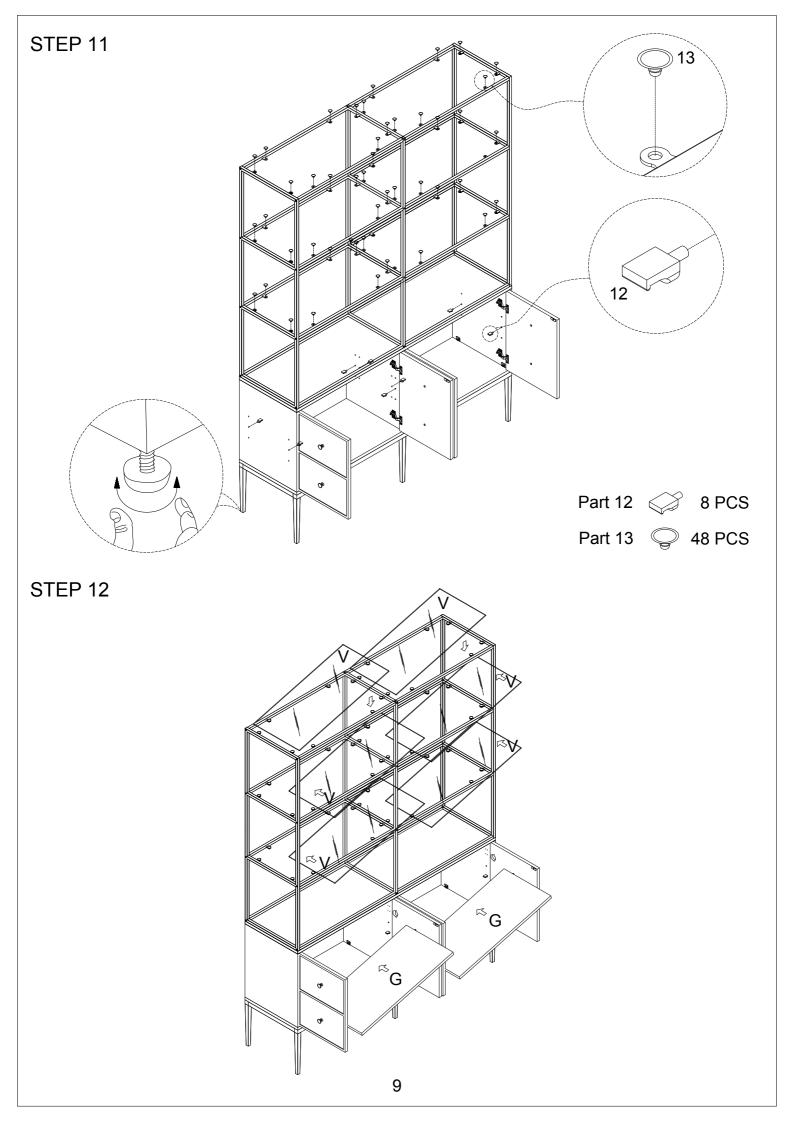


#A	#B	#C	#D	#E
		Cana		
1-1/2"xØ4xD8		5/8"xØ3xD8		
Long Screw 1 PC	Wall Anchor 1 PC	Short Screw 1 PC	Safety Wall Strap 1 PC	Flat Washer 2 PCS

SAFETY WALL STRAP INSTALLATION

Note: It is highly recommended to install this safety strap kit to prevent tipping, damage and/or injury.


- 1. Insert short screw (C) through flat washer (E) and safety wall strap (D) and then fix them to panel (part A) using phillips head screwdriver.
- 2. Drill a 11/32" hole where you want to secure the unit. The drilled hole will be at the same height as the hole in top panel (part A) where safety wall strap (D) is attached. Tap wall anchor (B) into the hole.
- 3. Insert long screw (A) through flat washer (E) and safety wall strap (D) into wall anchor (B) using phillips head screwdriver.

Note: This item is not intended for clothing storage use.

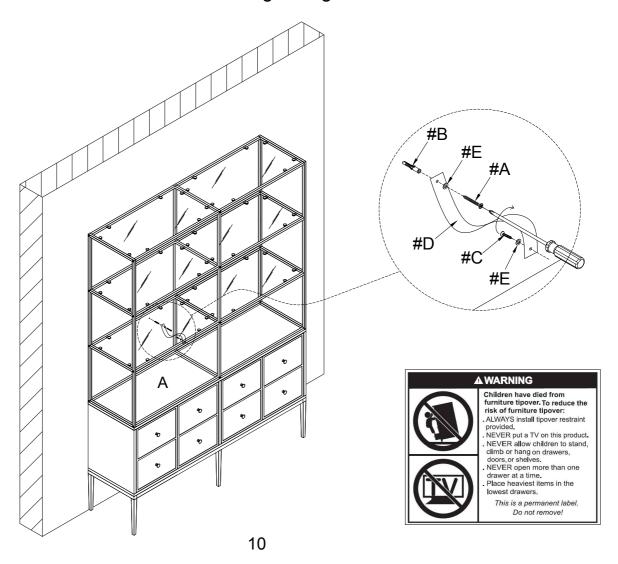


ADJUST YOUR DOORS TO MAKE THE GAPS MORE EVEN (OPTIONAL).

STEP 1 Open the door




STEP 2 Adjust the gap between door panel and side panel




Loosen the screw indicated a little, adjust the hinge to right position (see step 2a & 2b), then tighten the screw.

STEP 2a MOVE DOOR IN




Push the hinge back a little.

STEP 2b MOVE DOOR OUT




Pull the hinge forward a little.

STEP 3 To adjust the gap between two door




Loosen or tighten the screw indicated a little to adjust the gap between doors panels (see step 3a & step 3b)

STEP 3a MOVE DOOR RIGHT



Turn the screw clockwise a little as shown to make the gap small.

STEP 3b MOVE DOOR LEFT



Turn the screw counterclockwise a little as shown to make the gap big.