

115mm

HGLRC Thor 1-2S Charger




PRODUCT INSTRUCCION MANUAL



156mm

1. 电池接入充电器时, 先确认电压开关所在位置是否与电池电压相对应。
2. 同一充电位置1S, 2S不能同时充电, 否则会烧坏电池或充电器。
3. 输入电压在规定范围内正负极无误, 否则损坏不再保修。
4. 转运及安装使用过程中注意静电防护。

2. 注意事项

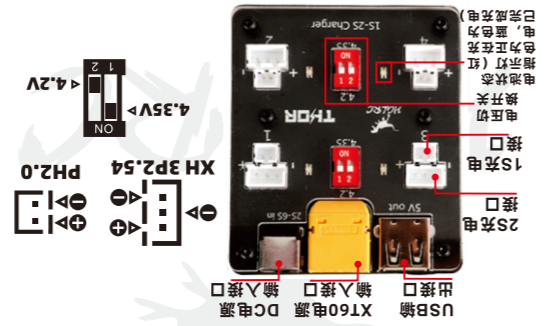

1. 支持XH 3P2.54/PH2.0的锂电池
 2. 最大支持四路电池同时充电
 3. 支持普通4.2V锂电池以及4.35V LiHV锂电池 (开关切换)
 4. DC 7-25V适配器输入或者XT60 2-6S锂电池输入 (自备)
 5. 支持USB输出5V/2A使用, 可给手机充电
- 输入电压: XT60/DC 7V-25V
USB输出电压: 5V 2A
电池类型: LiPo/LiHV
充电最大电流: (0.1-1.0A)X4
充电截止电压:
3.7V锂电池最大4.2V(±0.5%)
3.8V高压锂电池最大4.35V(±0.5%)
尺寸: 70mmx60mmx15mm
重量: 46.3克

1. 充电器参数

产品说明书




HGLRC Thor 1-2S 充电器

1. Charger specifications

input voltage: XT60/DC 7V-25V
USB Output voltage: 5V 2A
Battery type: LiPo/LiHV
Charging maximum current: (0.1-1.0A)X4
Charging cut off voltage:
Maximum 4.2V (± 0.5%) for 3.7V lithium battery
The maximum voltage of 3.8V high voltage lithium battery is 4.35v (± 0.5%)
Size: 70mmx60mmx15mm
Weight: 46.3g

1. Supports XH 3p2.54 / ph2.0 lithium batteries
2. Supports four way battery charging at the same time
3. Supports regular 4.2V lithium battery and 4.35v lihv lithium battery (with switch)
4. DC 7-25v adapter input or XT60 2-6S lithium battery input(not included)
5. USB Output 5V/2A for port, supports mobilephone recharging

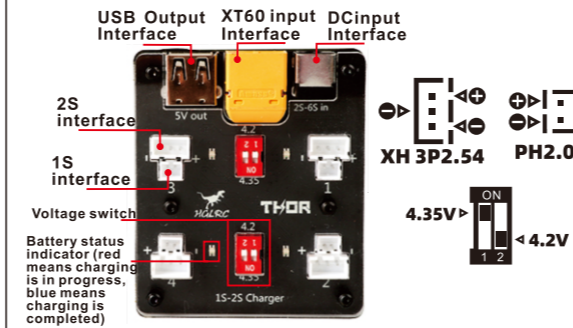

2. Warning:

1. When the battery is connected to the charger, please confirm whether the position of the voltage switch corresponds to the battery voltage.
2. 1S & 2S batteries cannot be charged at the same time in the same charging position, otherwise the battery or charger will be burned out.
3. Please make sure the input voltage is within the specified range. The positive and negative poles are correct. Otherwise, the damage caused is not warranted.
4. Pay attention to static electricity protection during transportation and installation.