


3TA040BL



Characteristic: full sealed, Epoxy encapsulated,
High dielectric strength, Three-phase current combination
detection , Iron core.

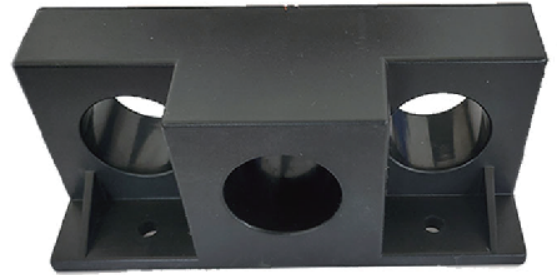


Technical Index:

- Mounting type: Suspend
- Core material: Silicon steel sheet
- Fair resistance: with UL94-V0
- Complaint with: GB1208-2006
- Operating temperature: -35°C ~ +85°C
- Storage temperature: -45°C ~ +95°C
- Frequency range: 50Hz-60Hz
- Dielectric strength: 3.5KV 50Hz 1min

Technical Parameters table:

Model	3TA040BL -150	3TA040BL -200	3TA040BL -250	3TA040BL -300	3TA040BL -400
Rated Input	150A	200A	250A	300A	400A
Rated output	100mA	100mA	100mA	100mA	100mA
Change ratio	1:1500	1:2000	1:2500	1:3000	1:4000
Max. sampling resistance	20 Ω				
Linearity	≤ 0.5%				
weight	-				

Schematic Diagram:

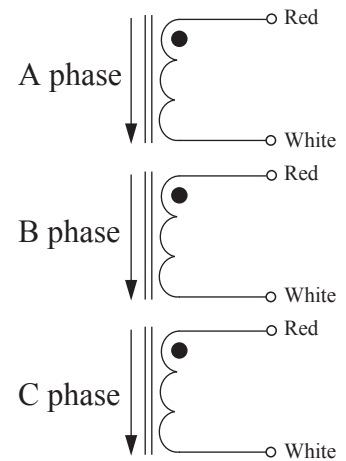

Leading wire specification:

0.3mm² cord

Leading wire color: White/Red

Standrd lead length: 40cm

Dimensions(in mm±0.5) :

