

3TA040BL(1A、5Aoutput)



Characteristic: full sealed, Epoxy encapsulated,
High dielectric strength, Three-phase current combination
detection , Iron core.



Technical Index:


- Mounting type: Suspend
- Core material: Silicon steel sheet
- Fair resistance: with UL94-V0
- Complaint with: GB1208-2006
- Operating temperature: $-35^{\circ}\text{C} \sim +85^{\circ}\text{C}$
- Storage temperature: $-45^{\circ}\text{C} \sim +95^{\circ}\text{C}$
- Frequency range: 50Hz-60Hz
- Dielectric strength: 3.5KV 50Hz 1min

Technical Parameters table:

Rated Input	200A	300A	400A
Rated output	1A	1A	1A
Change ratio	1:200	1:300	1:400
Accuracy	1%	1%	1%
Power			
Weight			

Rated Input	200A	300A	400A
Rated output	5A	5A	5A
Change ratio	1:40	1:60	1:80
Accuracy	1%	1%	1%
Power			
Weight			

Schematic Diagram:

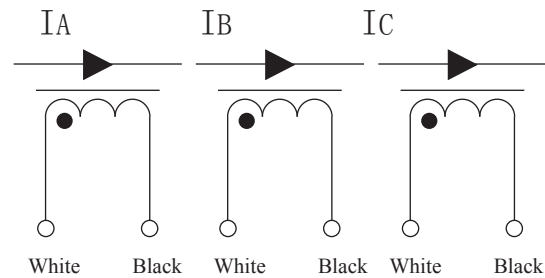

Leading wire specification:

1mm² Black and white twisted pair

Leading wire color: White/Black

Standrd lead length: 1m

Dimensions(in mm±0.5) :

