

HTS6



Detect DC, AC and pulse current, high insulation between primary side and the vice side circuit.

Change the connection mode of primary bus-bar can be converted into three measuring range.

Product application

- Metallurgy
- Welding mahine
- Robot
- Inverter power
- Inverter speed controller
- UPS uninterruptible power supply

Product features

- Light weight
- Low power consumption
- No insertion loss
- Fast response time
- Small size and beautiful appearance
- PCB mounting and easy to use

Product picture printing is for reference only, subject to the actual product



Electrical parameters:the following parameters are typical values, the actual values shall be subject to the actual measurement of the product

Rated input	±6A
Input measurement range	±9A
Rated supply voltage	+5V
Rated output	2.5V±0.625V
Accuracy	1%
Linearity	0.1%
Current consumption	≤20mA+Is
Load impedance	≥10KΩ
Zero offset voltage	≤±15mV
Response time	≤0.5μs
Weight	9g
Operation temperature	-25℃~+70℃
Storage temperature	-25℃~+70℃
Band width	DC~150KHz
Delectric strength	3KV 50Hz 1min

Primary turns	Rated input (A)	Rated output (V)	Connection way of primary pins
1	±6	2.5±0.625	
2	±3	2.5±0.625	
3	±2	2.5±0.625	

Calculation formula: $2.5V \pm 0.625V$


Forward direction: $2.5 + (I/I_{PN}) * 0.625$

Reverse direction: $2.5 - (I/I_{PN}) * 0.625$

I: Actual measured current

I_{PN} : Rated input current

Wiring diagram:

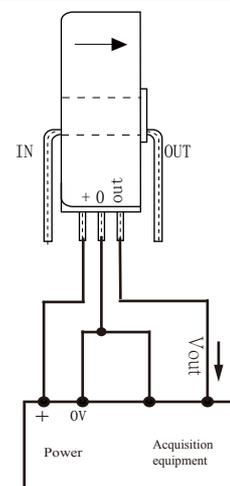

Dimensions(in mm±0.5) :

