

Detect DC, AC and pulse current, high insulation between primary side and the vice side circuit.

Product picture printing is for reference only, subject to the actual product

Product application

- Metallurgy
- Welding machine
- Inverter power
- Inverter speed controller
- UPS uninterruptible power supply

Product features


- High pressure resistant
- Low power consumption
- Beautiful appearance
- Fast response time
- Sub-plate mounting and easy to use



Electrical parameters: the following parameters are typical values, the actual values shall be subject to the actual measurement of the product

Rated input	±2000V	±3000V	±4000V	±5000V	±6000V	±8000V	±10000V
Input measurement range	±3000V	±4500V	±6000V	±7500V	±9000V	±10000V	±10000V
Rated output	±5V						
Accuracy	1%						
Linearity	0.2%						
Supply voltage	±12V/±15V						
Current consumption	≤20mA+I _s						
Load impedance	≥10KΩ						
Zero offset voltage	≤±30mV						
Response time	40~200 μs						
Weight	2.5Kg						
Operation temperature	-10℃~+70℃						
Storage temperature	-25℃~+70℃						
Band width	-						
Dielectric strength	10KV 50Hz 1min						

Wiring diagram:

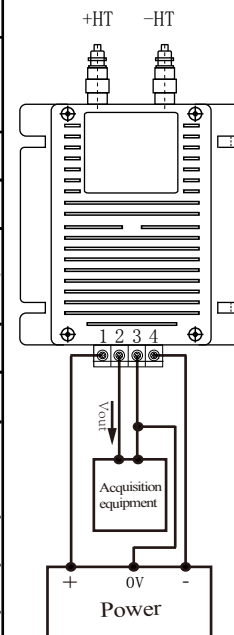

Terminal definition

- 1: V+
- 2: Vout
- 3: 0V
- 4: V-
- HT
- +HT

Dimensions(in mm±0.5) :

