

Characteristics:

1. Vacuum epoxy potting, 100°C/6 h high temperature aging, Twenty years of life, High electrical strength
2. High quality H18 silicon steel sheet, Low temperature, High efficiency
3. PBT engineering plastic, environmental protection, flame retardant, 120 degrees without deformation
4. Reasonable structure, Easy installation, Low noise, Strong earthquake sealed waterproof, moistureproof


Technical Index:

- Technical Index: Din-rail Mounting
 Flame resistance : UL94-V0
 Insulation class: B
 Operation temperature: -30°C ~ +40°C
 Work frequency: 50Hz ~ 60Hz
 Dielectric strength: Pri/Sec 3.5KV 50Hz 1min 5mA
 Sec 500V 50Hz 1min 5mA

Electrical parameters: The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Primary voltage	110V	220V	230V	380V	Unit
Primary voltage range	± 10				%
Power	15				VA
Voltage regulation	≤ 17				%
Temperature rising	≤ 20				°C
No load loss	≤ 0.9				W
weight	350				g

Product picture print for reference only, subject to the actual product




Standard output parameters Table:


(Delivery is subject to full load voltage)

Secondary output voltage		Secondary No-load Voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V × 2	6.7V	6.7V × 2	2500mA	1250mA × 2
7.5V	7.5V × 2	8.4V	8.4V × 2	2000mA	1000mA × 2
9V	9V × 2	10.1V	10.1V × 2	1666mA	833mA × 2
12V	12V × 2	13.4V	13.4V × 2	1250mA	625mA × 2
15V	15V × 2	16.8V	16.8V × 2	1000mA	500mA × 2
18V	18V × 2	20.1V	20.1V × 2	833mA	416.5mA × 2
24V	24V × 2	26.9V	26.9V × 2	625mA	312.5mA × 2

Schematic Diagram:




Single output





Double output

Dimensions (in mm±0.5)

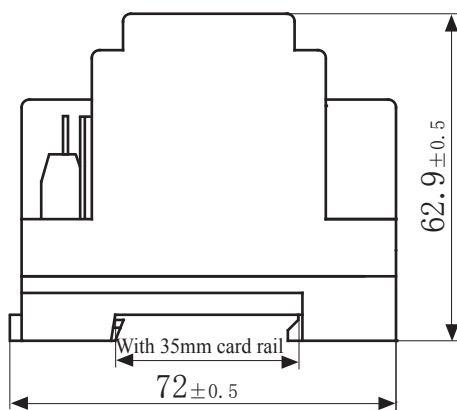

Front view

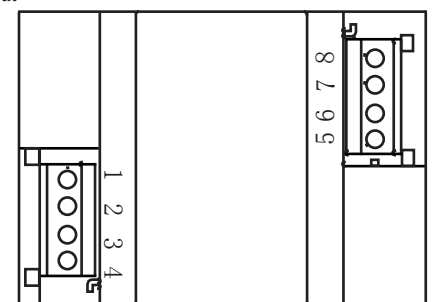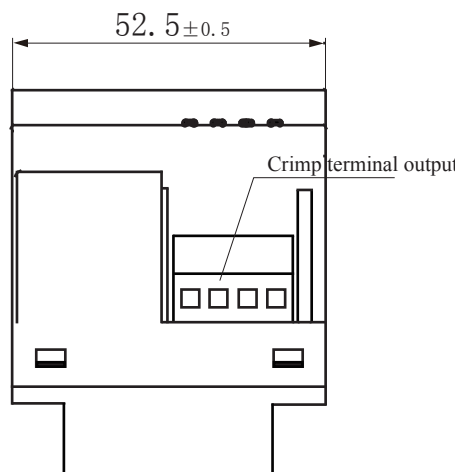

Top view