

## Characteristics:

1. Vacuum epoxy potting, 100℃/6 h high temperature aging, Twenty years of life, High electrical strength
2. High quality H18 silicon steel sheet, Low temperature, High efficiency
3. PBT engineering plastic, environmental protection, flame retardant, 120 degrees without deformation
4. Reasonable structure, Easy installation, Low noise, Strong earthquake sealed waterproof, moistureproof


## Technical Index:

- Technical Index: Din-rail Mounting
- Flame resistance : UL94-V0
- Insulation class: B
- Operation temperature: -30℃ ~ +40℃
- Work frequency: 50Hz ~ 60Hz
- Dielectric strength: Pri/Sec 3.5KV 50Hz 1min 5mA  
Sec 500V 50Hz 1min 5mA


Electrical parameters: The following parameters are typical values. The actual values shall be subject to the actual measurement of the product

Primary voltage	110V	220V	230V	380V	Unit
Primary voltage range	± 10				%
Power	40				VA
Voltage regulation	≤ 12				%
Temperature rising	≤ 28				℃
No load loss	≤ 2.5				W
weight	700				g

## Dimensions (in mm±0.5)

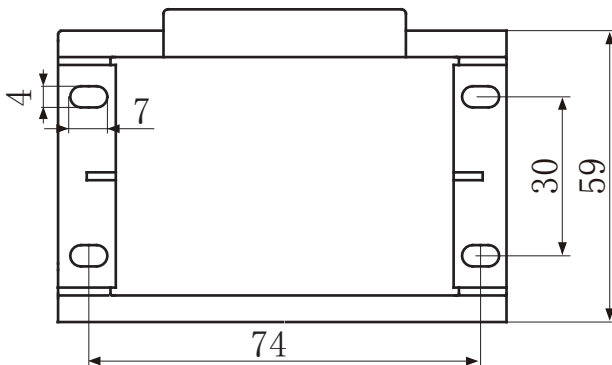


Front view

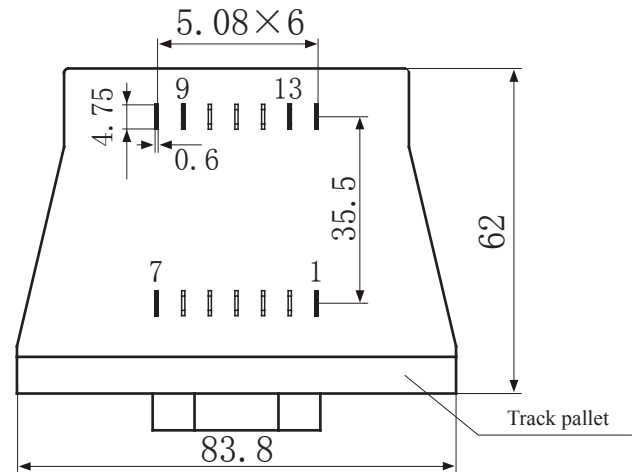

Top view

Product picture print for reference only, subject to the actual product

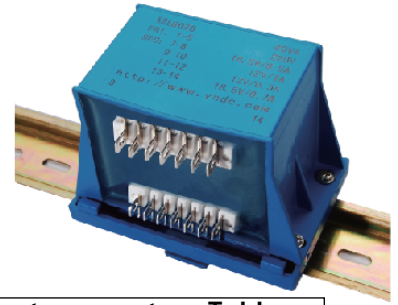

## Standard output parameters Table:

(Delivery is subject to full load voltage)

Secondary output voltage		Secondary No-load Voltage		Secondary full load current	
Single	Double	Single	Double	Single	Double
6V	6V × 2	6.9V	6.9V × 2	666mA	333mA × 2
7.5V	7.5V × 2	8.6V	8.6V × 2	533mA	266.5mA × 2
9V	9V × 2	10.3V	10.3V × 2	444mA	222mA × 2
12V	12V × 2	13.8V	13.8V × 2	333mA	166.5mA × 2
15V	15V × 2	17.2V	17.2V × 2	266mA	133mA × 2
18V	18V × 2	20.7V	20.7V × 2	222mA	111mA × 2
24V	24V × 2	27.5V	27.5V × 2	166mA	83mA × 2

## Schematic Diagram:

