

# Universal SCR Trigger Transformer



Model:KMB281-201

characteristics:

Trigger SCR over 4000A

Technical indicators:

Installation method: PCB


Flame resistance: UL94-V0

Operating temperature: -20°C~+50°C

Storage temperature: -40°C~+85°C

Frequency range: 1KHz~10KHz


Dielectric strength: 5KV 50Hz 1min

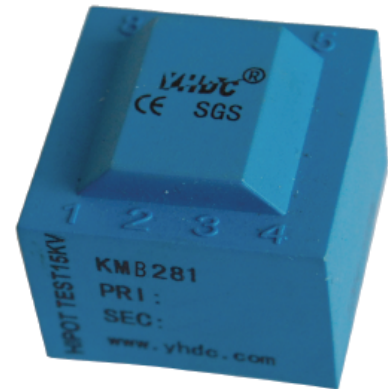


Electrical parameters:

Vout microsecond integral	1500	μvs
Pulse width (D=1:2)	100	μs
Ratio	2:1	
Input amplitude	15	V
Output amplitude	>4	V
Load impedance	7	Ω
Leading edge time	≤1	μs
Main circuit operating voltage	660	V
Weight		g


Connection diagram:

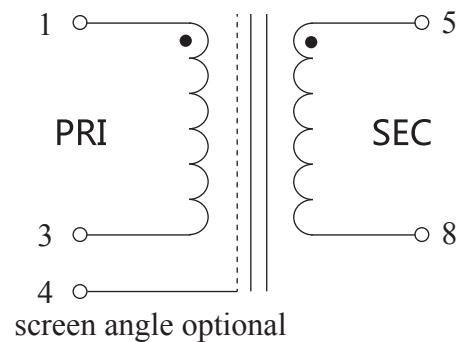


Dimensions (in mm) :



Top View

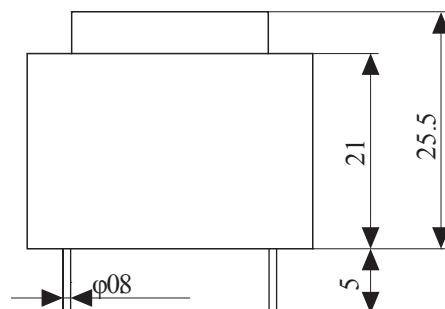

Front View

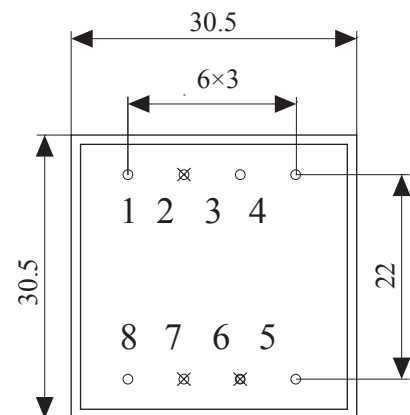

Bottom View