

Characteristics:

Suitable for 2000A SCR pulse train trigger.

Product picture print for reference only,
subject to the actual product

Technical Index:

Installation method: PCB

Flame resistance : UL94-V0


Operation temperature: -20 °C ~ +50 °C

Storage temperature: -30 °C ~ +85 °C



Work frequency: 1KHz ~ 50KHz

Dielectric strength: Pri/Sec 5KV 50Hz 1min

Sec/Sec 500V 50Hz 1min




Schematic Diagram:




Electrical parameters: (The following parameters are typical values and actual values will be subject to product testing)

Project	Parameter	Model	KMB418-079	KMB418-201	KMB418-301	KMB418-080	KMB418-211	KMB418-311	Unit
	Vout microsecond integral		1200	2250	3600	1200	2250	3120	μvs
	Input pulse amplitude		8	15	24	8	15	24	V
	Output pulse amplitude		≥5	≥5.8	≥6.4	≥6.2 × 2	≥5.6 × 2	≥6 × 2	V
	Turns ratio		1:1	2:1	3:1	1:1:1	2:1:1	3:1:1	
	Load resistance		7	7	7	7	7	7	Ω
	duty ratio		1:2	1:2	1:2	1:2	1:2	1:2	
	Pulse width		150	150	150	150	150	130	μs
	Leading edge time		≤5	≤5	≤5	≤5	≤5	≤5	μs
	Main circuit operating voltage		660	660	660	660	660	660	KV
	Weight		47g	47g	47g	47g	47g	47g	g

Dimensions (in mm±0.5) :

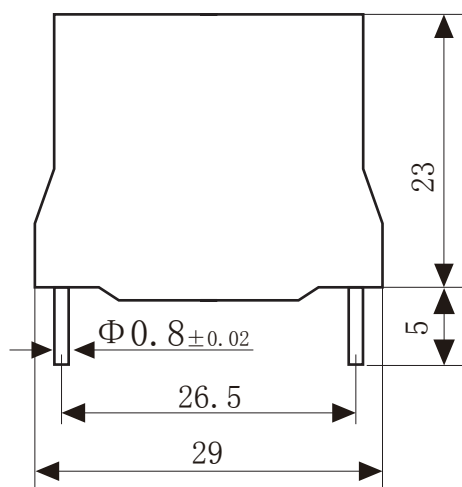

Top view

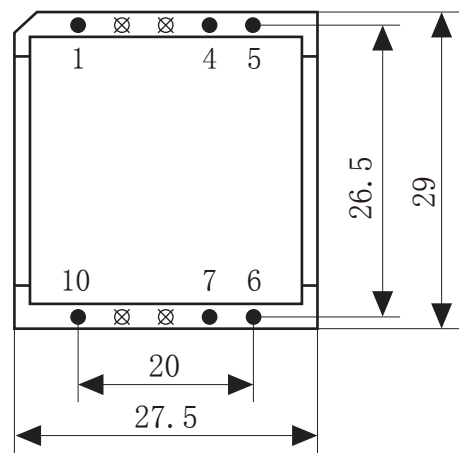

Bottom View